



SCALE DRAWING 1:1

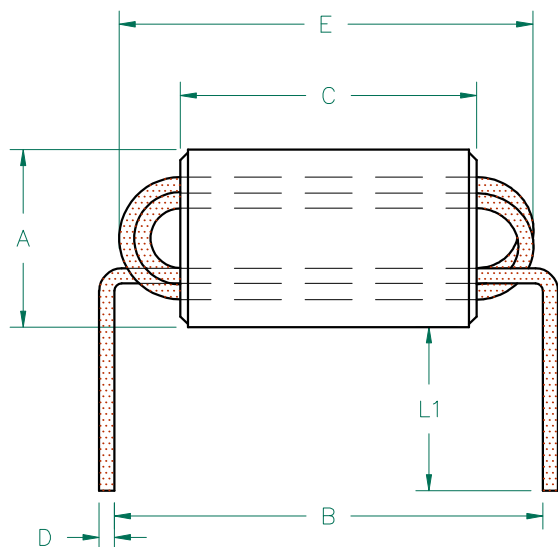

ELECTRICAL TESTING

TEST:	Z	Z
FREQUENCY	25 MHz	100 MHz
NOMINAL	538 Ω	835 Ω
MINIMUM	—	626 Ω

**UNCONTROLLED
DOCUMENT**

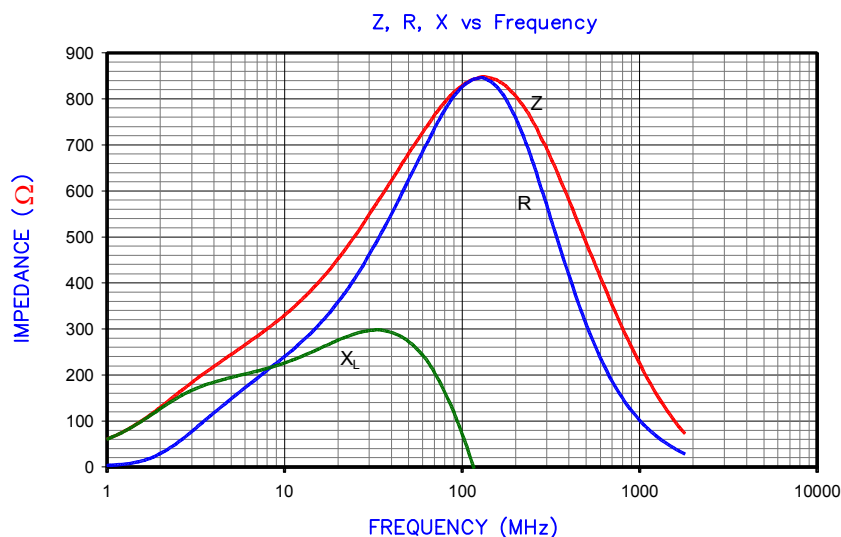

NOTES:

- WIRE: 2-1/2 TURN, 24 AWG TCW 0.51 [.020] DIA.
- PLATING: 100% TIN $5\mu \pm 2\mu$ [200 $\mu\text{in} \pm 80\mu\text{in}$]
- LEADS:
 - LEADS SOLDERABILITY CONFORMS TO MIL-STD-202F, METHOD 208F.
- REF. STEWARD CORE P/N 28C0236-000.
- WEIGHT/1000 1.22 kgs. 2.7 lbs.

AGILENT E4991A RF Impedance/Material Analyzer
HP 16194A Test Fixture

DIMENSIONS:

A	5.99 [.236]	+	0.13 [.005]
B	14.99 [.590]	+	1.50 [.059]
C	10.00 [.394]	+	0.25 [.010]
D	0.51 [.025]		TYP.
E	14.61 [.575]		MAX.
L1	5.99 [.236]	+	0.76 [.030]

DIMENSIONS ARE IN mm (INCHES).

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
F	CORRECT NOTE 5	07/07/05	JRK
E	CHANGE P/N TO -10 REV NOTES 2&5	10/07/03	JRK
D	UPDATE PRINT FORMAT MODIFY NOTES ADD Z R XL CURVE	02/20/02	JRK
C	UPDATE PRINT FORMAT	08/28/97	BAC
B	UPDATE PART NUMBER FOR CATALOG	11/20/95	BAC
A	ORIGINAL DRAFT	02/07/94	JAZ
REV	DESCRIPTION	DATE	INT

Steward

PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
28C0236-0BS-10	F	ASSEMBLY	JAZ
DATE:	SCALE:	SHEET:	
02/07/94	4 : 1	STEWARD 28	
CAD #	TOOL #		
28C0236-0BS-10-F	C0236		