




CC2824E113R-10

UNCONTROLLED
DOCUMENT

ELECTRICAL SPECIFICATION @ 25°C
OPERATING TEMPERATURE RANGE: -40°C TO +125°C

PARAMETER SYMBOL	TEST LEADS	CONDITIONS	REQUIREMENTS		
			MIN	TYP	MAX
Lp (μH)	1-4/2-3	@ 100KHz/ 50mV	7.7	11	14.3
L LEAKAGE (μH)	1-4 (s' 2-3)	@ 100KHz/ 50mV		0.05	
TRP			1 : 1 +/- 5%		
DCR(Ω)	1-4/2-3			0.12	0.156
Hi-pot	wdg-wdg	(Vac) .5mA, 2sec.	250		
I (mA)					800

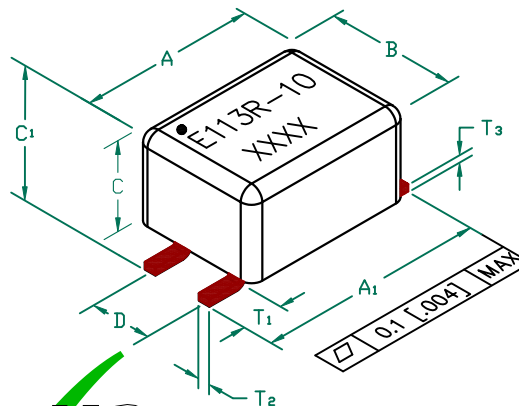


PHYSICAL DIMENSIONS:

A	7.50	[.295]	+	MAX.
A1	9.00	[.354]	+	0.40 [.016]
B	5.50	[.217]	+	MAX.
C	3.80	[.150]	+	MAX.
C1	4.90	[.193]	+	MAX.
D	2.54	[.100]	+	0.10 [.004]
T1	1.75	[.069]	+	TYP.
T2	0.50	[.020]	+	0.10 [.004]
T3	0.30	[.012]	+	0.10 [.004]


WEIGHT/1000 0.28 kgs [.62 Lbs]

NOTES: UNLESS OTHERWISE SPECIFIED


1. TAPED AND REELED ON 13" REELS, 1500 PCS/REEL.
2. OPEN BOTTOM CONSTRUCTION.

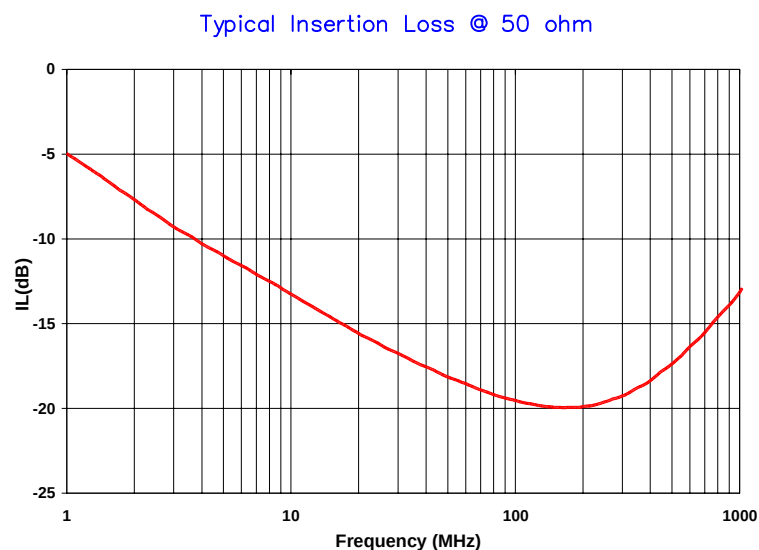

LAND PATTERNS FOR REFLOW SOLDERING

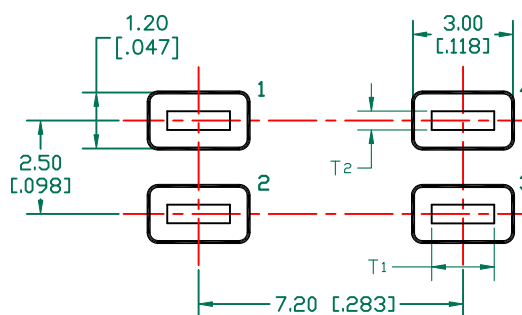

RECOMMENDED SOLDERING CONDITIONS

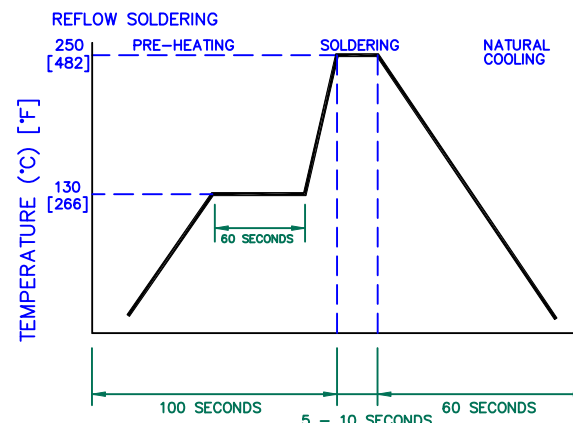

DIMENSIONS ARE IN mm [INCHES].				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
				Steward PROJECT/PART NUMBER: CC2824E113R-10 REV: A PART TYPE: ASSEMBLY DRAWN BY: JRK DATE: 06/08/05 SCALE: NTS SHEET: 2 of 2 CAD # CC2824E113R-10-A			
A	ORIGINAL DRAFT	06/08/05	JRK				
REV	DESCRIPTION	DATE	INT				