



PRODUCT DATASHEET

LedilStar series

last update 25/4/2014

DETAILS

Product Number	C10270_LEDILSTAR-P-W
Family	LedilStar
Type	Lens
Color	clear
Diameter	35 mm
Height	24,6 mm
Style	round
Optic Material	PMMA
Holder Material	
Fastening	screw, glue
Status	ready
ROHS Compliant	Yes
Date Updated	25/04/2014

OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Efficiency	cd/lm	Connector
Ostar Projection	32 deg	Wide	-	sim: 0.000	-



D


C

B

A


4

4

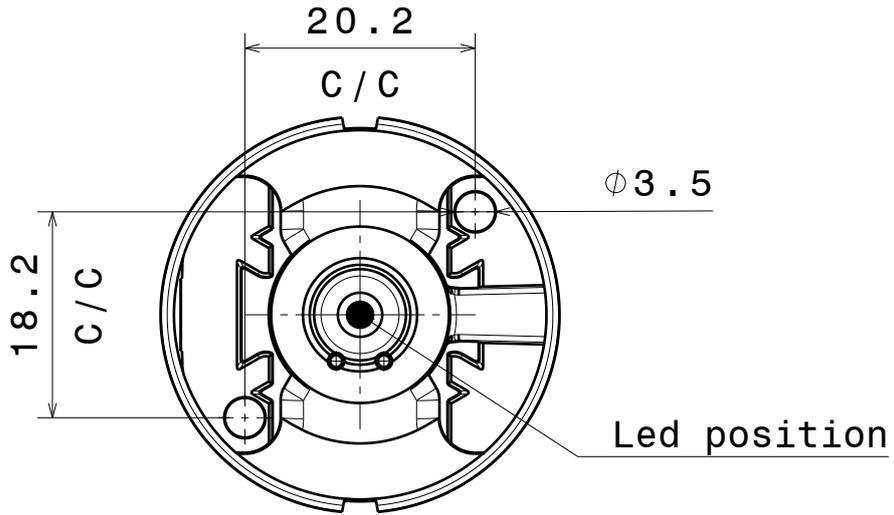



3

3

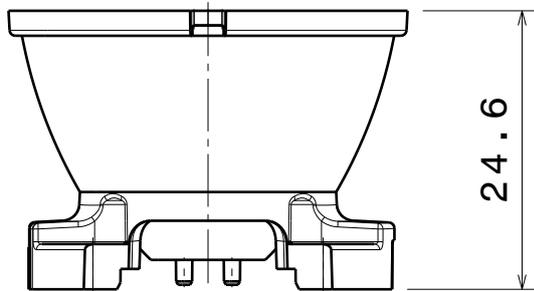

2

2

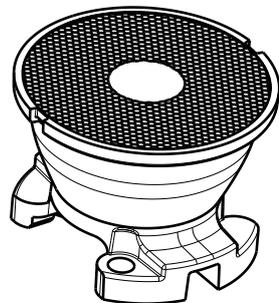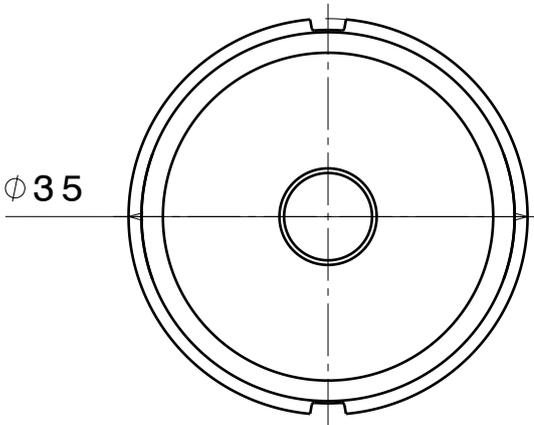

Isometric view 1:1

1

1

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures:
Up to 30mm class M, otherwise class C.
According to DIN ISO 2768-2
Form and position: class L

LEDiL Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland

THIRD ANGLE PROJECTION:

DRAWING TITLE
Datasheet_Ledilstar-P

This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy."

SIZE	PART NUMBER
A4	-


SCALE	3:2	WEIGHT	-	SHEET	1/1
-------	-----	--------	---	-------	-----

D

A

Ledil Oy C10270_Ledilstar-P-W C10270_Ledilstar-P-W / LDC (Linear)


Luminaire: Ledil Oy C10270_Ledilstar-P-W C10270_Ledilstar-P-W
Lamps: 1 x Osram-os Projection (whiŠ™ŇA)

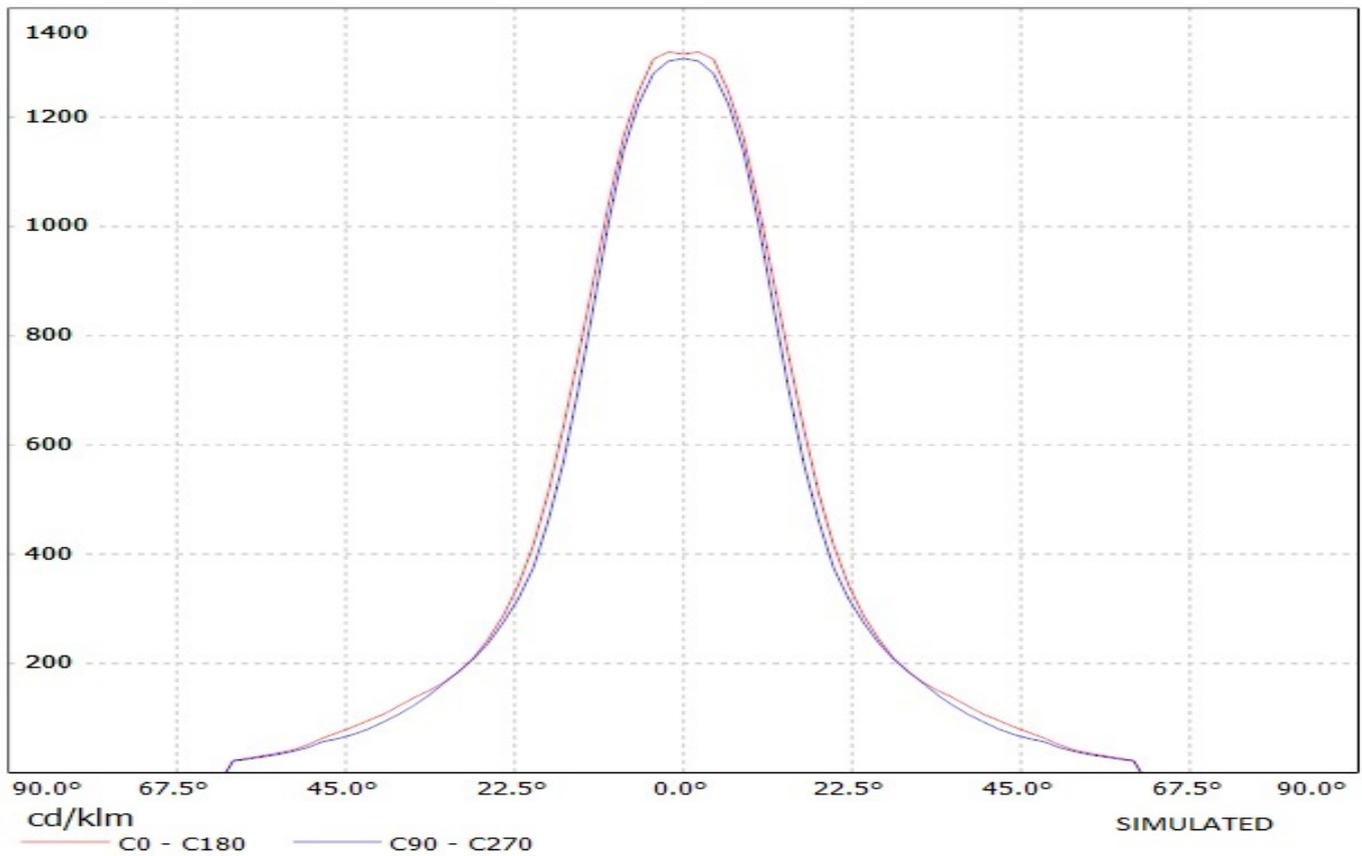

Ledil Oy C10270_Ledilstar-P-W C10270_Ledilstar-P-W / LDC (Polar)

Luminaire: Ledil Oy C10270_Ledilstar-P-W C10270_Ledilstar-P-W

Lamps: 1 x Osram-os Projection (whiš™ŇA

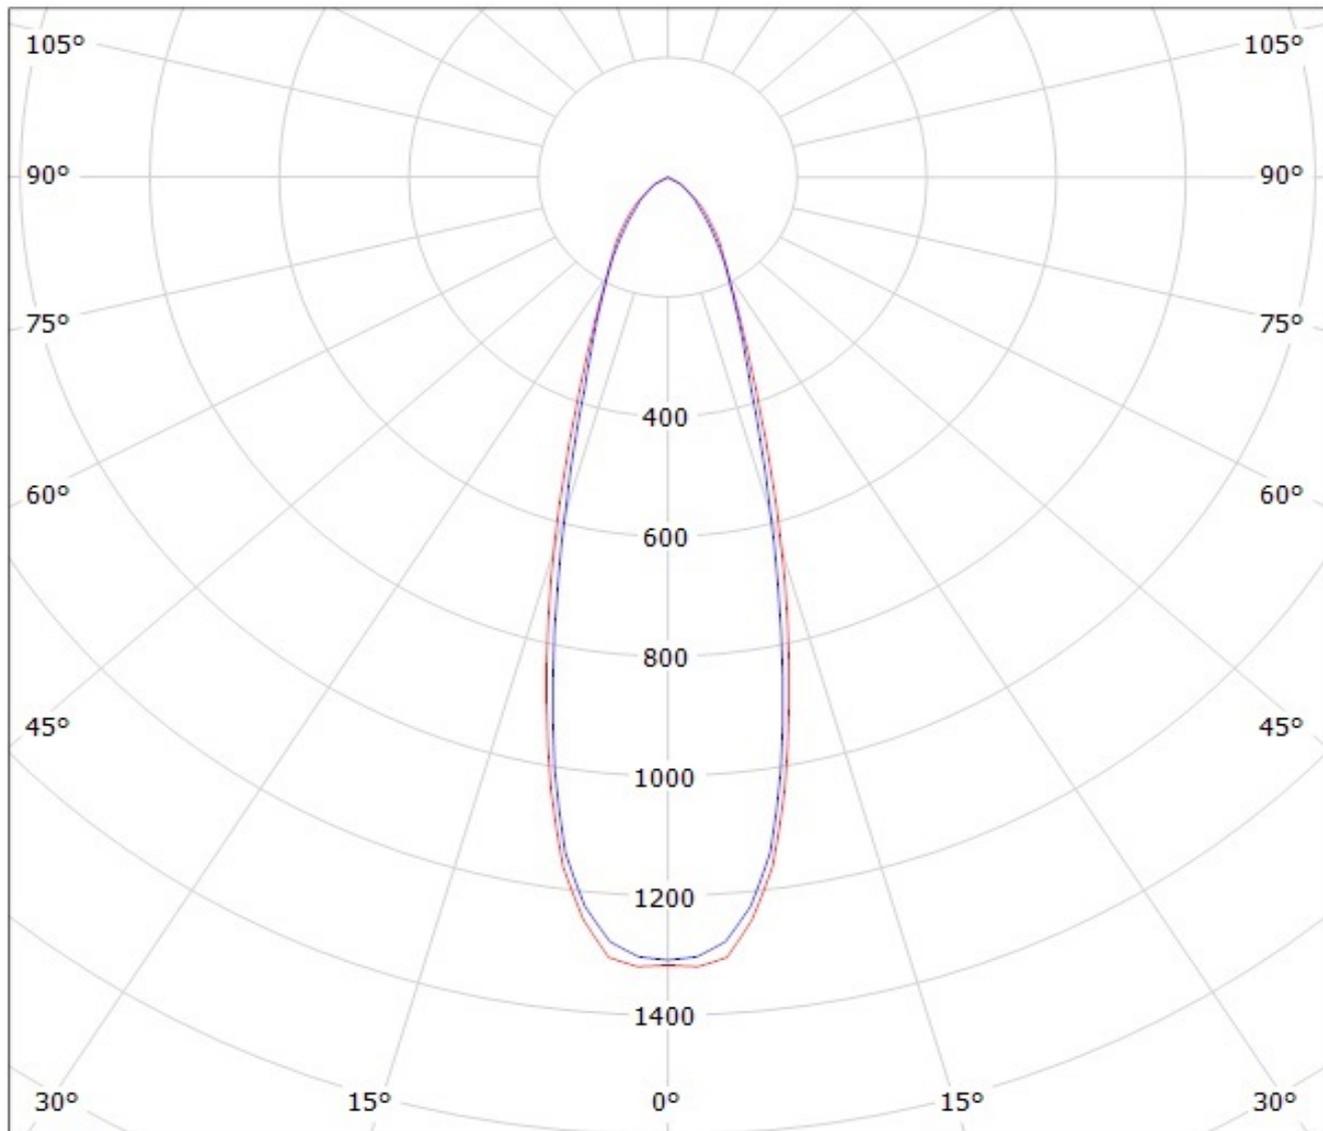

cd/klm

— C0 - C180

— C90 - C270

SIMULATED

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.