

**Ordering number C12360_STRADA-2X2-DNW**

Family	Strada-Module	FWHM	Asym degrees
Type	Lens array	Efficiency	93 %
LED	XP-G	cd/Im	0.440
Color	Clear	Gerber File	Available
Diameter	50x50 mm		
Height	11 mm		
Style	Square		
Optic Material	PMMA		
Holder Material	-		
Fastening	Screw, pin, glue		
Status	Ready		

**Ordering number C12362_STRADA-2X2-DWC**

Family	Strada-Module	FWHM	Asym degrees
Type	Lens array	Efficiency	93 %
LED	XP-G	cd/Im	0.470
Color	Clear	Gerber File	Available
Diameter	50x50 mm		
Height	6 mm		
Style	Square		
Optic Material	PMMA		
Holder Material	-		
Fastening	Screw, pin, glue		
Status	Ready		

**Ordering number C12419_STRADA-2X2-A-T**

Family	Strada-Module	FWHM	Asym degrees
Type	Lens array	Efficiency	93 %
LED	XP-G	cd/Im	0.450
Color	Clear	Gerber File	Available
Diameter	50x50 mm		
Height	7.3 mm		
Style	Rectang		
Optic Material	PMMA		
Holder Material	-		
Fastening	Screw, pin, glue		
Status	Ready		

**Ordering number C13300_STRADA-2X2-T2**

Family	Strada-Module	FWHM	Asym degrees
Type	Lens array	Efficiency	94 %
LED	XP-G	cd/Im	1.100
Color	Clear	Gerber File	Available
Diameter	50 + 50 mm		
Height	7.7 mm		
Style	Square		
Optic Material	PMMA		
Holder Material	-		
Fastening	Screw, pin, glue		
Status	Ready		

IESNA Type II Street light optic Suitable for narrow roads and

**Ordering number** C13301_STRADA-2X2-T3

Family	Strada-Module	FWHM	asymmetric degrees
Type	Lens array	Efficiency	94 %
LED	XP-G	cd/Im	0.700
Color	Clear	Gerber File	Available
Diameter	50 x 50 mm		
Height	7 mm		
Style	Square	IESNA Type III Street light optic	
Optic Material	PMMA		
Holder Material	-		
Fastening	Screw, pin, glue		
Status	Ready		

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.



PRODUCT DATASHEET Strada-Module series

last update 15/4/2013

GENERAL INFORMATION

- Product series especially designed & optimized for XP-G series of LEDs.
- Special care taken to make light distribution as uniform as possible.
- Lens material optical grade PMMA with high UV and temperature resistance. Allows use of high current and temperature conditions.

Please find more information about used material from below:


http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%20N%20UL94_Yellow%20Card.pdf

<http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%20N%20PLEXIGLAS-Datasheet.pdf>

LEDiL Oy C13300_STRADA-2X2-T2_(XP-G) Eff.97.9% / LDC (Linear)

Luminaire: LEDiL Oy C13300_STRADA-2X2-T2_(XP-G) Eff.97.9%


Lamps: 1 x XP-G (249lm@250mA)

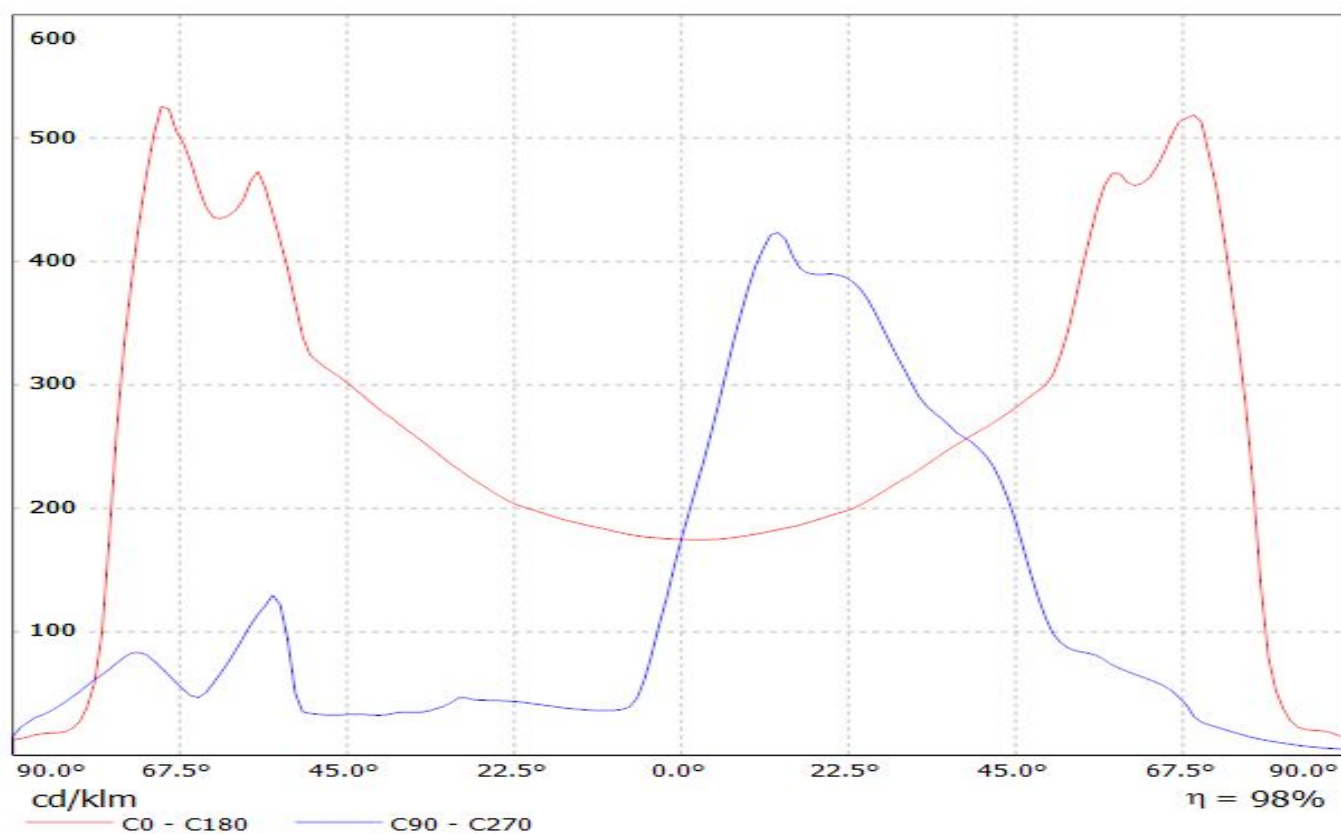

LEDiL Oy C13301_STRADA-2X2-T3_(XP-G) Eff.94.2% / LDC (Linear)

Luminaire: LEDiL Oy C13301_STRADA-2X2-T3_(XP-G) Eff.94.2%


Lamps: 1 x CREE XP-G2 (259lm@250mA)

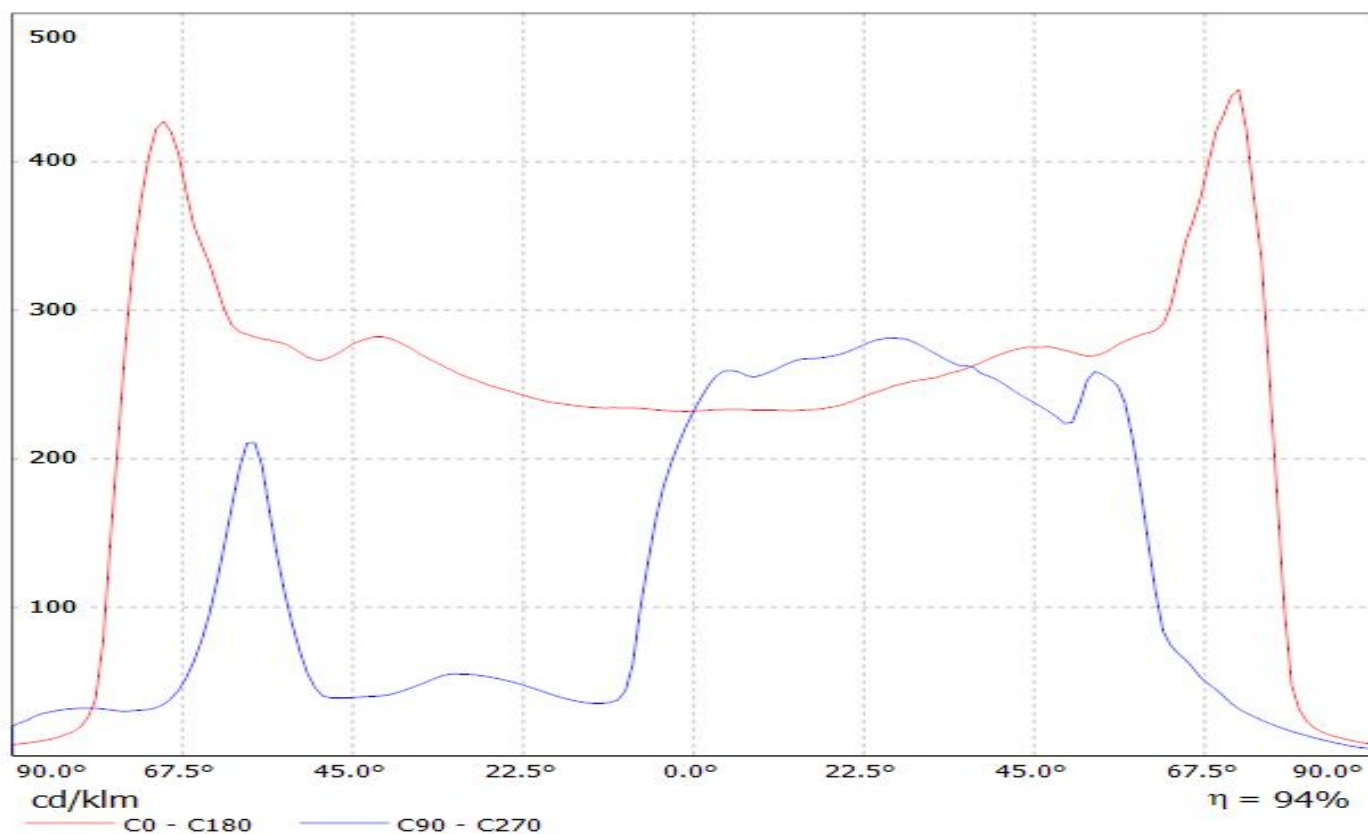

LEDiL Oy C13300_STRADA-2X2-T2_(XP-G) Eff.97.9% / LDC (Polar)

Luminaire: LEDiL Oy C13300_STRADA-2X2-T2_(XP-G) Eff.97.9%

Lamps: 1 x XP-G (249lm@250mA)

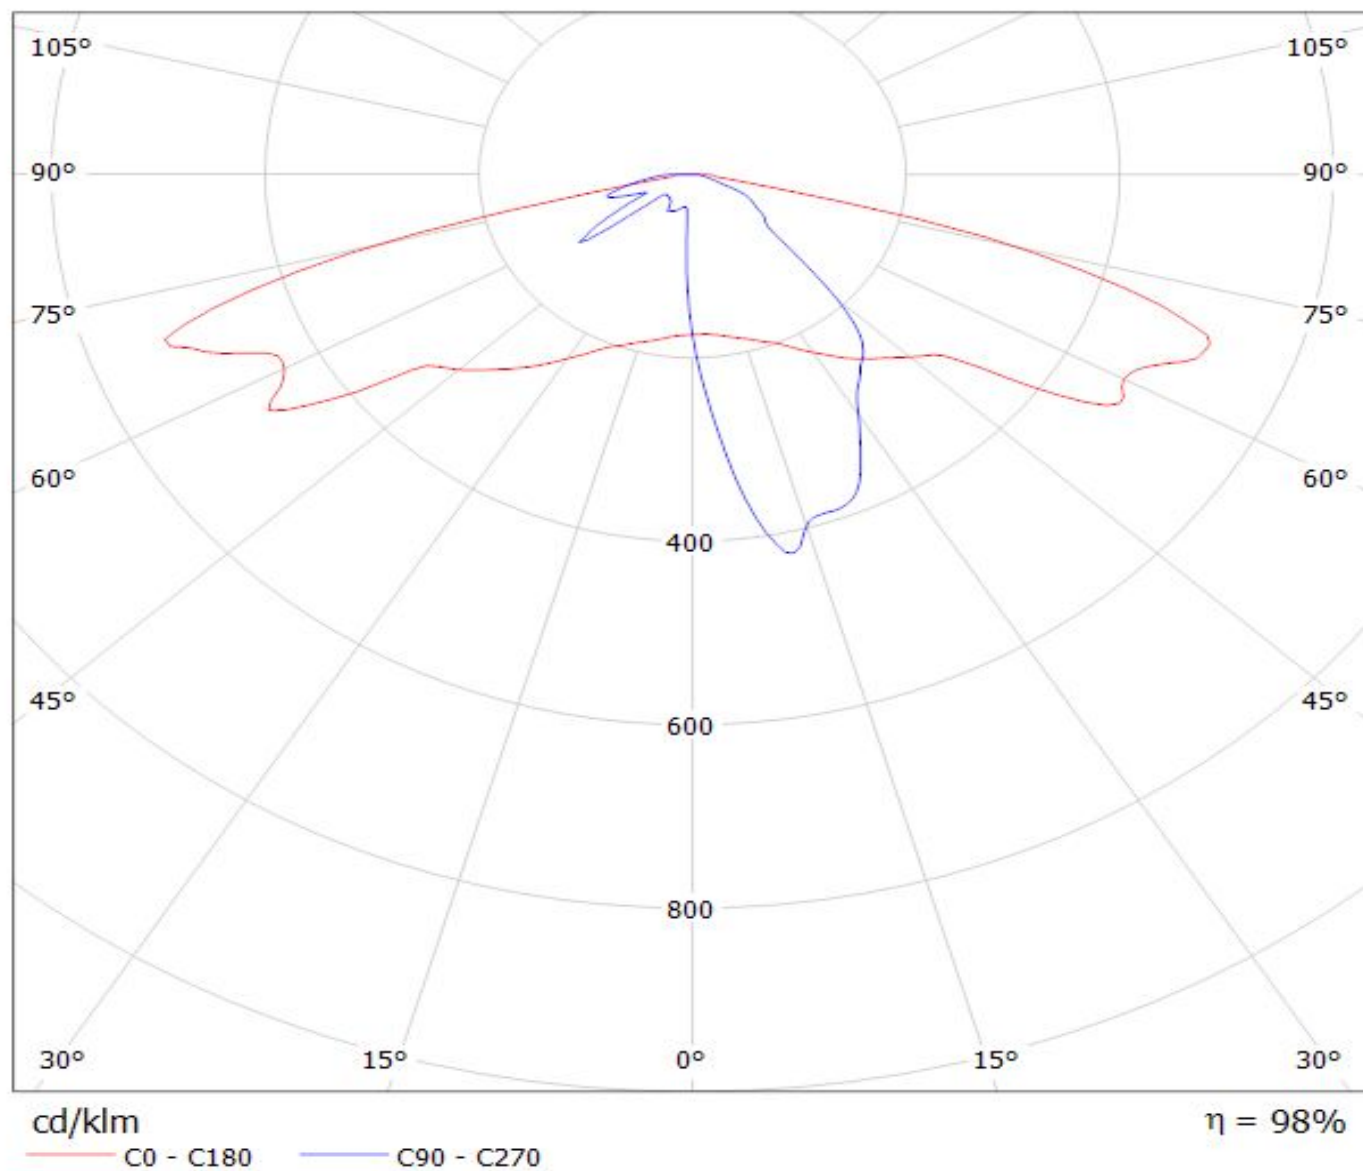

LEDiL Oy C13301_STRADA-2X2-T3_(XP-G) Eff.94.2% / LDC (Polar)

Luminaire: LEDiL Oy C13301_STRADA-2X2-T3_(XP-G) Eff.94.2%

Lamps: 1 x CREE XP-G2 (259lm@250mA)

