


DETAILS


Product Number	C14613_FLARE-MAXI-T
Family	Flare
Type	Lens
Color	clear
Diameter	43x28,4 mm
Height	15,5 mm
Style	rectang
Optic Material	PMMA
Holder Material	
Fastening	screw, pin
Status	ready
ROHS Comliant	Yes
Date Updated	21/12/2015



OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Effi- ciency	cd/lm	Connector
MK-R	76+19 deg	Asymmetric	89 %	1.450	-
LUXEON M	82+21 deg	Asymmetric	93 %	1.300	-

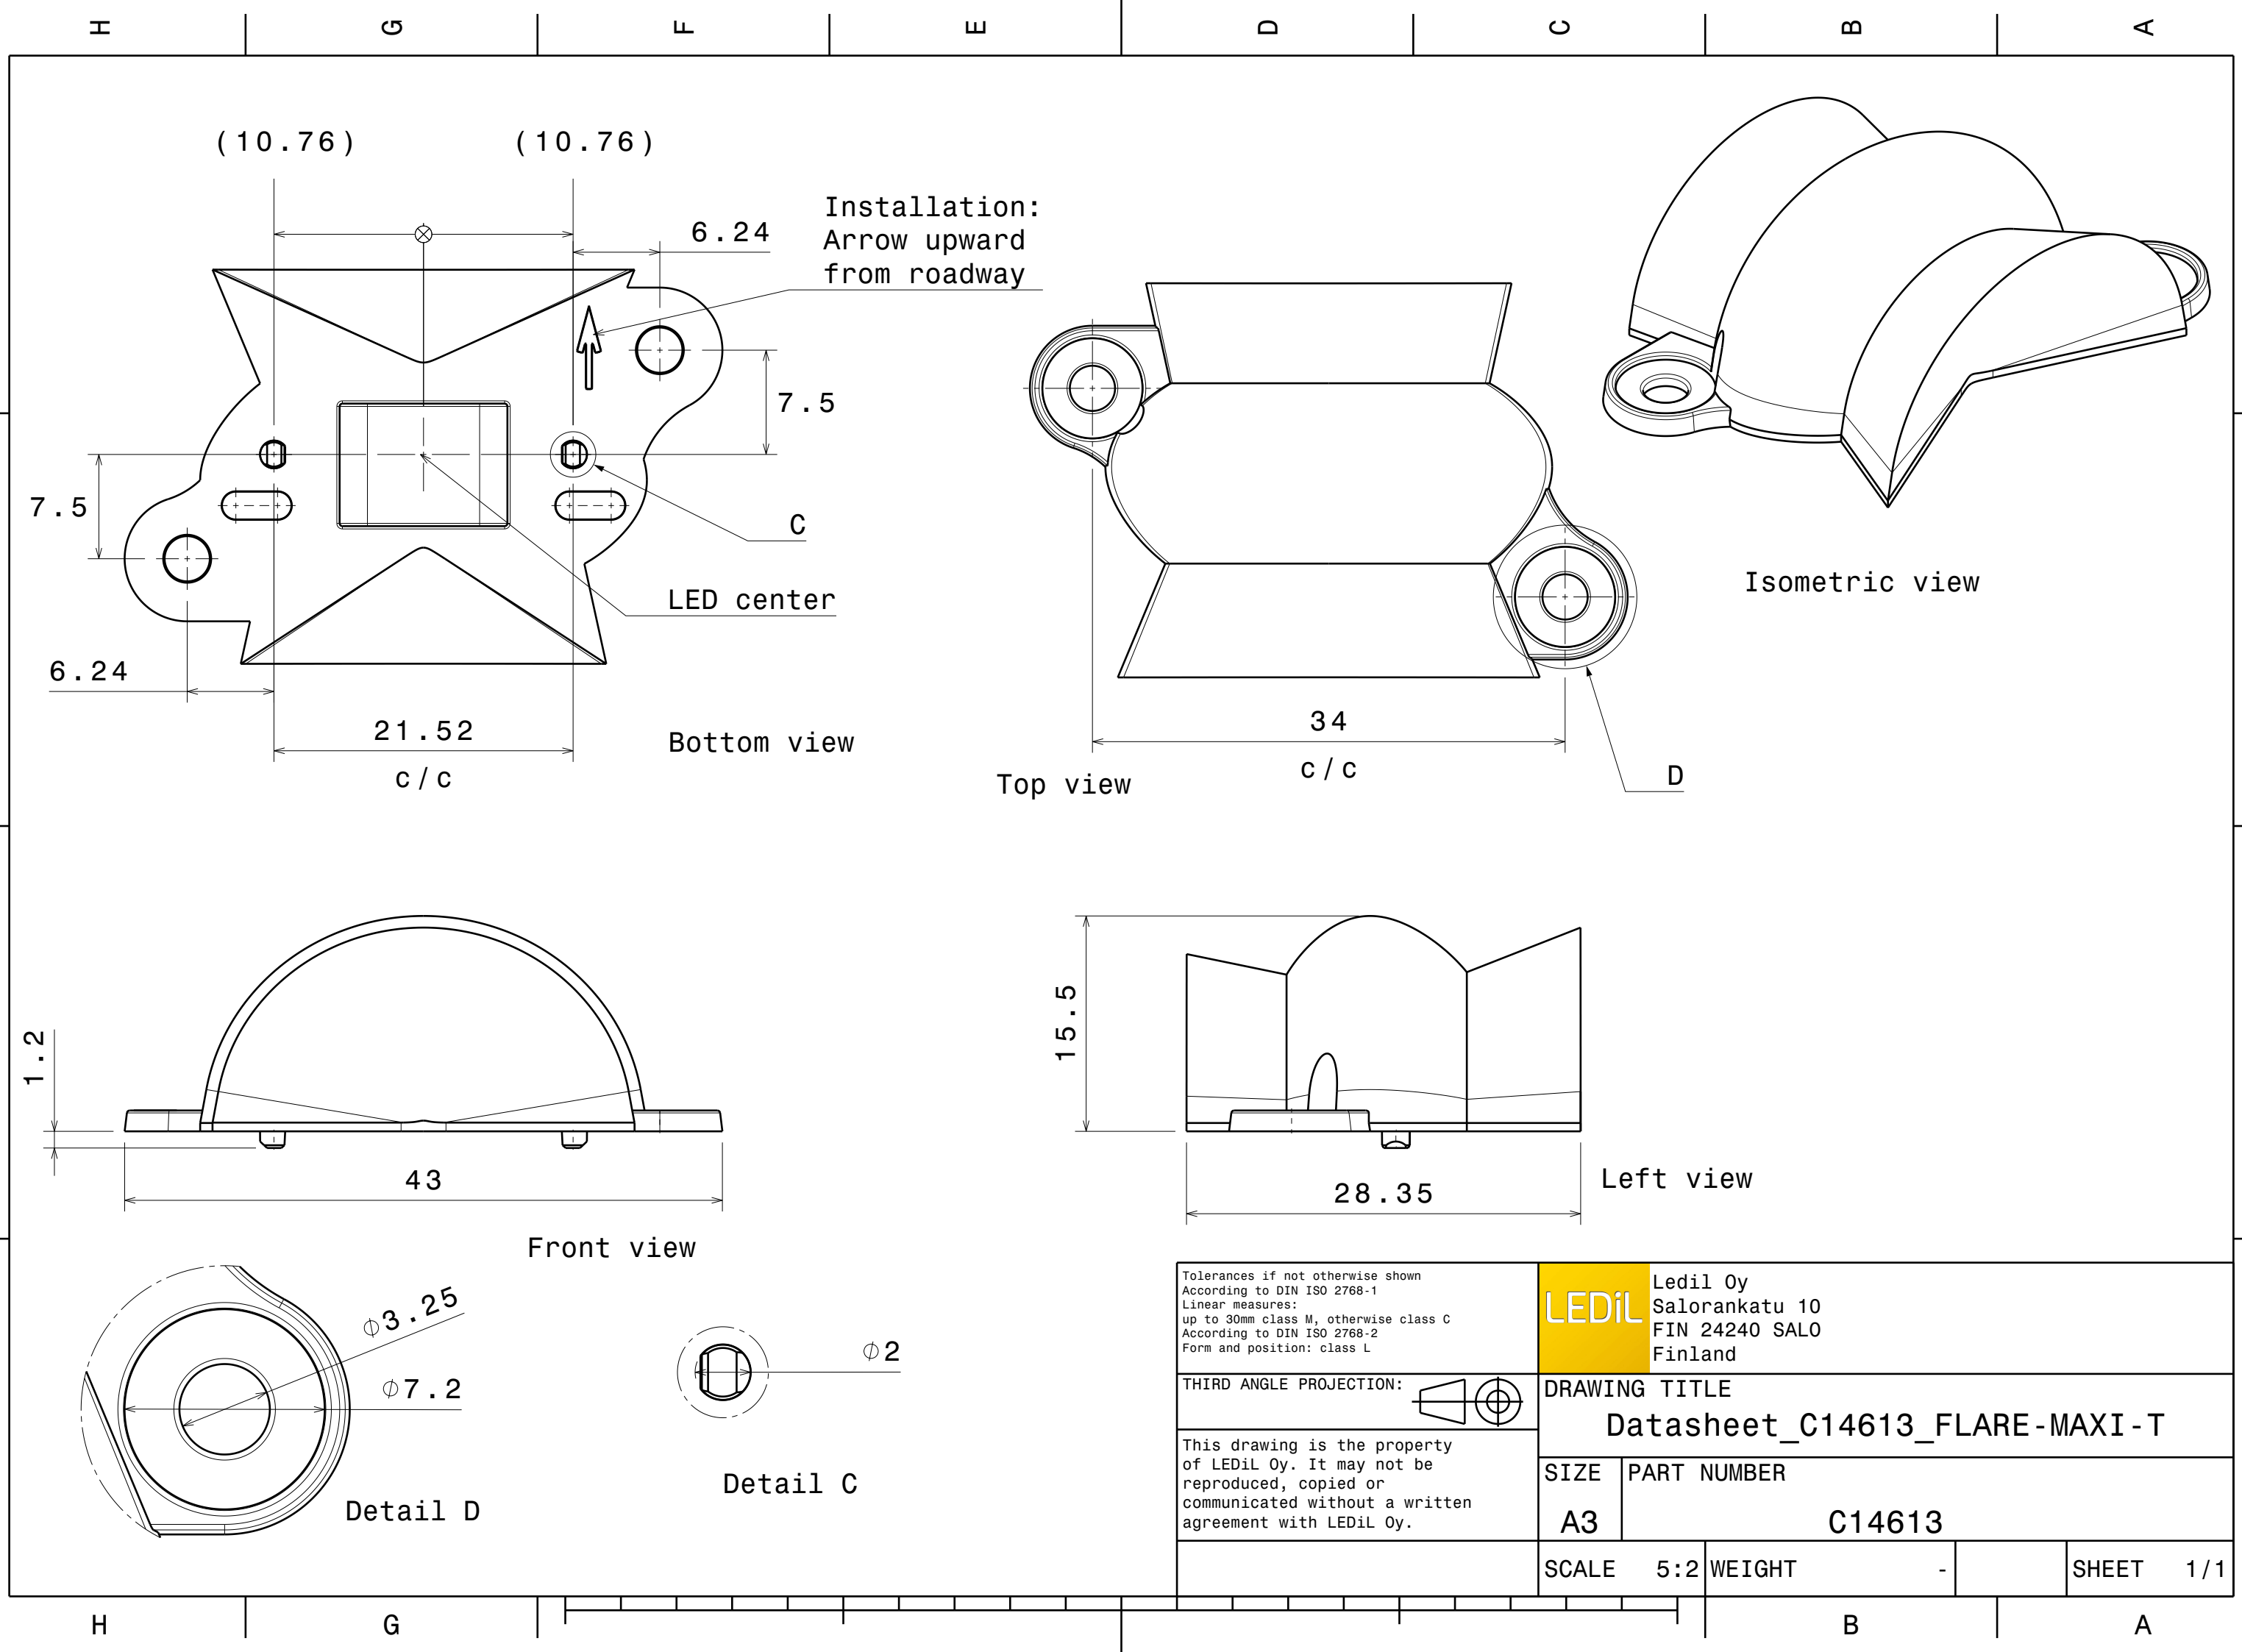


Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: up to 30mm class M, otherwise class C According to DIN ISO 2768-2 Form and position: class L	
THIRD ANGLE PROJECTION: 	
This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.	

LEDiL Ledil Oy Salorankatu 10 FIN 24240 SALO Finland	
DRAWING TITLE Datasheet_C14613_FLARE-MAXI-T	
SIZE A3	PART NUMBER C14613
SCALE 5:2	WEIGHT -
SHEET 1/1	


Luminaire: Ledil C14613_FLARE-MAXI-T_(MK-R)

Lamps: 1 x Cree_MK-R_(MKRAWT-0-27F-G2-B0-H-01)_191.367lm@250mA_CCT=2700K_P=1.4045W_I=0.25A

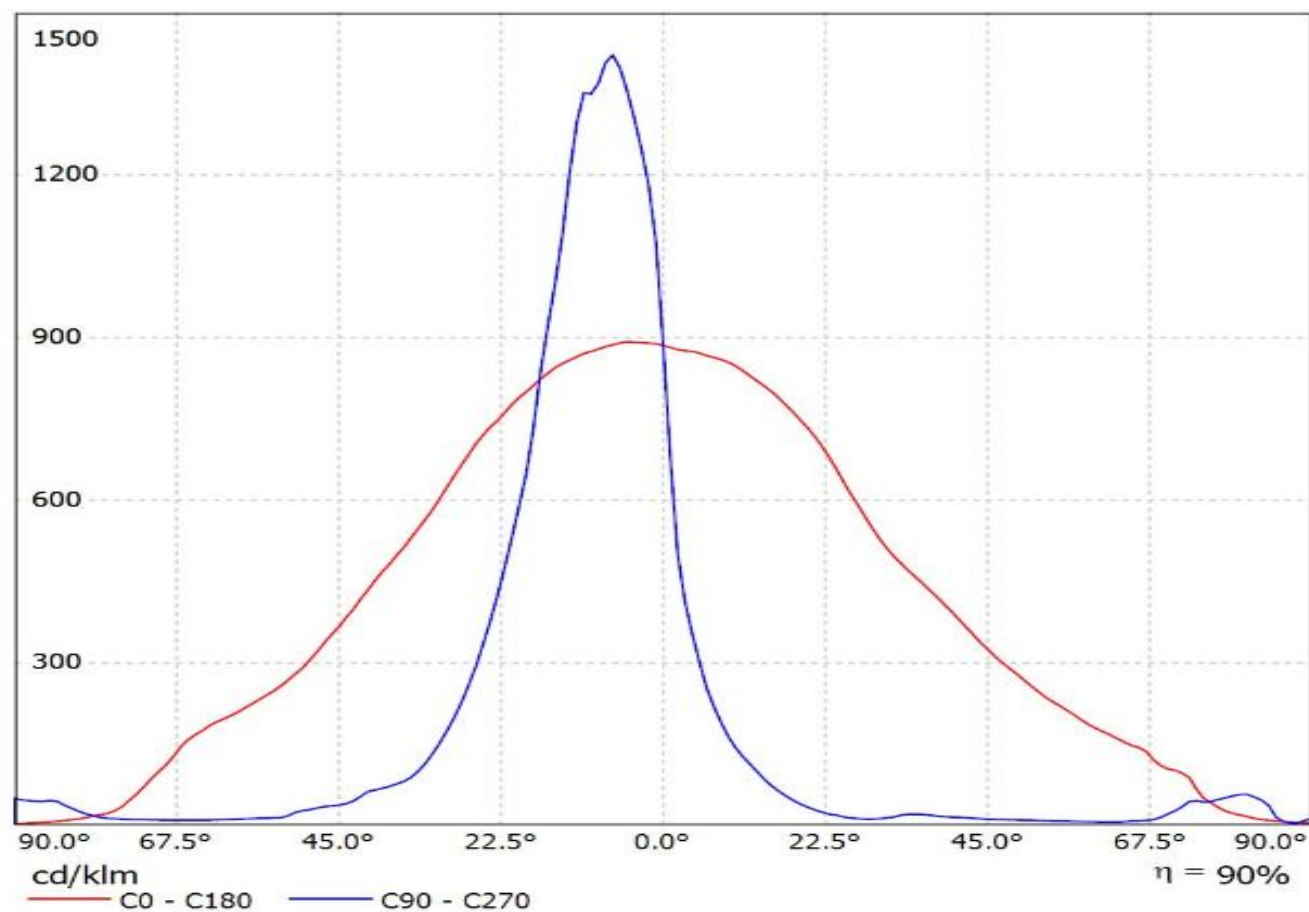


Luminaire: LEDiL Oy C14613_FLARE-MAXI-T_(Luxeon_M)

Lamps: 1 x Philips_Lumileds_Luxeon_M_(LXR7_SW40)_340.894lm@250mA_P=2.72366W_I=0.2499A

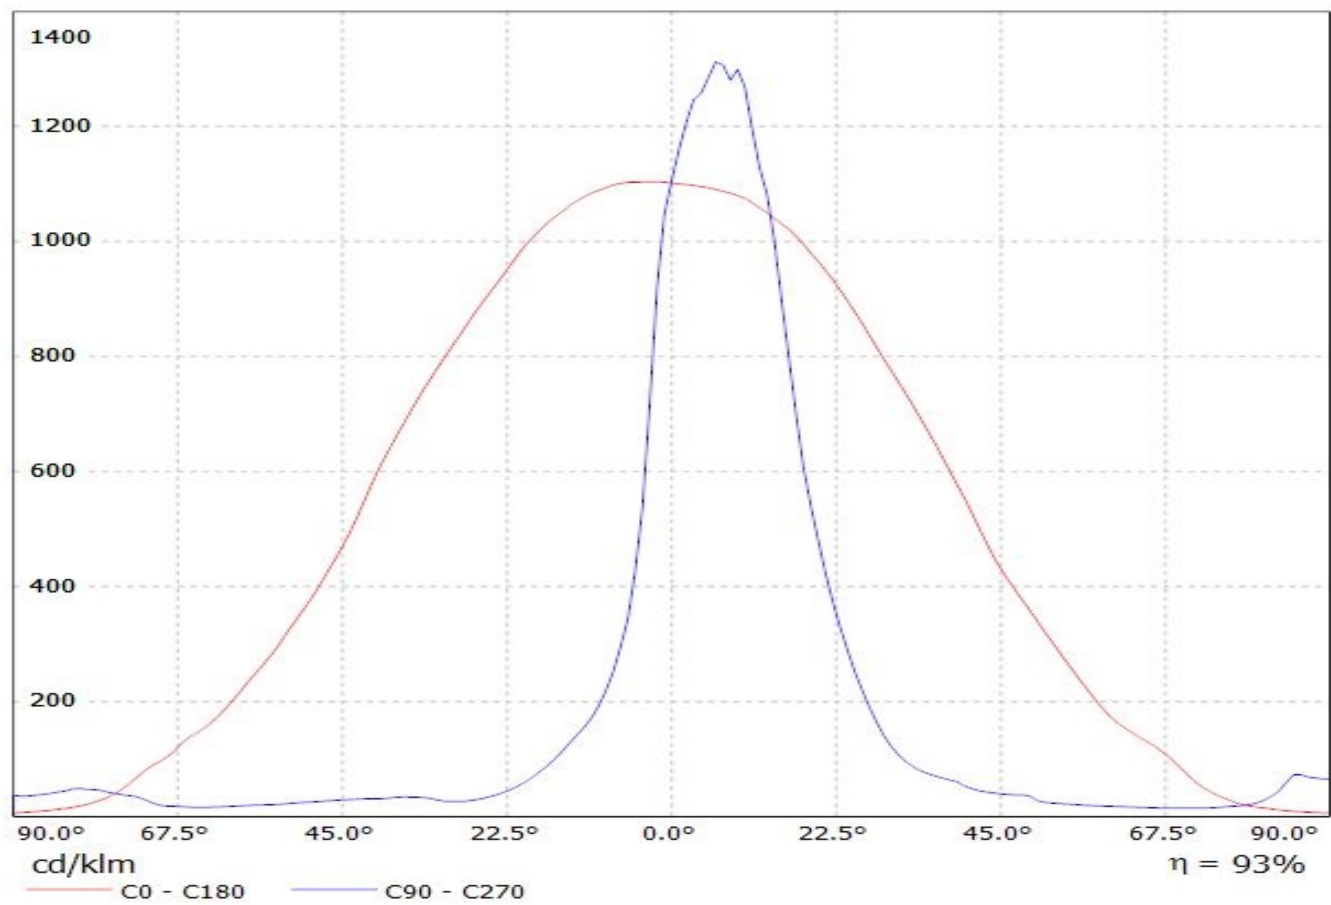


Luminaire: Ledil C14613_FLARE-MAXI-T (MK-R)

Lamps: 1 x Cree_MK-R (MKRAWT-0-27F-G2-B0-H-01)_191.367lm@250mA_CCT=2700K_P=1.4045W_I=0.25A

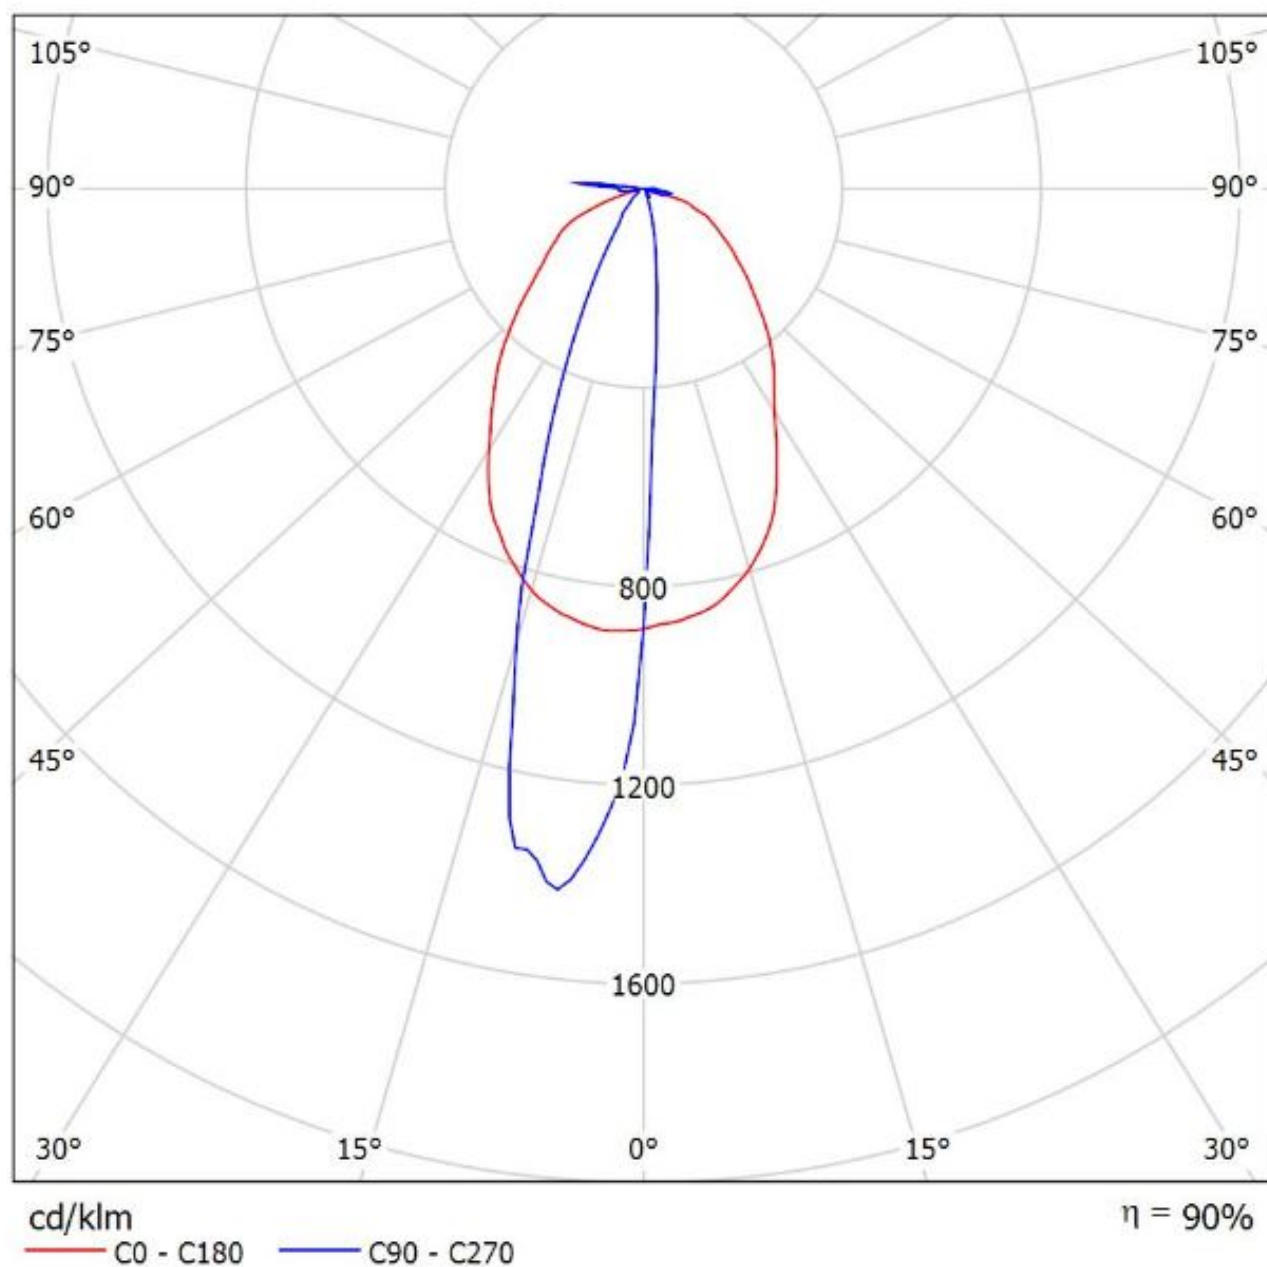

Luminaire: LEDiL Oy C14613_FLARE-MAXI-T_(Luxeon_M)

Lamps: 1 x Philips_Lumileds_Luxeon_M_(LXR7_SW40)_340.894lm@250mA_P=2.72366W_η=0.2499A

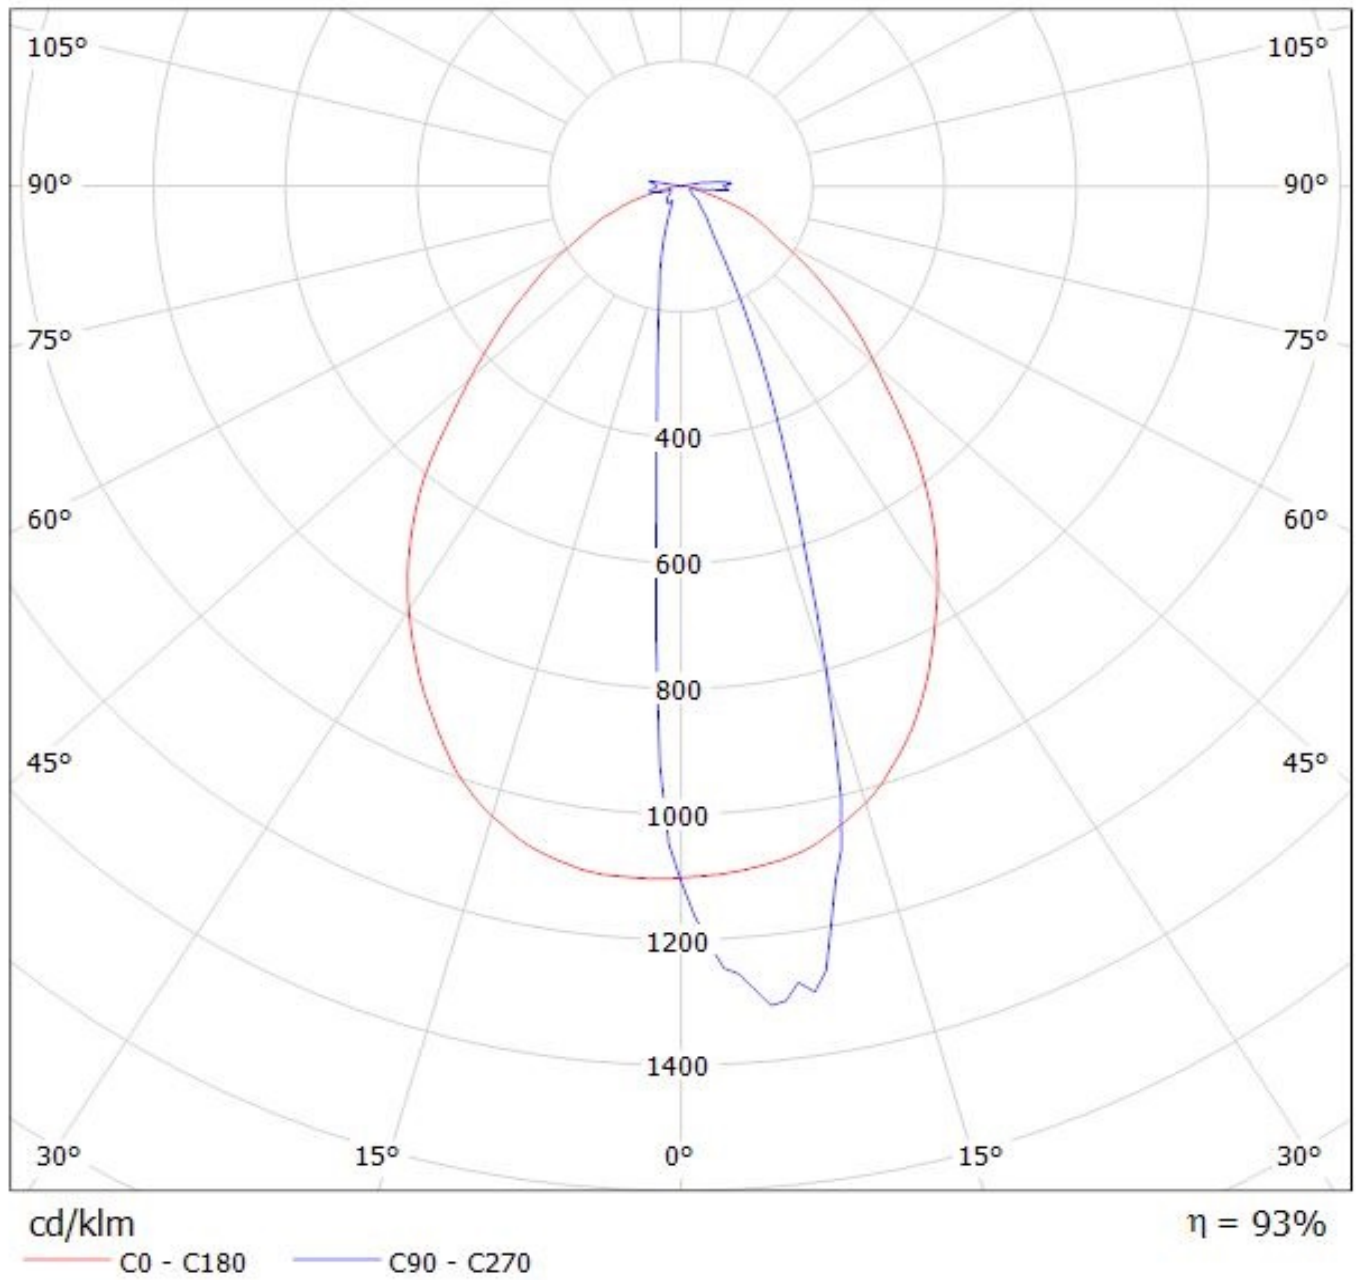

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.