

STRADA-2X2-MEW

Beam with extremely low glare fulfilling EN13201 M-class requirements for wet road surfaces in North Europe

TECHNICAL SPECIFICATIONS:

Dimensions	50.0 mm
Height	10.2 mm
Fastening	screw
ROHS compliant	yes ⓘ


MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
STRADA-2X2-MEW	Multi-lens	PMMA	clear	

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C15594_STRADA-2X2-MEW » Box size: 480 x 280 x 300 mm	800	160	160	9.6





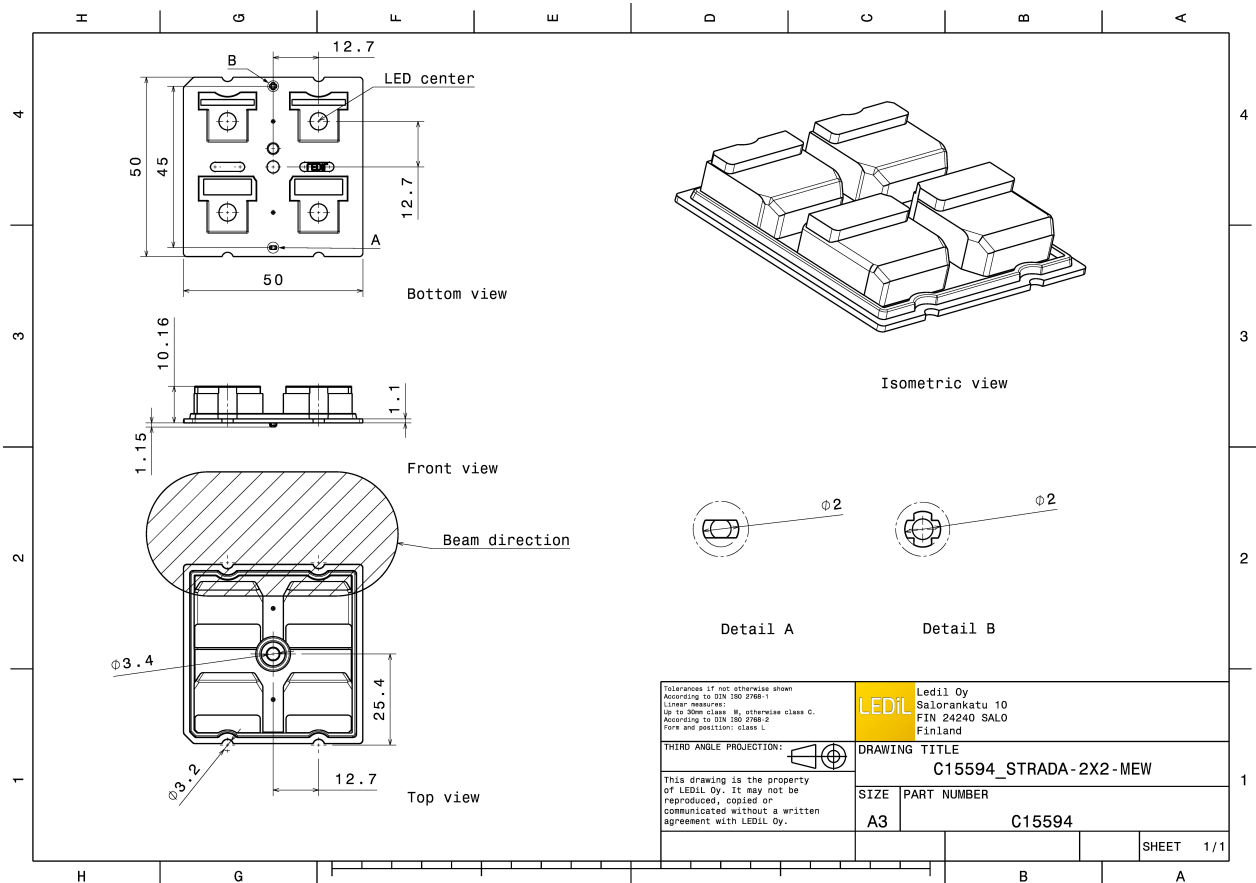


PHOTOMETRIC DATA (MEASURED):




LED XD16
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour White
Required components:

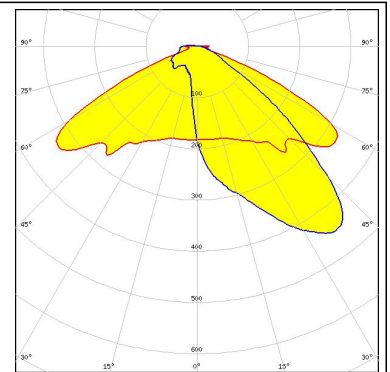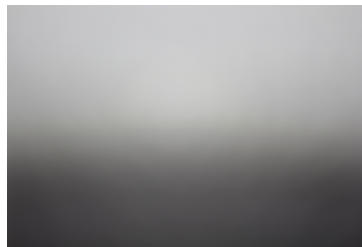

LED XD16
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

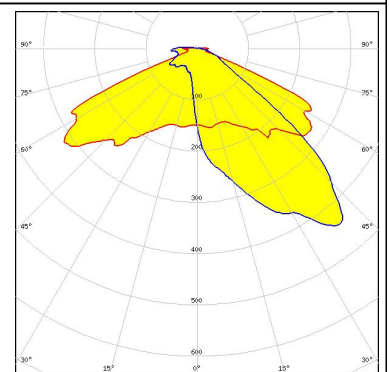


LED XP-G2
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

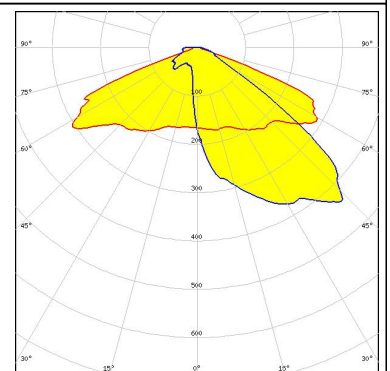

LED XP-G3
FWHM Asymmetric
Efficiency 86 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:


Transparent protective cover

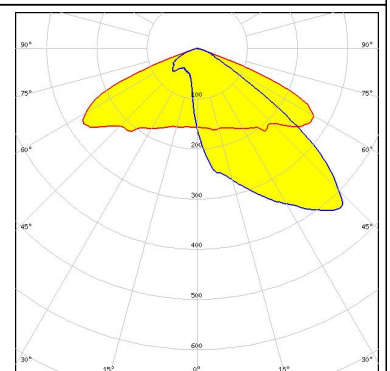


PHOTOMETRIC DATA (MEASURED):




LED XP-L HI
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

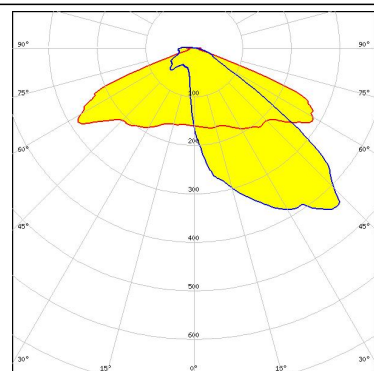



LED LUXEON 5050 Round LES
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

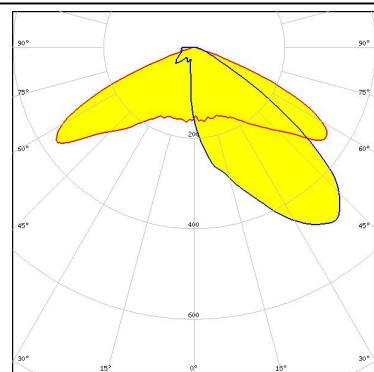

LED LUXEON TX
FWHM Asymmetric
Efficiency 92 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

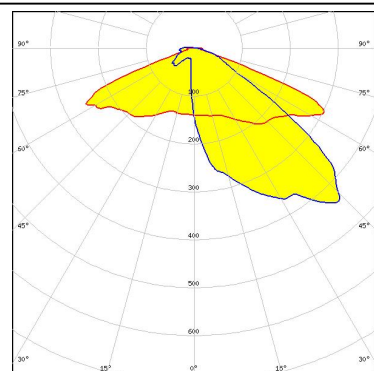


LED LUXEON V
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

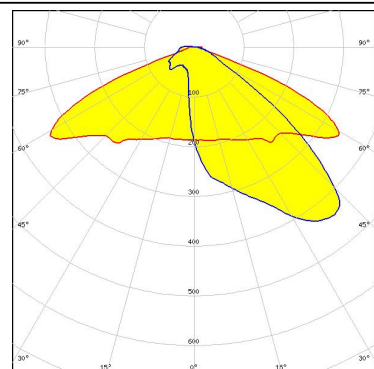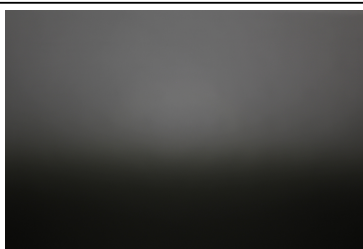


PHOTOMETRIC DATA (MEASURED):




LED NVSW219D
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

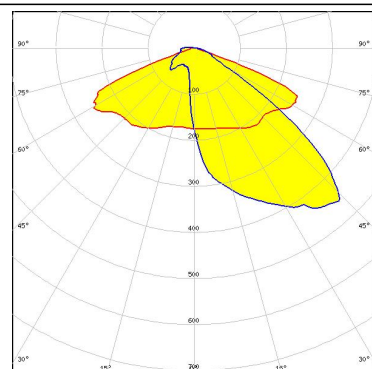

LED NVSW219F
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

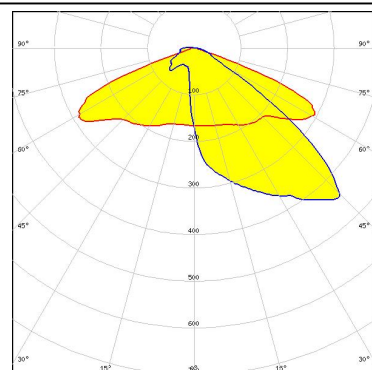

LED NVSW319B
FWHM Asymmetric
Efficiency 96 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

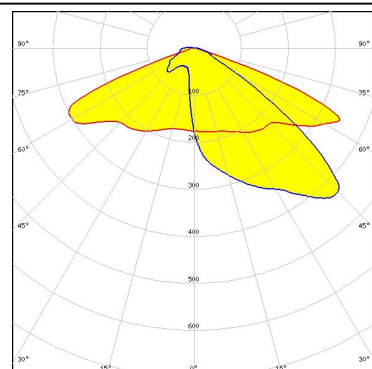

OSRAM

LED PrevaLED Brick HP 2x8
FWHM Asymmetric
Efficiency 87 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

PHOTOMETRIC DATA (MEASURED):

OSRAM

OSRAM Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3

FWHM Asymmetric

Efficiency 87 %


Peak intensity 1 cd/lm

LEDs/each optic 1

Light colour White

Required components:

Transparent protective cover

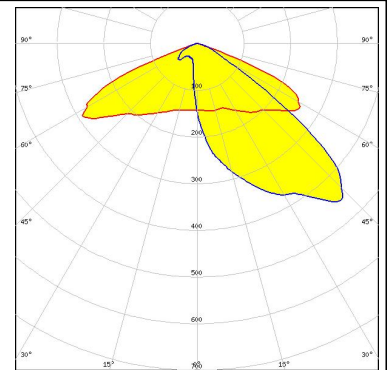

OSRAM

OSRAM Opto Semiconductors

LED OSLON Square PC

FWHM Asymmetric


Efficiency 94 %

Peak intensity 1.1 cd/lm

LEDs/each optic 1

Light colour White

Required components:

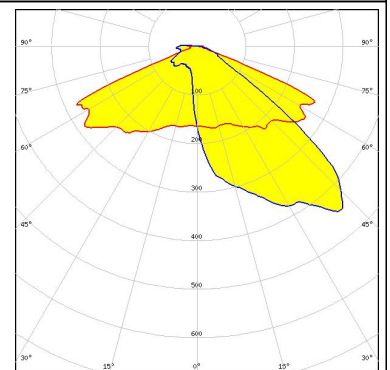

PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4

FWHM Asymmetric


Efficiency 94 %

Peak intensity 1.1 cd/lm

LEDs/each optic 1

Light colour White

Required components:

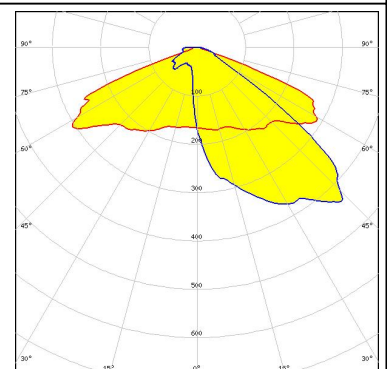

PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+

FWHM Asymmetric


Efficiency 94 %

Peak intensity 1 cd/lm

LEDs/each optic 1

Light colour White


Required components:

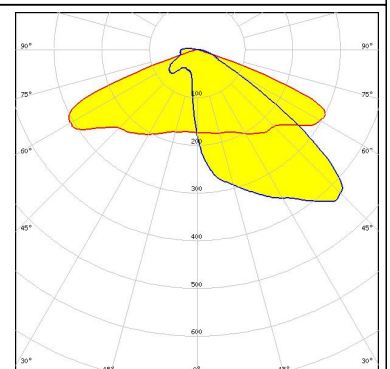

PHOTOMETRIC DATA (MEASURED):


SAMSUNG

LED HiLOM RH16 (LH351C)
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

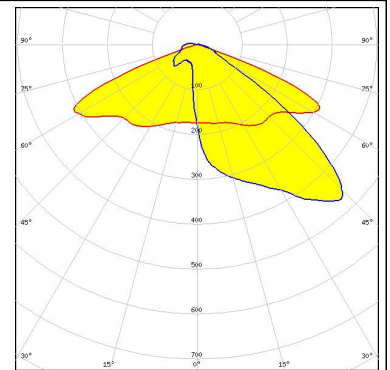


SEOUL SEMICONDUCTOR

LED Z5M3
 FWHM Asymmetric
 Efficiency 96 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

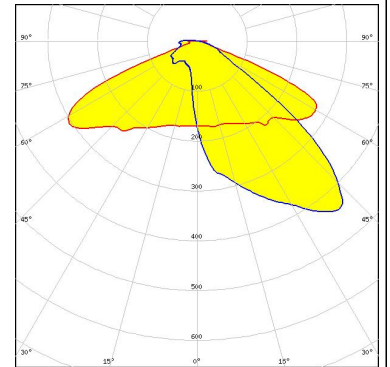



SEOUL SEMICONDUCTOR

LED Z5M4
 FWHM Asymmetric
 Efficiency 97 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

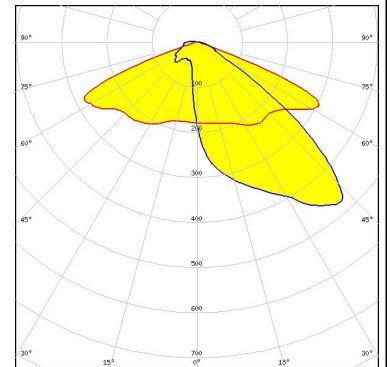

SEOUL SEMICONDUCTOR

LED Z8Y22
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

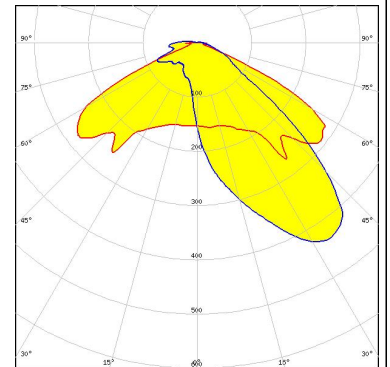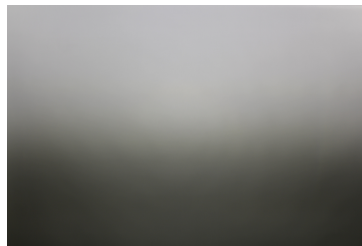


PHOTOMETRIC DATA (MEASURED):

TRIDONIC

LED RLE 2x4 2000lm HP EXC2 OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

TRIDONIC

LED RLE 2x8 4000lm HP EXC2 OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

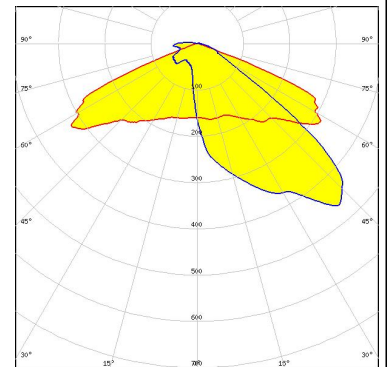

PHOTOMETRIC DATA (SIMULATED):



LED XHP35 HD
FWHM Asymmetric
Efficiency %
LEDs/each optic 1
Light colour White
Required components:




LED XHP35 HI
FWHM Asymmetric
Efficiency %
LEDs/each optic 1
Light colour White
Required components:



LED XM-L2
FWHM Asymmetric
Efficiency 0 %
LEDs/each optic 1
Light colour White
Required components:



LED XP-G2 HE
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

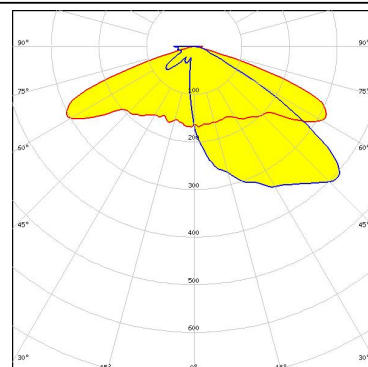


PHOTOMETRIC DATA (SIMULATED):




LED XP-G3
FWHM Asymmetric
Efficiency 81 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Transparent protective cover

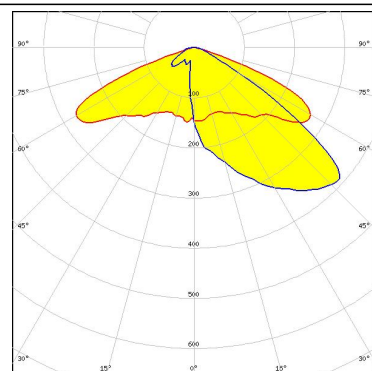


LED XP-L HD
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

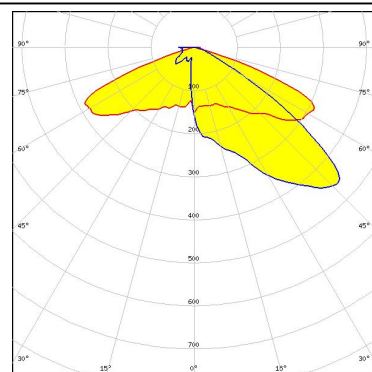

LED XP-L HI
FWHM Asymmetric
Efficiency %
LEDs/each optic 1
Light colour White
Required components:



LED XP-L2
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

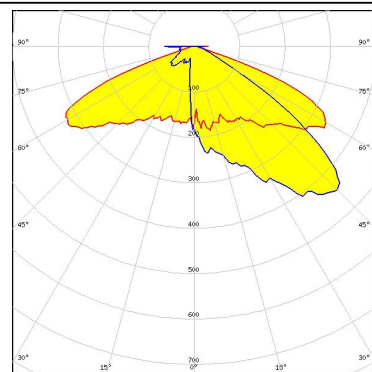

PHOTOMETRIC DATA (SIMULATED):




LED XT-E
FWHM Asymmetric
Efficiency %
LEDs/each optic 1
Light colour White
Required components:



LED LUXEON 5050 Round LES
FWHM Asymmetric
Efficiency 87 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:


Transparent protective cover

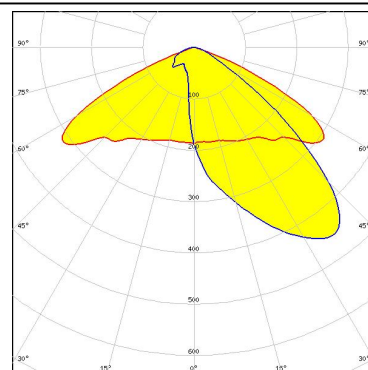

LED NCSxx19B
FWHM Asymmetric
Efficiency 0 %
LEDs/each optic 1
Light colour White
Required components:




LED NV4WB35AM
FWHM Asymmetric
Efficiency 95 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

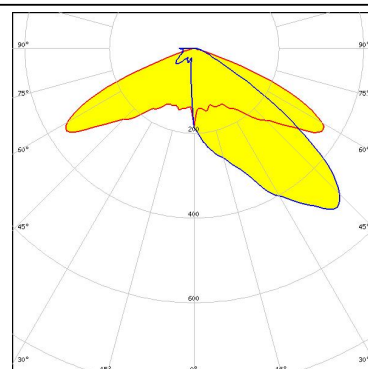

PHOTOMETRIC DATA (SIMULATED):




LED NVSxE21A
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

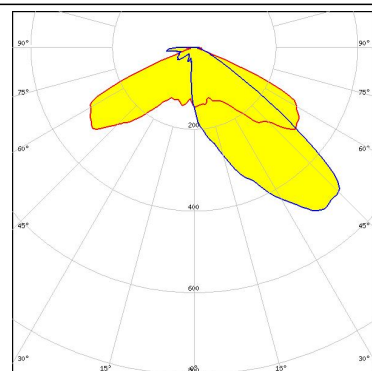


LED NVSxE21A
 FWHM Asymmetric
 Efficiency 86 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Transparent protective cover

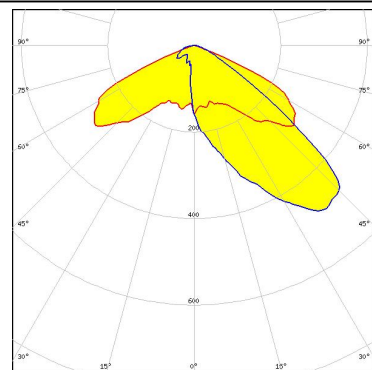

LED NVSxE21A
 FWHM Asymmetric
 Efficiency 82 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Transparent protective cover

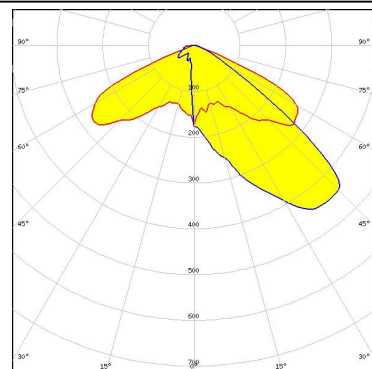


LED NVSxx19B/NVSxx19C
 FWHM Asymmetric
 Efficiency 0 %
 LEDs/each optic 1
 Light colour White
 Required components:

PHOTOMETRIC DATA (SIMULATED):




LED NVSxx19B/NVSxx19C
 FWHM Asymmetric
 Efficiency 83 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Transparent protective cover

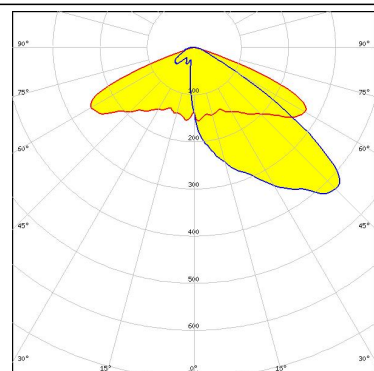

LED Duris S8
 FWHM Asymmetric
 Efficiency 84 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:


Transparent protective cover

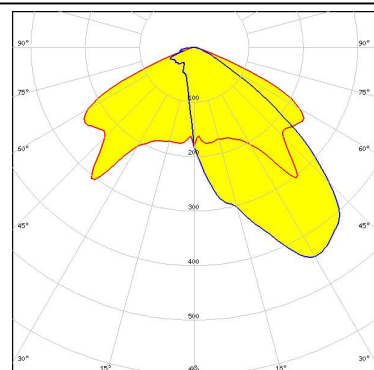

LED Duris S8
 FWHM Asymmetric
 Efficiency %
 LEDs/each optic 1
 Light colour White
 Required components:



LED OSCONIQ P 3737 (2W version)
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

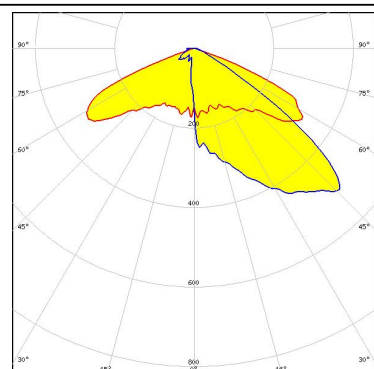


PHOTOMETRIC DATA (SIMULATED):

OSRAM

Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3
FWHM Asymmetric
Efficiency 83 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Transparent protective cover

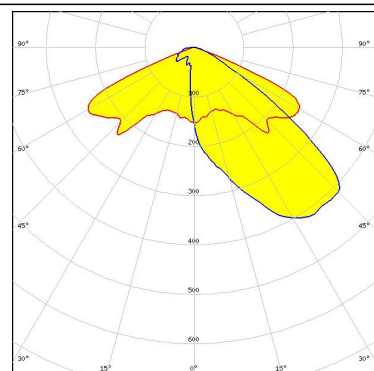


PHILIPS

LED Fortimo FastFlex LED 2x8 DAX G4
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

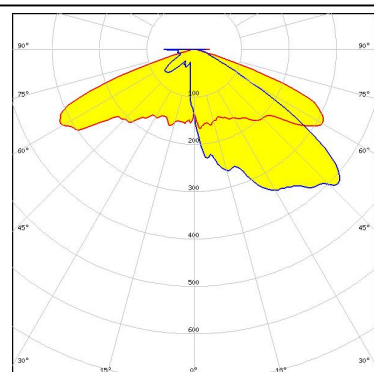

SAMSUNG


LED LH351D
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

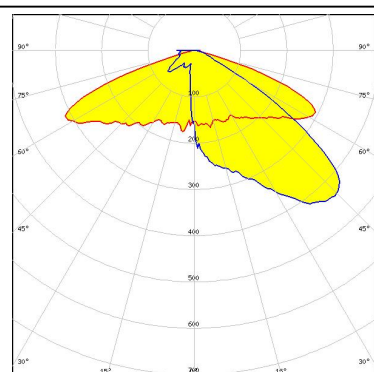

SAMSUNG

LED LH508A
FWHM Asymmetric
Efficiency 85 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Transparent protective cover

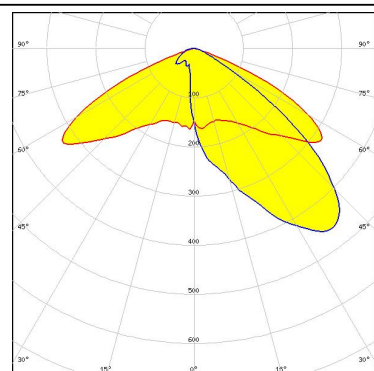


PHOTOMETRIC DATA (SIMULATED):

SAMSUNG


LED LH508B
FWHM Asymmetric
Efficiency 85 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Transparent protective cover

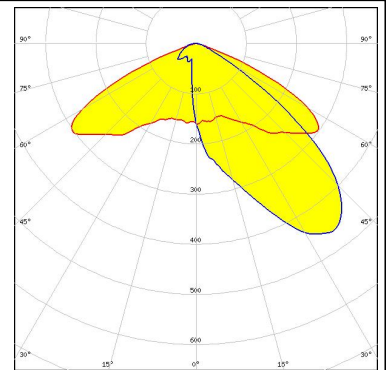

SAMSUNG

LED LH508B
FWHM Asymmetric
Efficiency 95 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

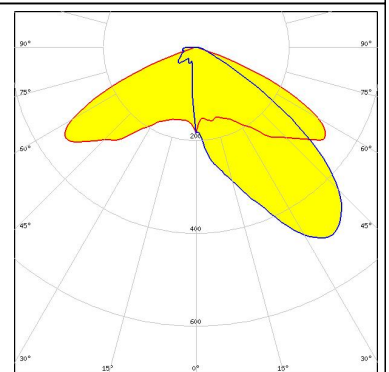

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salu, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)