


Ordering number CP12196_EVA-S

Family	Eva	FWHM	13 degrees
Type	Assembly	Efficiency	94 %
LED	XM-L	cd/lm	-
Color	Black	Gerber File	Available
Diameter	37.7 mm		
Height	17 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Screw, glue		
Status	On production		


Ordering number CA12859_EVA-O

Family	Eva	FWHM	15.5+39 degrees
Type	Assembly	Efficiency	86 %
LED	XM-L	cd/lm	3.300
Color	Black	Gerber File	Available
Diameter	37.7 mm		
Height	17.2 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Tape		
Status	On production		


Ordering number CP12860_EVA-O

Family	Eva	FWHM	15.5+39 degrees
Type	Assembly	Efficiency	86 %
LED	XM-L	cd/lm	3.300
Color	Black	Gerber File	Available
Diameter	37.7 mm		
Height	17 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Screw		
Status	On production		


Ordering number CP12197_EVA-D

Family	Eva	FWHM	20 degrees
Type	Assembly	Efficiency	91 %
LED	XM-L	cd/lm	-
Color	Black	Gerber File	Available
Diameter	37.7 mm		
Height	17 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Screw, glue		
Status	On production		


Ordering number CP12198_EVA-M

Family	Eva	FWHM	24 degrees
Type	Assembly	Efficiency	88 %
LED	XM-L	cd/lm	-
Color	Black	Gerber File	Available
Diameter	37.7 mm		
Height	17 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Screw, glue		
Status	On production		


Ordering number CP12199_EVA-W

Family	Eva	FWHM	40 degrees
Type	Assembly	Efficiency	79 %
LED	XM-L	cd/lm	-
Color	Black	Gerber File	Available
Diameter	37.7 mm		
Height	17 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Screw, glue		
Status	On production		


Ordering number CP12200_EVA-WW

Family	Eva	FWHM	64 degrees
Type	Assembly	Efficiency	77 %
LED	XM-L	cd/lm	-
Color	Black	Gerber File	Available
Diameter	37.7 mm		
Height	17 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Screw, glue		
Status	On production		

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.



PRODUCT DATASHEET

Eva series

last update 20/12/2012

GENERAL INFORMATION

- Product series especially designed & optimized for XM-L series of LEDs.
- Special care taken to make light distribution as uniform as possible.
- Lens material optical grade PMMA with high UV and temperature resistance. Allows use of high current and temperature conditions.


Please find more information about used material from below:

http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%20N%20UL94_Yellow%20Card.pdf


<http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%20N%20PLEXIGLAS-Datasheet.pdf>

- Optic holder molded by high quality PC material (120 degrees of Celcius / 248 degrees of Fahrenheit).


Luminaire: LEDIL OY CA12859_EVA-O / CP12860_EVA-O (XM-L) Efficiency=86%
Lamps: 1 x Cree XM-L (111lm @ 250mA)

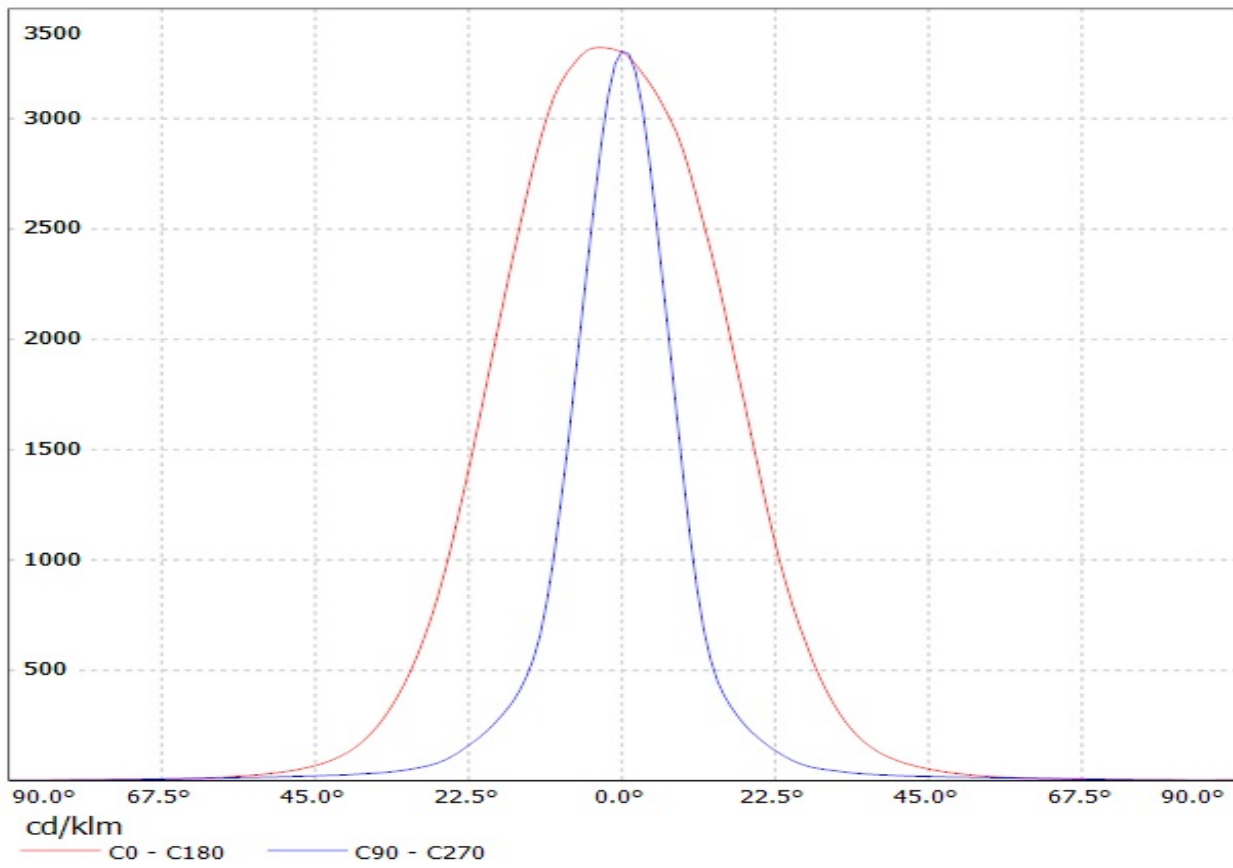

Luminaire: LEDIL OY CA12859_EVA-O / CP12860_EVA-O (XM-L) Efficiency=86%
Lamps: 1 x Cree XM-L (111lm @ 250mA)

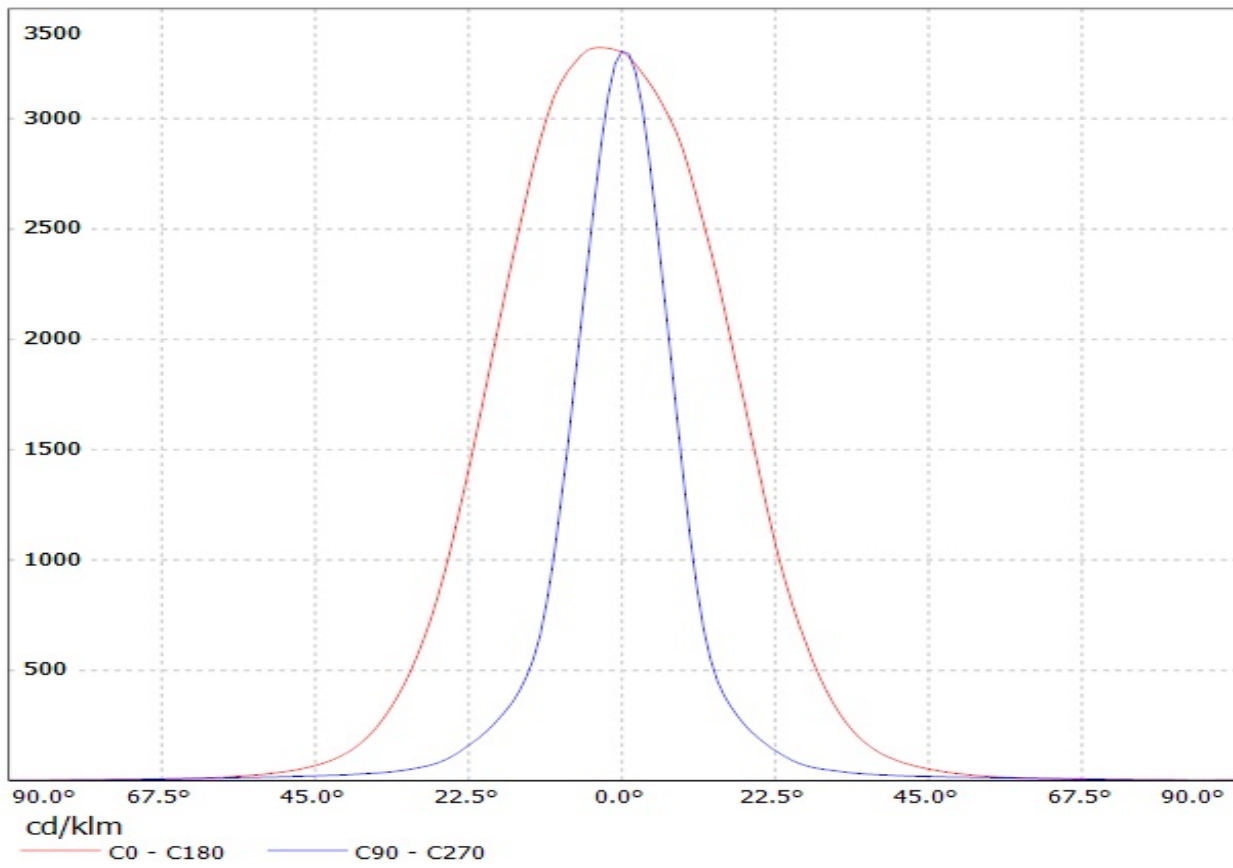

Luminaire: LEDIL OY CA12859_EVA-O / CP12860_EVA-O (XM-L) Efficiency=86%
Lamps: 1 x Cree XM-L (1111lm @ 250mA)

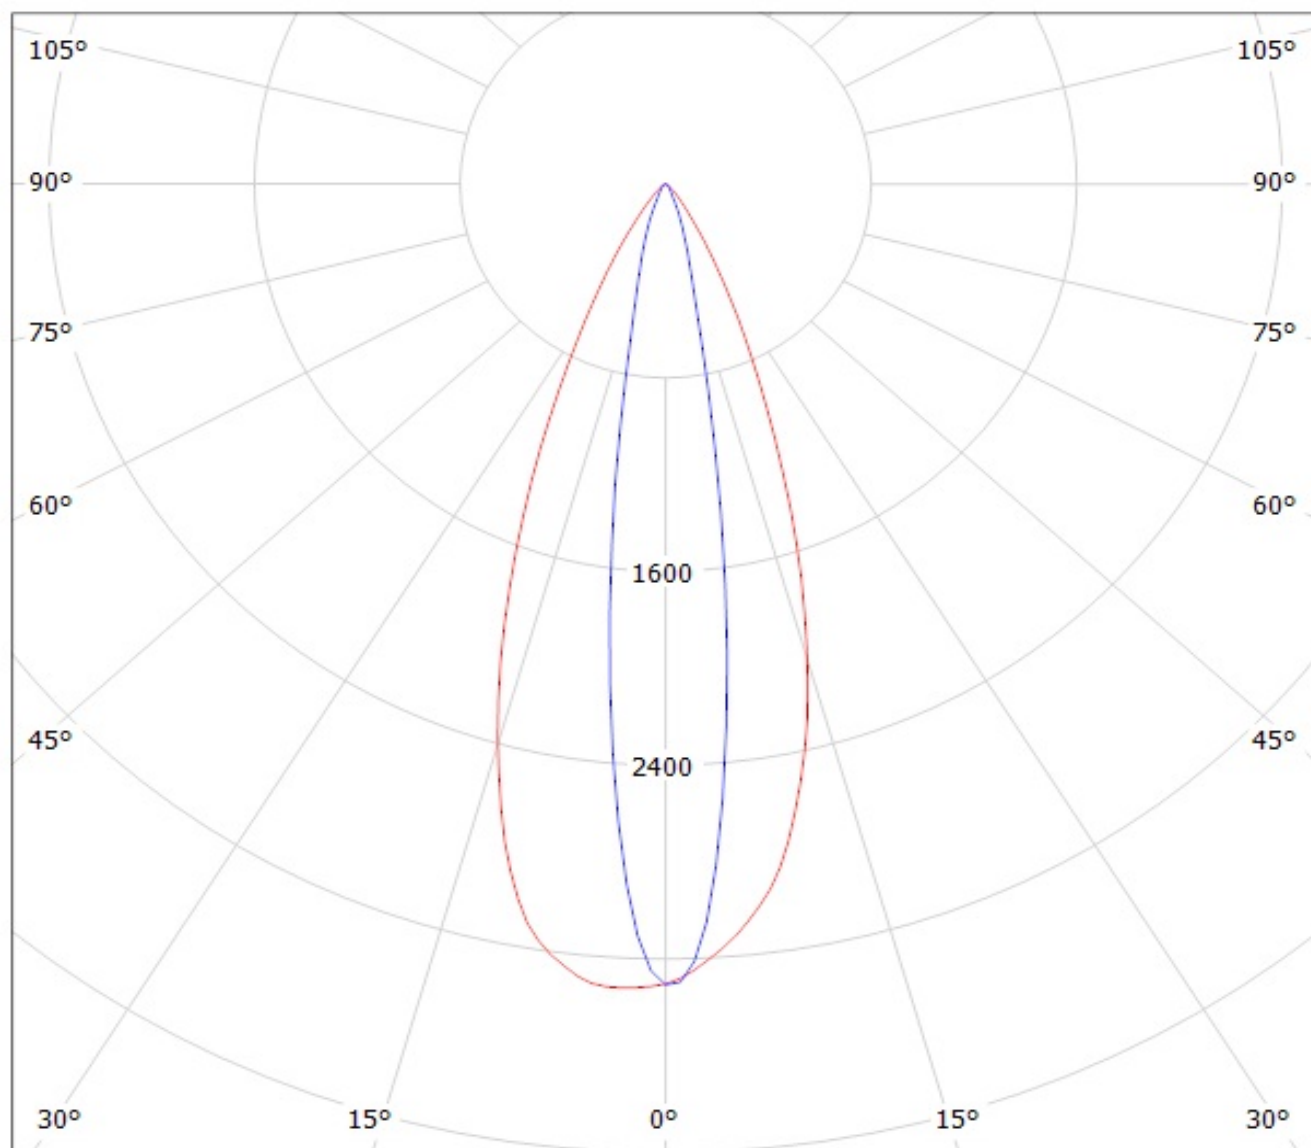


cd/klm

— C0 - C180

— C90 - C270

Luminaire: LEDIL OY CA12859_EVA-O / CP12860_EVA-O (XM-L) Efficiency=86%
Lamps: 1 x Cree XM-L (1111lm @ 250mA)

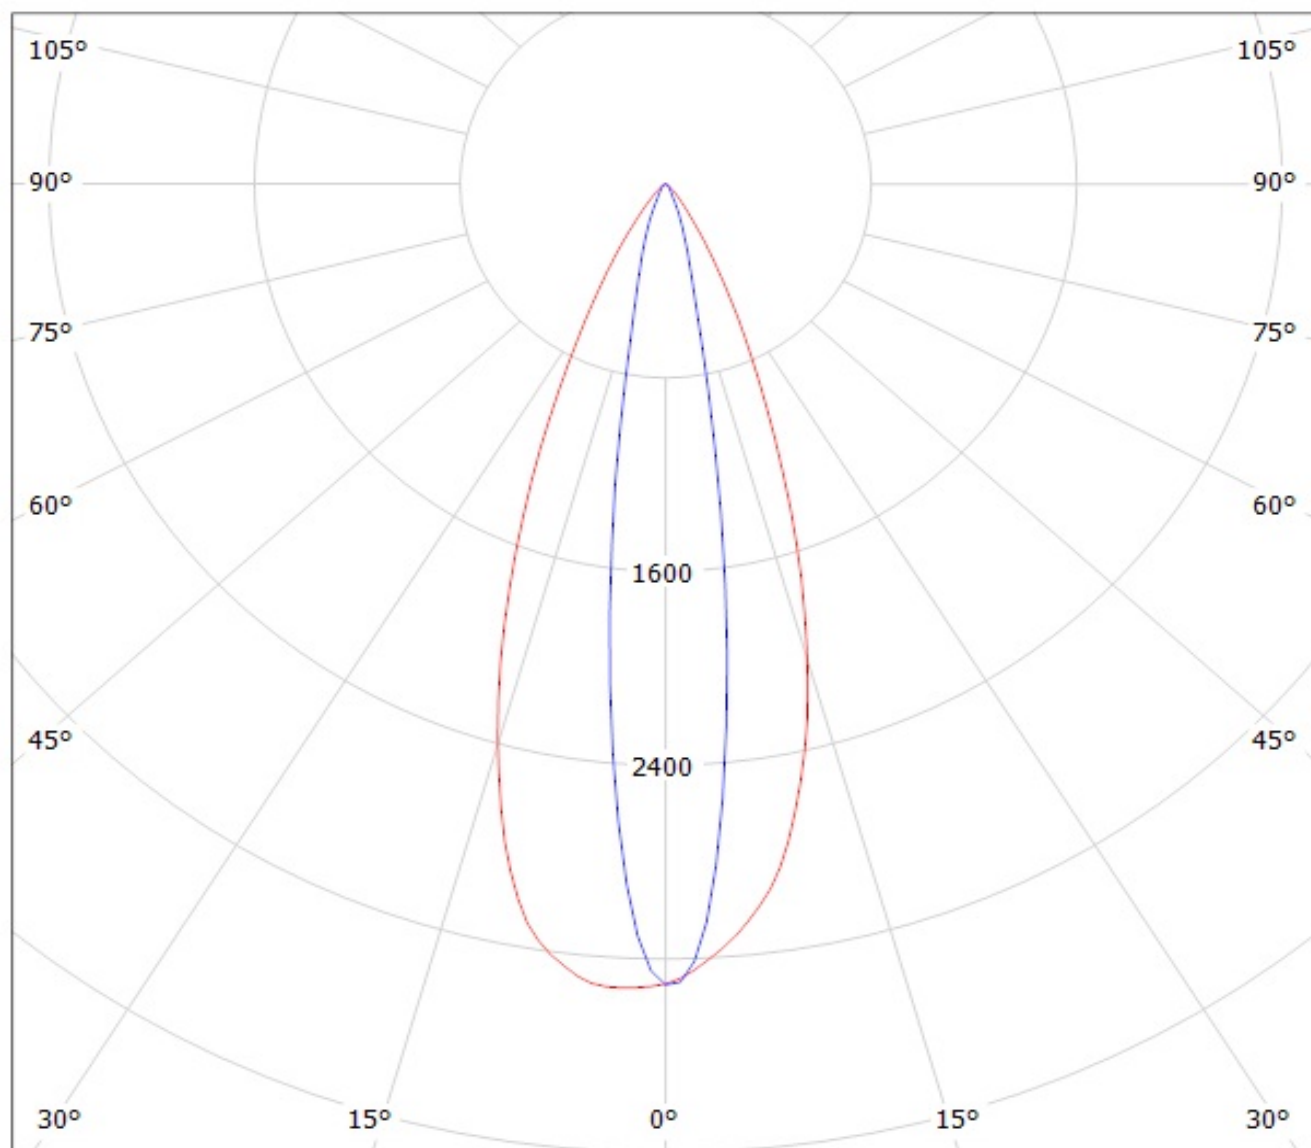

cd/klm

— C0 - C180

— C90 - C270