

Ordering number FP11047_LISA2-RS-PIN

Family	Lisa2	FWHM	16 degrees
Type	Assembly	Efficiency	89 %
LED	Oslon SSL 80	cd/Im	-
Color	Black	Gerber File	Available
Diameter	9.9 mm		
Height	6.6 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Pin, glue		
Status	Ready		

Ordering number FP11001_LISA2-M-PIN

Family	Lisa2	FWHM	23 degrees
Type	Assembly	Efficiency	90 %
LED	Oslon SSL 80	cd/Im	-
Color	Black	Gerber File	Available
Diameter	9.9 mm		
Height	6.6 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Pin, glue		
Status	Ready		

Ordering number FP11002_LISA2-W-PIN

Family	Lisa2	FWHM	36 degrees
Type	Assembly	Efficiency	88 %
LED	Oslon SSL 80	cd/Im	1.730
Color	Black	Gerber File	Available
Diameter	9.9 mm		
Height	6.6 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Pin, glue		
Status	Ready		

Ordering number FP11124_LISA2-O-PIN

Family	Lisa2	FWHM	48+19 degrees
Type	Assembly	Efficiency	80 %
LED	Oslon SSL 80	cd/Im	2.200
Color	Black	Gerber File	Available
Diameter	9.9 mm		
Height	6.6 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Pin, glue		
Status	Ready		

**Ordering number FP11852_LISA2-O-90-PIN**

Family	Lisa2	FWHM	48+19 degrees
Type	Assembly	Efficiency	80 %
LED	Oslon SSL 80	cd/lm	-
Color	Black	Gerber File	Available
Diameter	9.9 mm		
Height	6.6 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Pin, glue		
Status	Ready		

Ordering number FP11003_LISA2-WW-PIN

Family	Lisa2	FWHM	61 degrees
Type	Assembly	Efficiency	90 %
LED	Oslon SSL 80	cd/lm	-
Color	Black	Gerber File	Available
Diameter	9.9 mm		
Height	7 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Pin, glue		
Status	Ready		

Ordering number FP11957_LISA2-WWW-PIN

Family	Lisa2	FWHM	70 degrees
Type	Assembly	Efficiency	77 %
LED	Oslon SSL 80	cd/lm	0.700
Color	Black	Gerber File	Available
Diameter	9.9 mm		
Height	6.6 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Pin, glue		
Status	Ready		

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.



PRODUCT DATASHEET

Lisa2 series

last update 25/10/2012



GENERAL INFORMATION

- Product series especially designed & optimized for Oslon SSL 80 series of LEDs.
- Special care taken to make light distribution as uniform as possible.
- Lens material optical grade PMMA with high UV and temperature resistance (105 degrees of Celcius / 220 degrees of Fahrenheit). Allows use of high current and temperature conditions.


Please find more information about used material from below:

http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%20N%20UL94_Yellow%20Card.pdf

<http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%20N%20PLEXIGLAS-Datasheet.pdf>

- Optic holder molded by high quality PC material (120 dergees of Celcius / 248 degrees of Fahrenheit).

Relative intensity of FA11957_Lisa2-WWW-Pin-OSL150



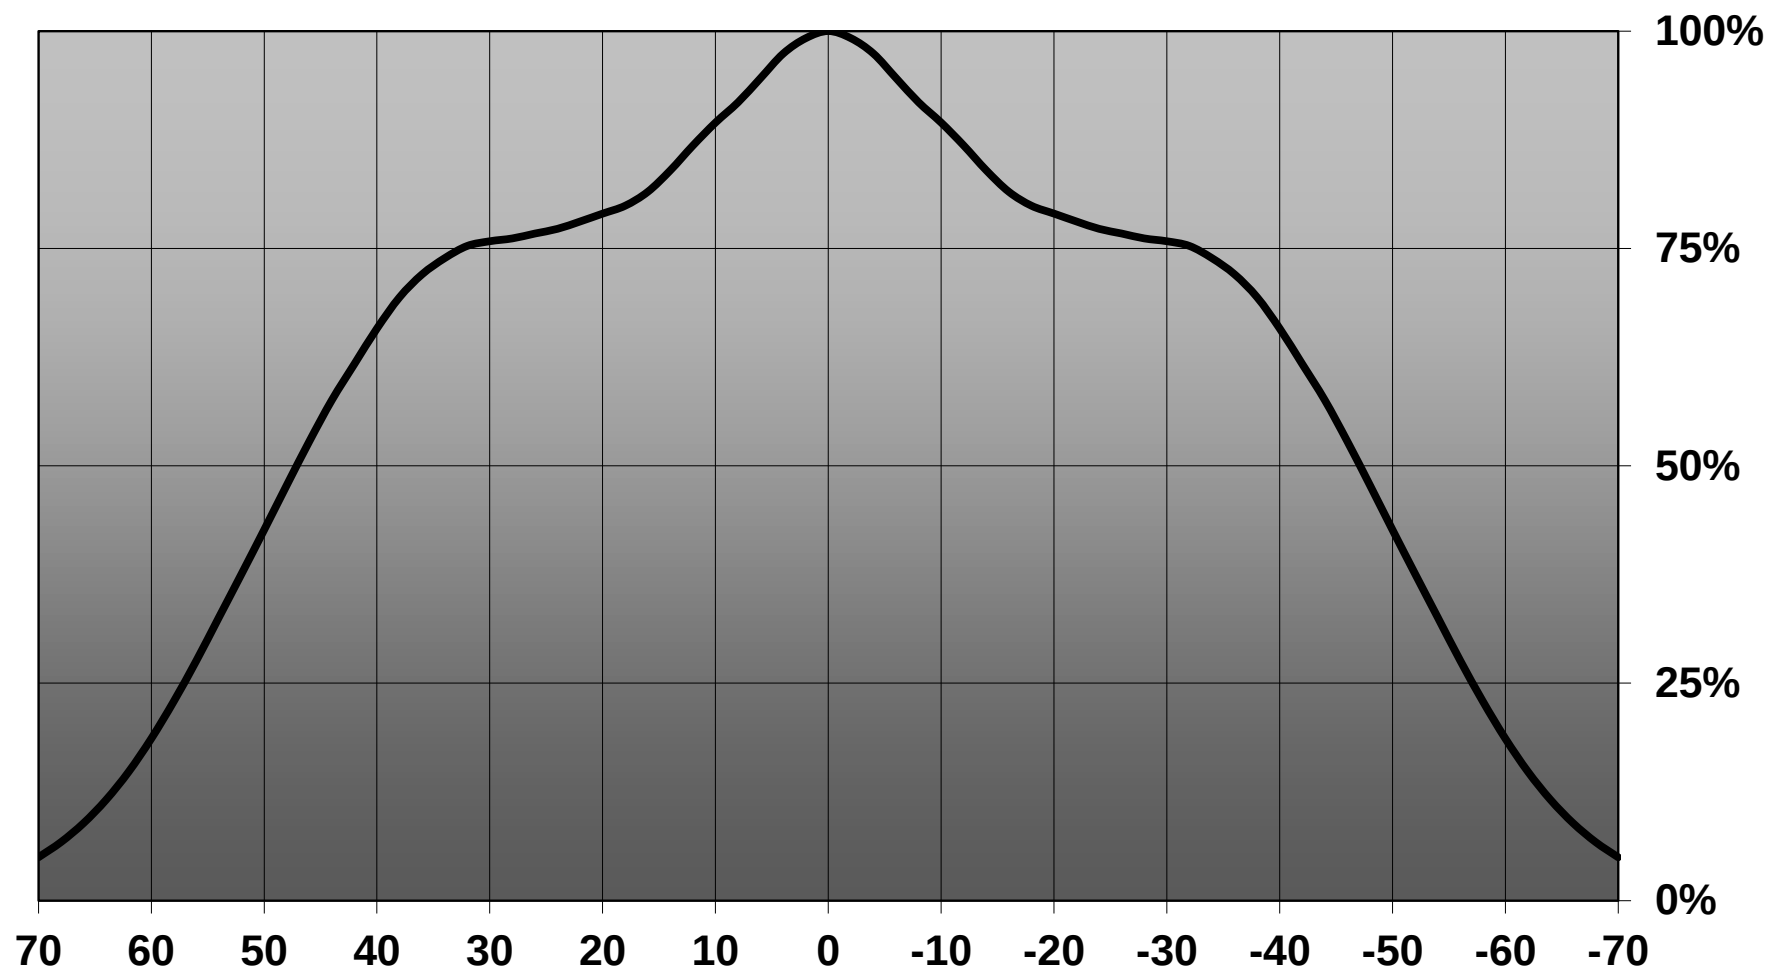


D

C

B

A

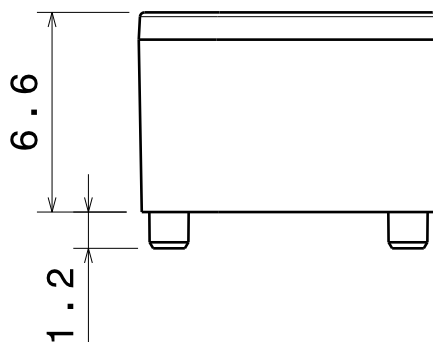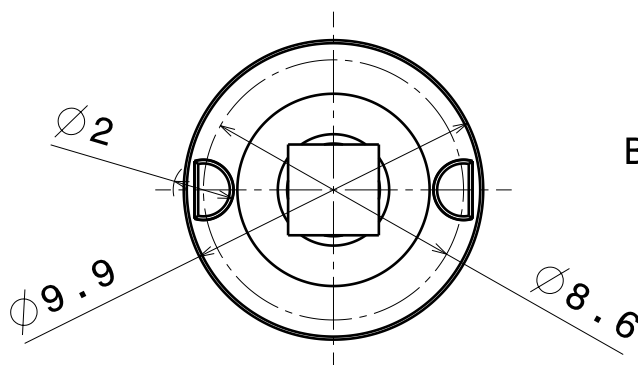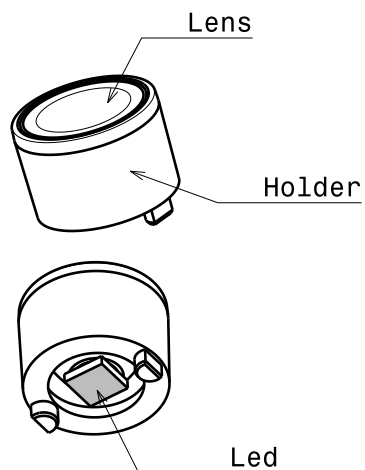

Materials:

Lens PMMA

Holder PC

FA11001_Lisa2-M-Pin-OSL

FA11002_Lisa2-W-Pin-OSL

FA11003_Lisa2-WW-Pin-OSL

FA11047_Lisa2-RS-Pin-OSL

FA11124_Lisa2-O-Pin-OSL

This drawing is our property.
It can't be reproduced
or communicated without
our written agreement.

LEDIL

Ledil Oy
Tehdaskatu 13
FIN-24100 SALO
Finland

DRAWING TITLE

Datasheet Lisa2-OSL series assy

DRAWN BY

pv

DATE

10.11.2009

CHECKED BY

tk

DATE

07.08.2009

DESIGNED BY

hh

DATE

09.08.2009

SIZE

A4

DRAWING NUMBER

REV

0.1

SCALE

4:1

WEIGHT (g)


SHEET

1 / 1


D

A


Luminaire: LEDiL Oy FP11002 & FP11082_LISA2-W_(SSL80) Eff.87.5%
Lamps: 1 x Oslon SSL80 (77.5072lm@250mA)

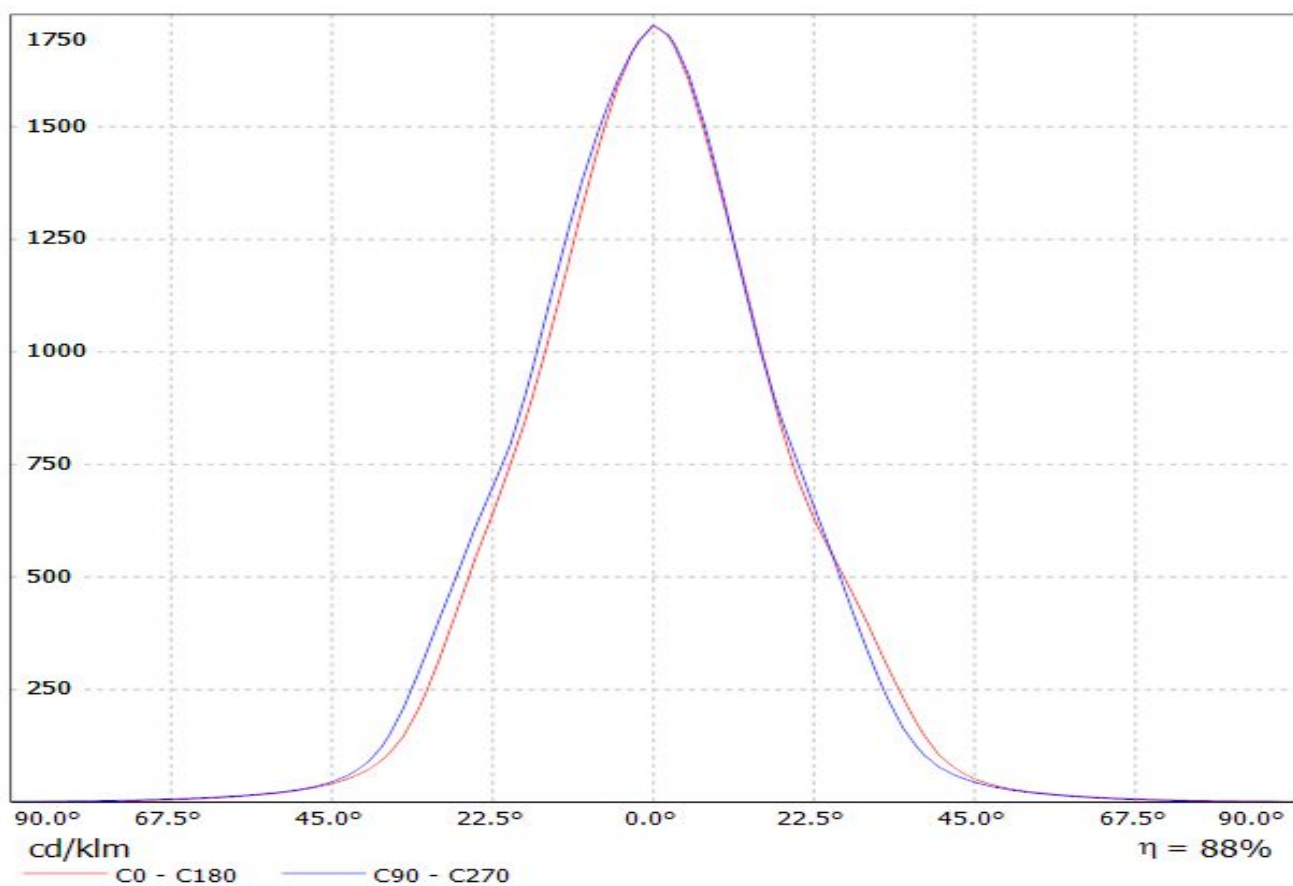


Luminaire: LEDiL Oy FP11124&FP11120_Lisa2-O_(SSL80) Eff.80.4%
Lamps: 1 x Oslon SSL80 (77.5621lm@250mA)

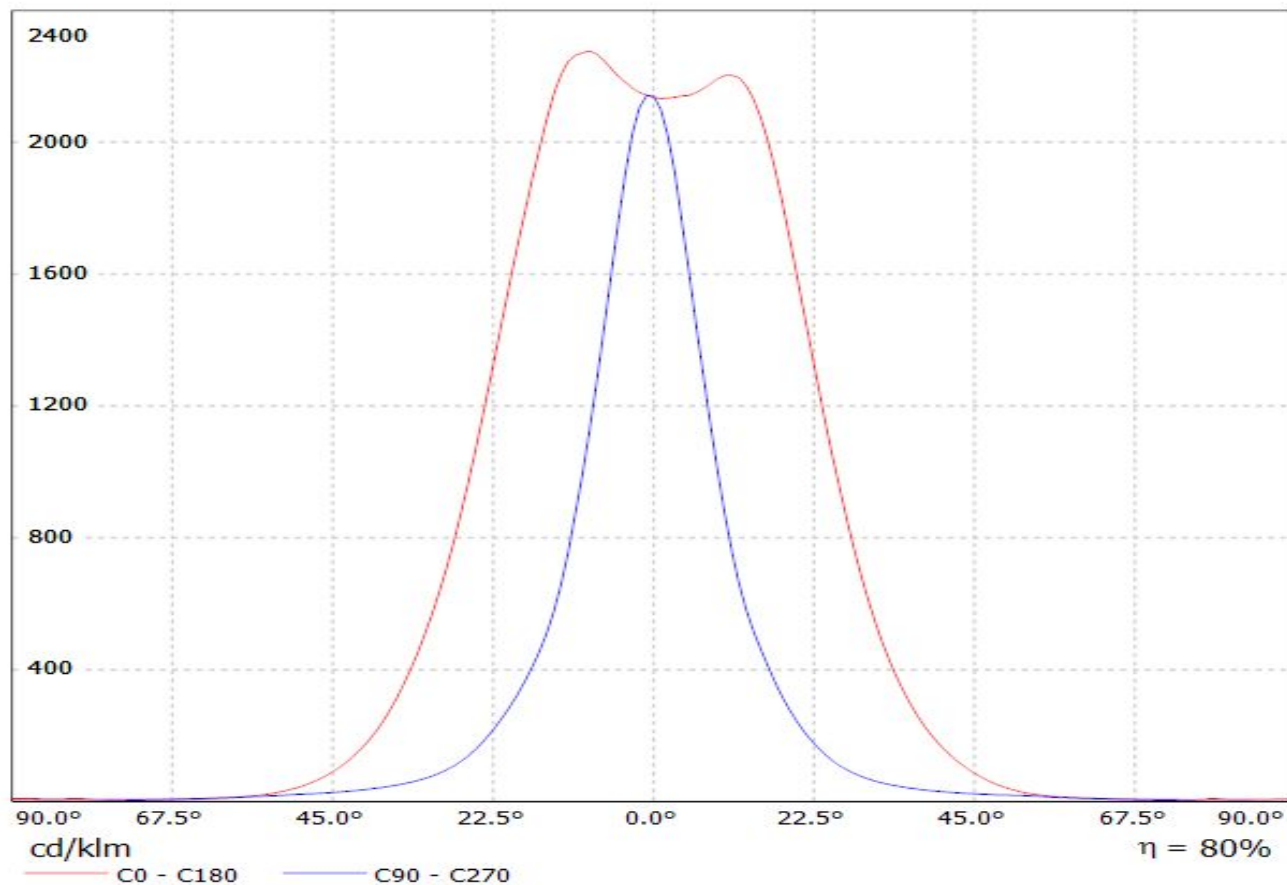


Luminaire: Ledil Oy FP11957 & FP11958_LISA2-WWW (Osram Oslon 80 79lm @ 250mA) Efficiency=74%
Lamps: 1 x Osram Oslon 80 79lm @ 250mA

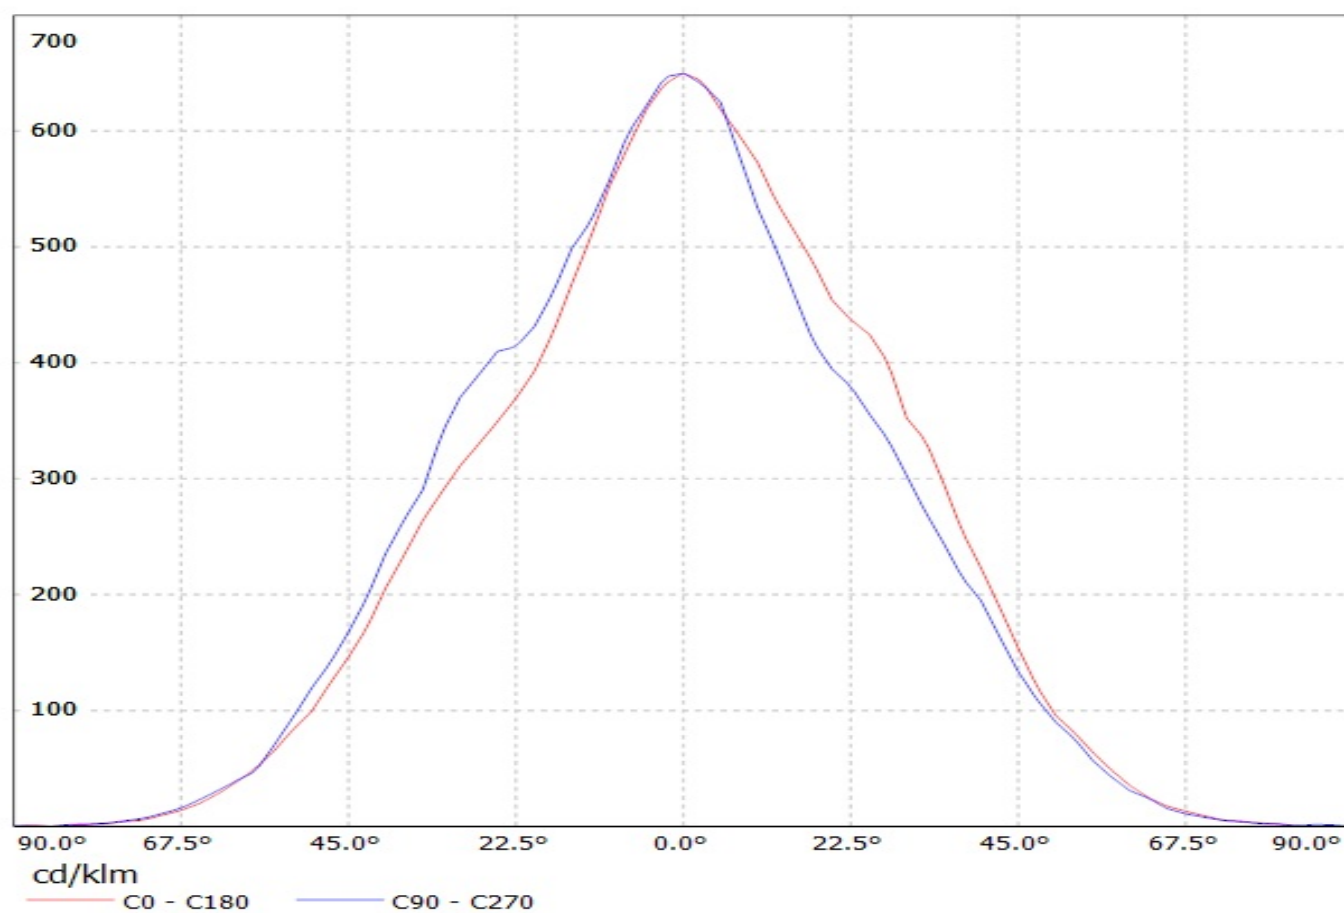


Luminaire: LEDiL Oy FP11002 & FP11082_LISA2-W_(SSL80) Eff.87.5%
Lamps: 1 x Oslon SSL80 (77.5072lm@250mA)

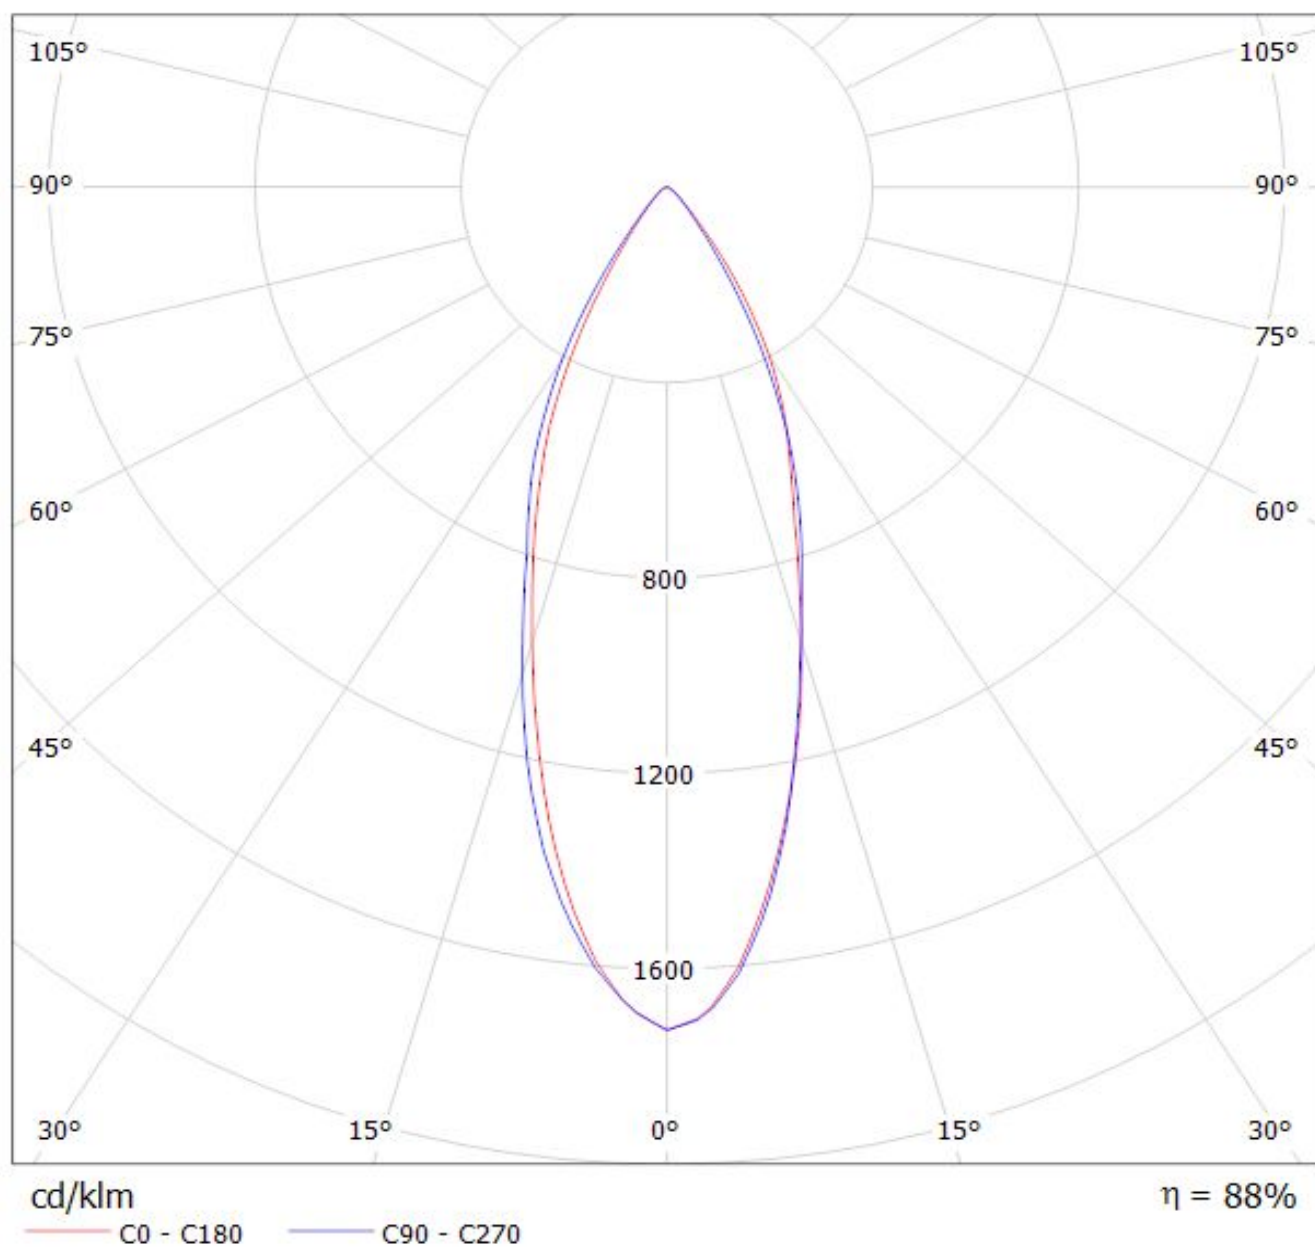

Luminaire: LEDiL Oy FP11124&FP11120_Lisa2-O_(SSL80) Eff.80.4%
Lamps: 1 x Oslon SSL80 (77.5621lm@250mA)

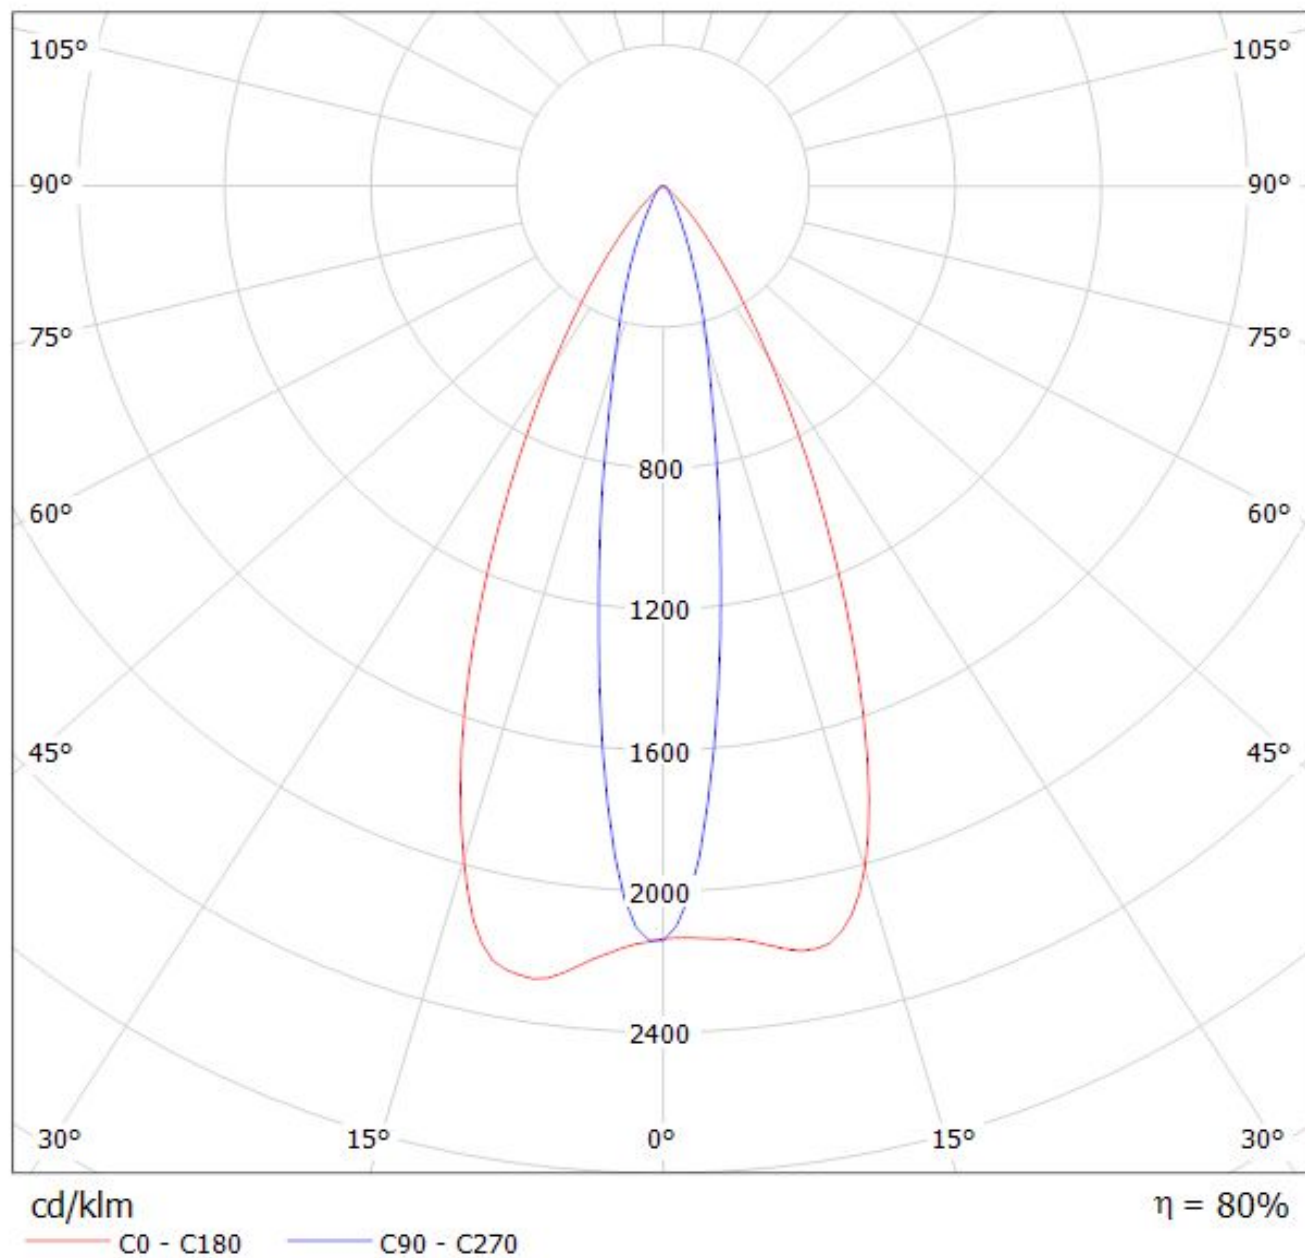

Luminaire: Ledil Oy FP11957 & FP11958_LISA2-WWW (Osram Oslon 80 79lm @ 250mA) Efficiency=74%
Lamps: 1 x Osram Oslon 80 79lm @ 250mA

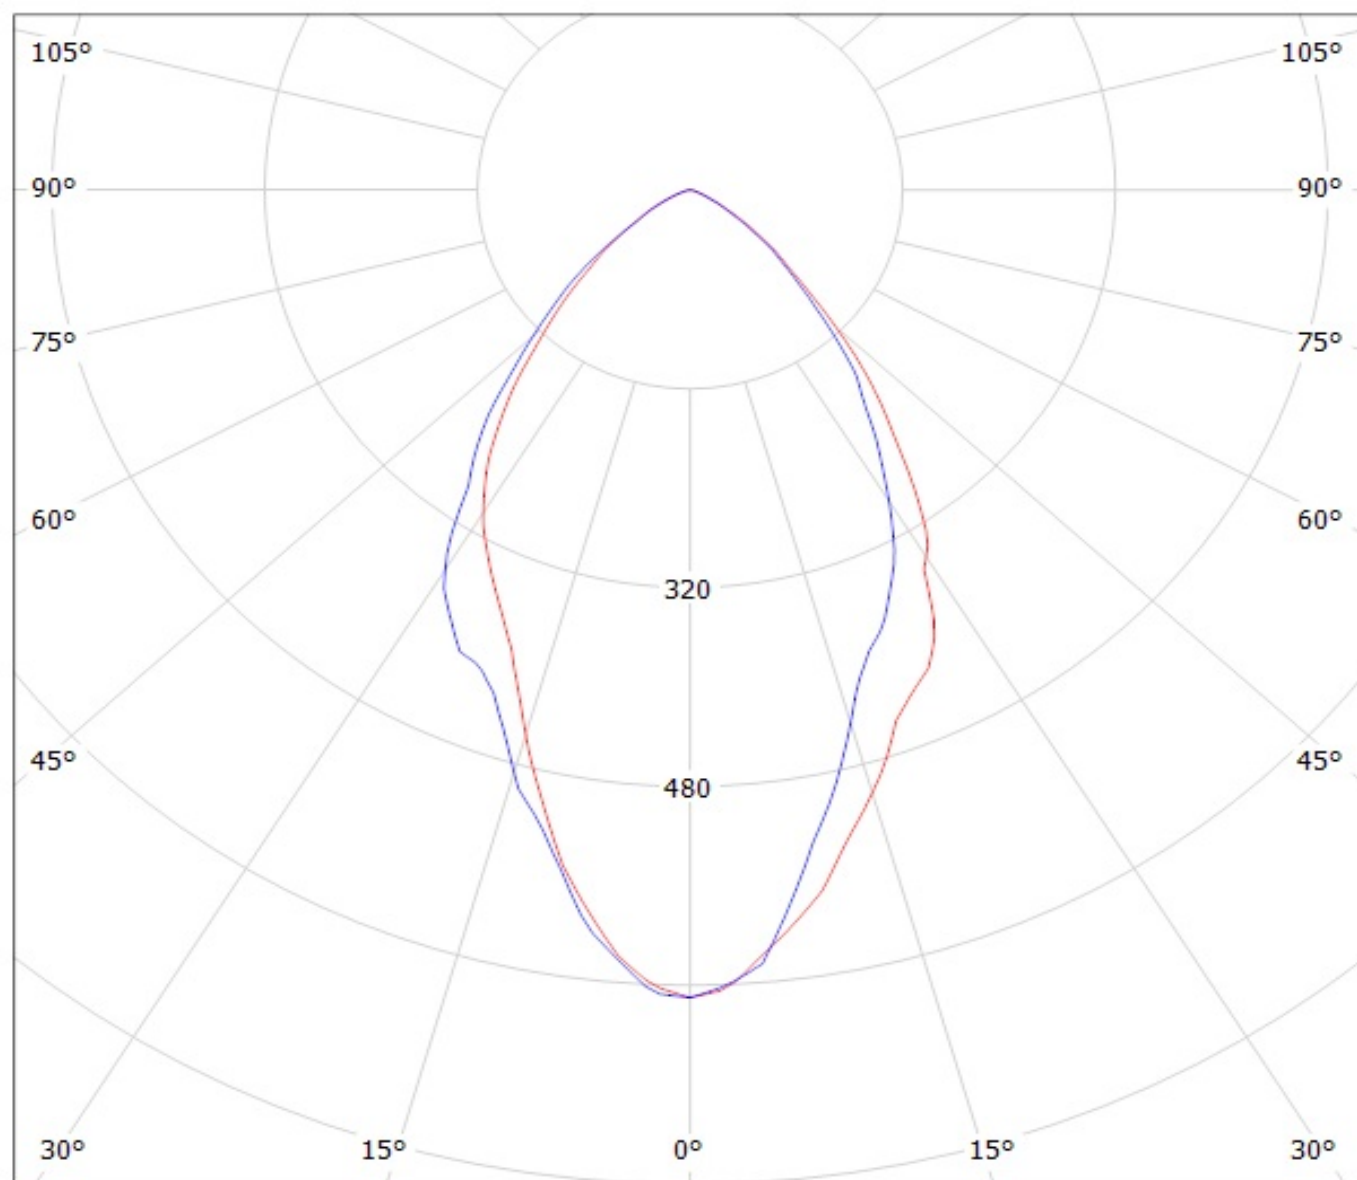

cd/klm

— C0 - C180

— C90 - C270