


DETAILS

Product Number	FP11085_LISA2-RS-CLIP
Family	Lisa2
Type	Assembly
Color	black
Diameter	9,9 mm
Height	6,8 mm
Style	round
Optic Material	PMMA
Holder Material	PC
Fastening	clips, glue
Status	ready
ROHS Compliant	Yes
Date Updated	18/08/2014



OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Effi- ciency	cd/lm	Connector
XQ-E	sim: 14.5	Real spot	sim: 91 %	sim: 10.100-	
XQ-E HI	sim: 11	Real spot	sim: 86 %	sim: 14.000-	
LUXEON Z ES	15 deg	Real spot	84 %	6.600	-
XP-E	16 deg	Real spot	90 %	-	-
Double Dome (GM2BB)	18 deg	Real spot	-	-	-
XP-G	26 deg	Real spot	90 %	-	-

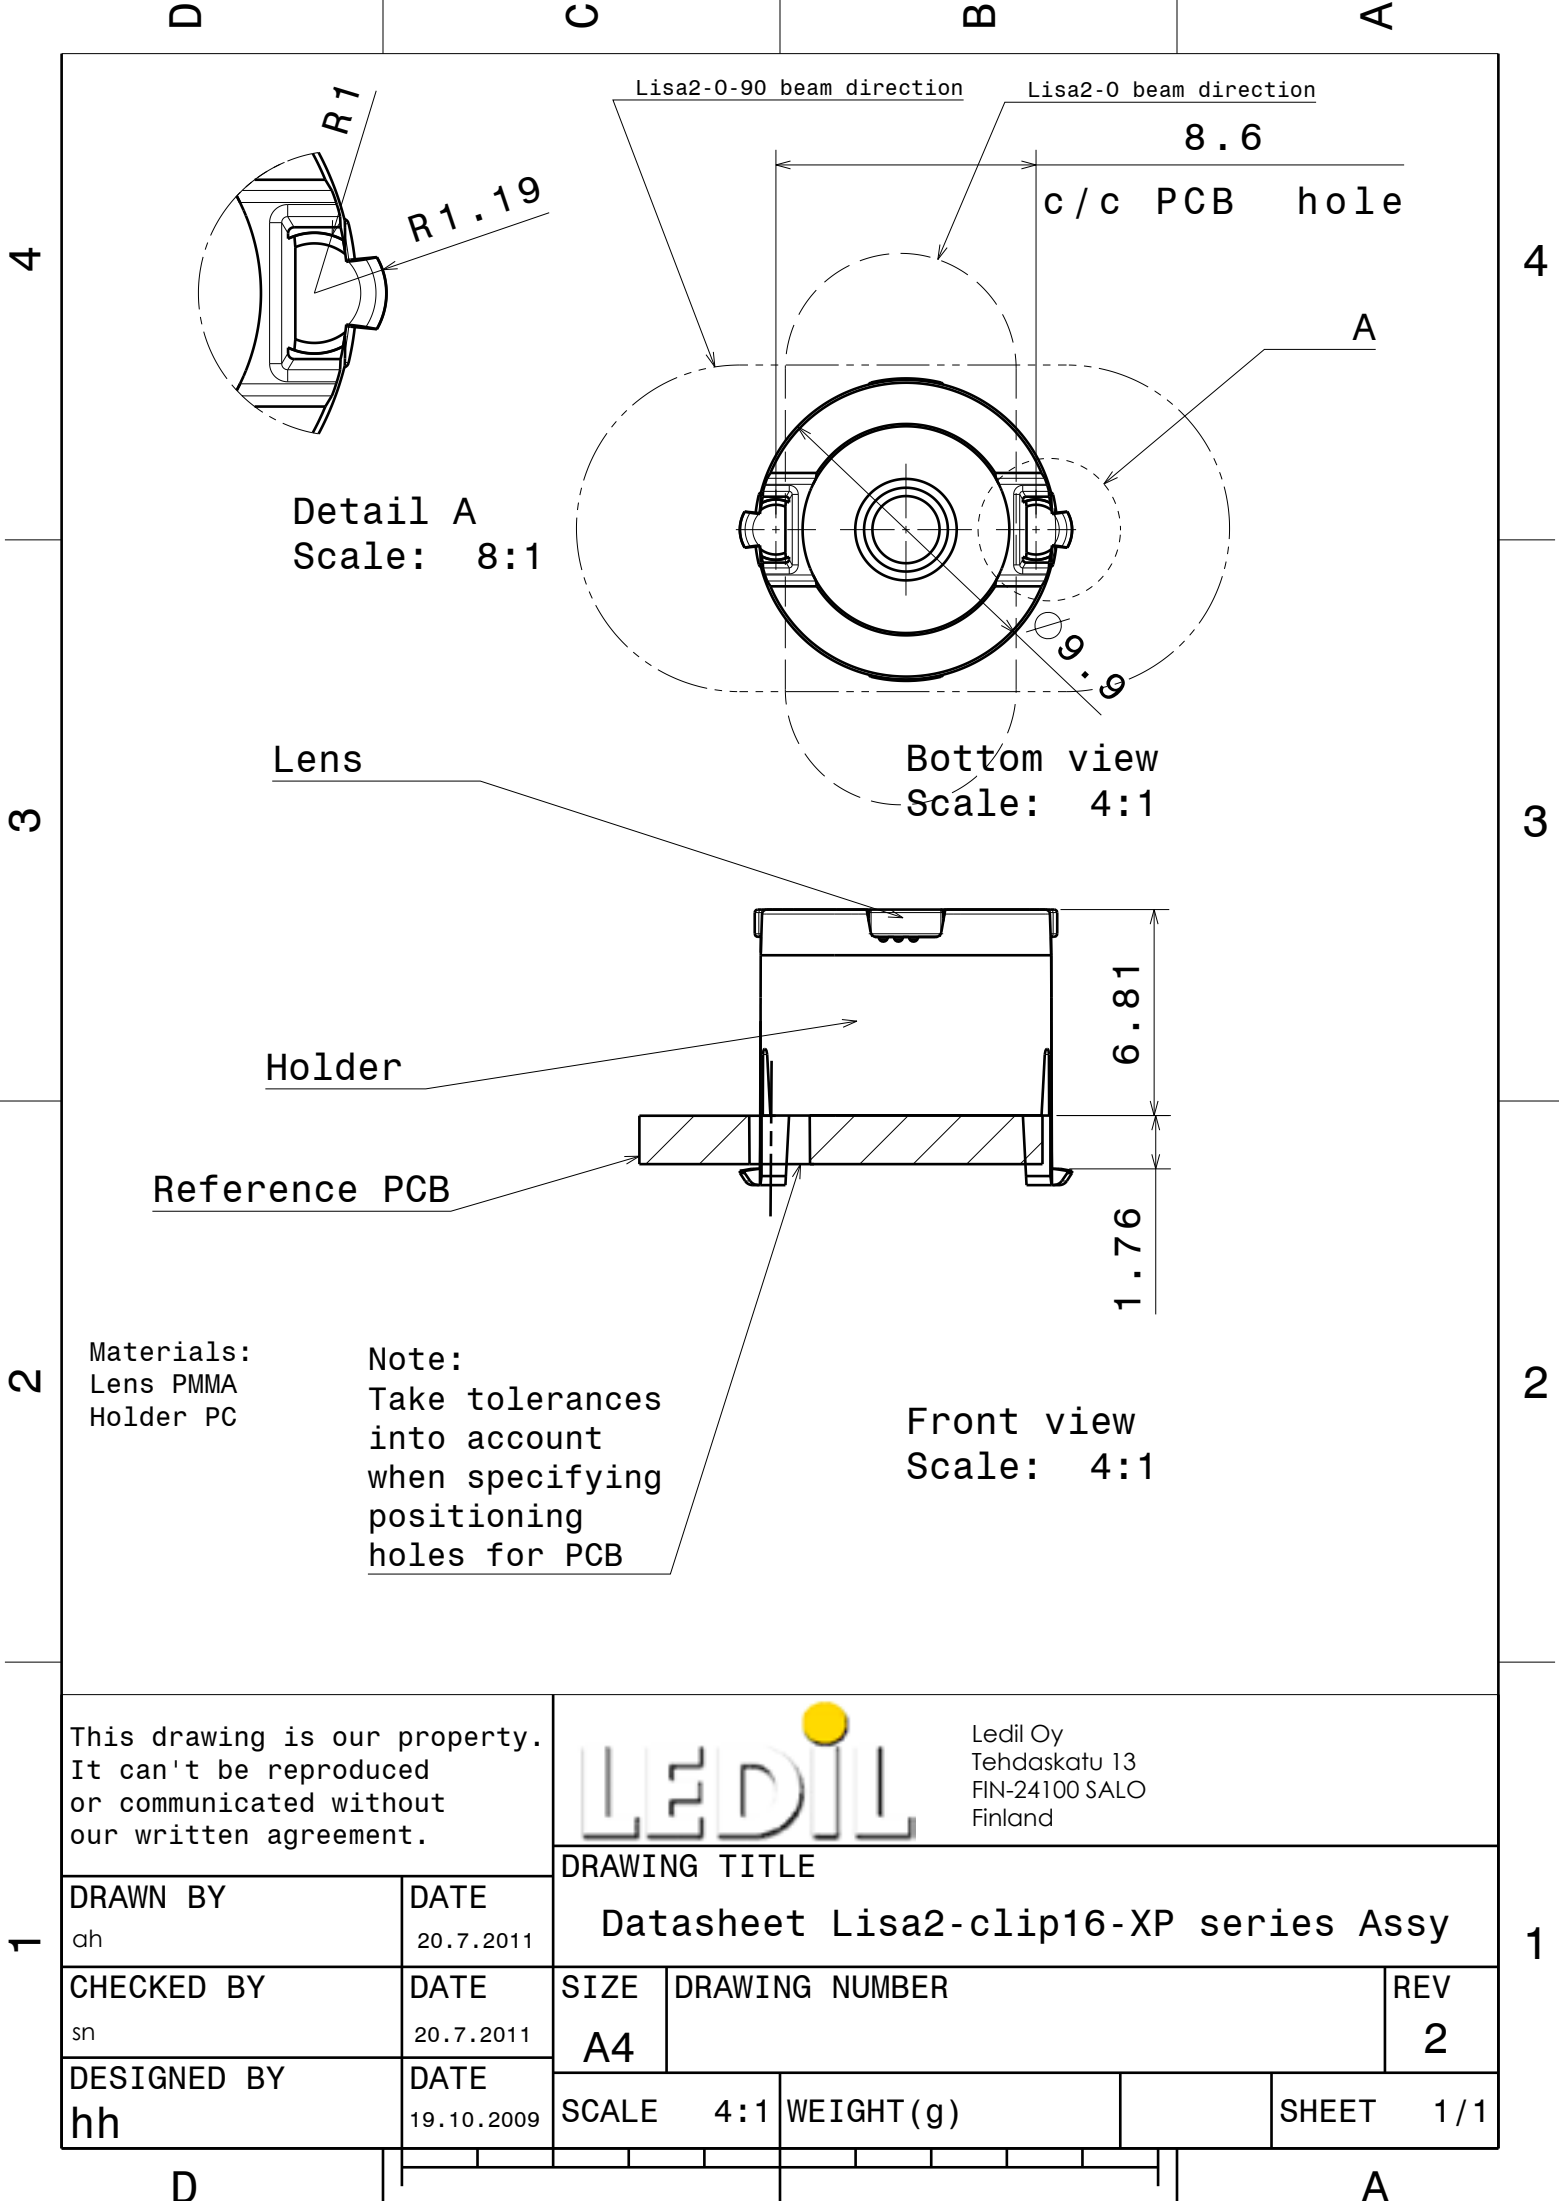

This drawing is our property.
It can't be reproduced
or communicated without
our written agreement.



Ledil Oy
Tehdaskatu 13
FIN-24100 SALO
Finland

DRAWING TITLE

Datasheet Lisa2-clip16-XP series Assy

DRAWN BY

ah

DATE

20.7.2011

CHECKED BY

sn

DATE

20.7.2011

DESIGNED BY

hh

DATE

19.10.2009

SIZE

A4

DRAWING NUMBER

REV

2

SCALE


4:1

WEIGHT (g)

SHEET


1 / 1

Luminaire: LEDil Oy FP11085_LISA2-RS-CLIP_(Luxeon_Z_ES) Efficiency=84%
Lamps: 1 x Philips Lumileds Luxeon Z ES (LXZ2-3090) 50.4lm @ 250mA CCT=3200K P=0.7 I=250mA

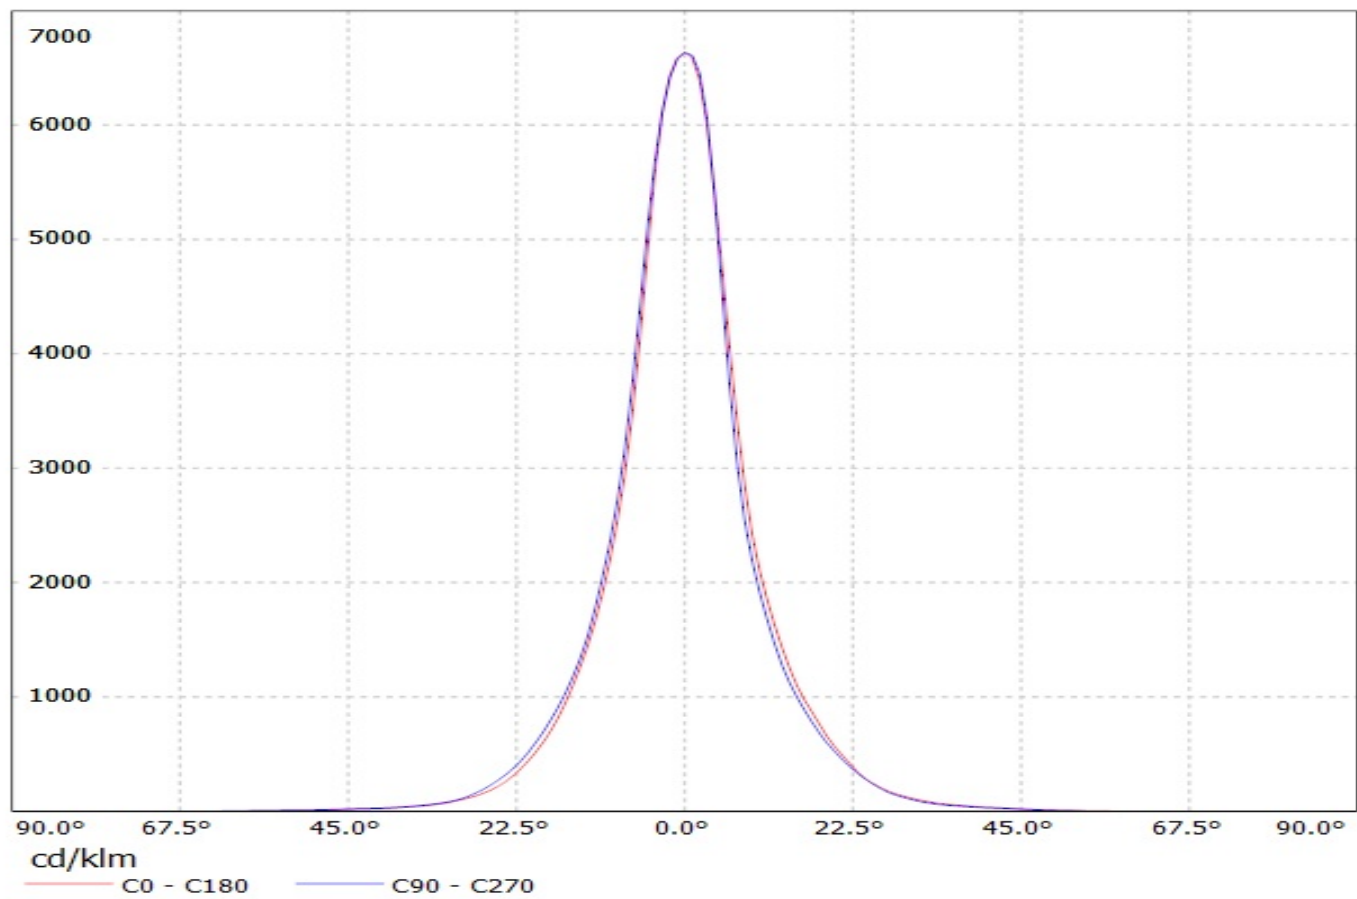

Luminaire: LEDil Oy FP11085_LISA2-RS-CLIP_(Luxeon_Z_ES) Efficiency=84%

Lamps: 1 x Philips Lumileds Luxeon Z ES (LXZ2-3090) 50.4lm @ 250mA CCT=3200K P=0.7 I=250mA

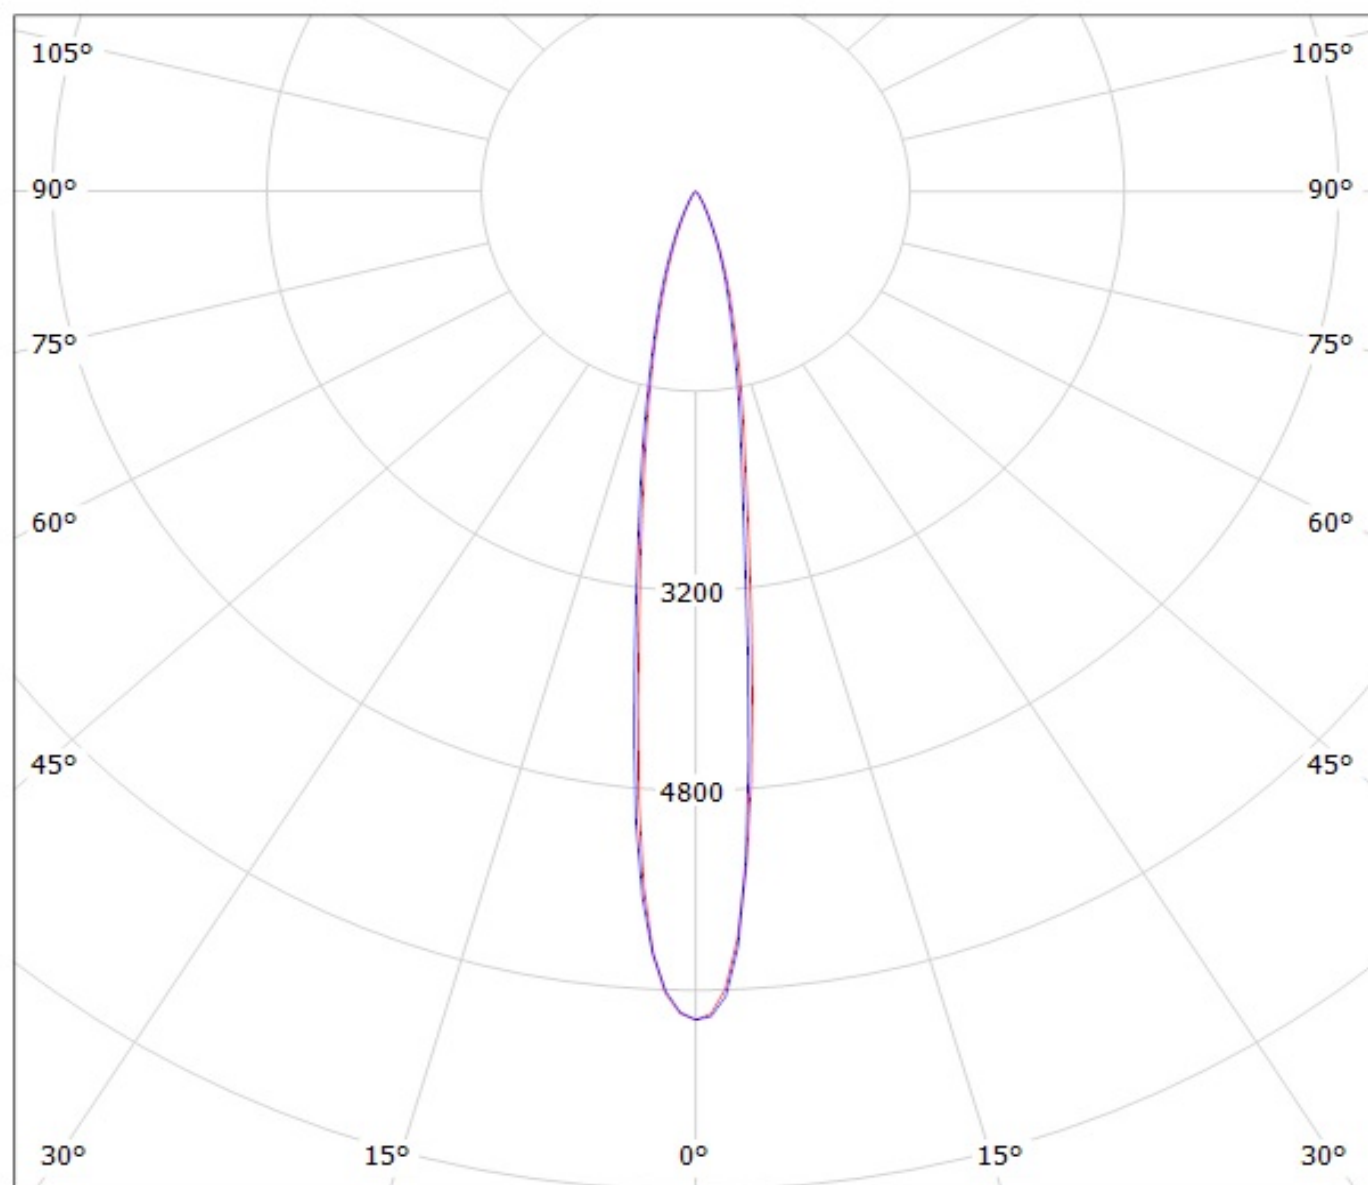

cd/klm

— C0 - C180

— C90 - C270

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.