

SUMMARY

Wires

| | |
|------|---|
| Coax | 1 |
|------|---|



Image is for illustrative purpose only

| | |
|------------------|-----------------------------------|
| Series | 01 |
| Termination type | Female print PCB |
| IP rating | 50 |
| AWG wire size | 0.00 - 0.00 |
| Cable Ø | 0.00 - 0.00 mm |
| Status | active |
| Matching parts | FFS.01.250.DLAE31 |

Download

[Request a quote](#)
[PCB Eagle Pattern](#)
[PCB Altium Pattern](#)
[PCB KiCad Pattern](#)
[Catalog](#)

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|--|
| Shell Style/Model | EPA.01*: Straight receptacle for printed circuit |
| Keying | Circular, female |
| Housing Material | Brass (gold plated) shell, collet nut, brass latch sleeve and mid pieces |
| Weight | 1.50 g |

Performance

| | |
|---------------|--------------------------|
| Configuration | 01.250 : 1 Coax (50 Ohm) |
| Insulator | |
| Rated Current | |


Others

Endurance (Shell): 1000 mating cycles

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

DRAWINGS

Draws

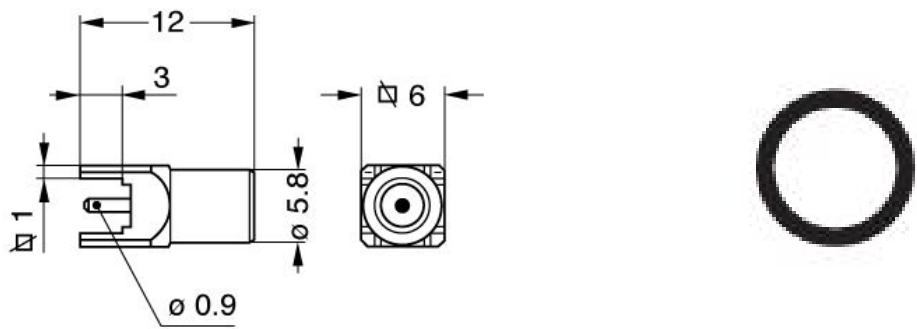

Dimensions

| | A | B | K | L |
|-----|------|------|------|------|
| mm. | 5.8 | 6 | 3 | 12 |
| in. | 0.23 | 0.24 | 0.12 | 0.47 |

RECOMMENDED BY LEMO

Tools

Cables

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.