

## SUMMARY

### # Wires

Triax	1
-------	---



*Image is for illustrative purpose only*

Series	T7
Termination type	Male solder
IP rating	68
AWG wire size	0.00 - 0.00
Cable Ø	0.00 - 0.00 mm
Status	active

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FAZ*: Plug, collet clamp
Keying	Circular, male
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Weight	213.13 g

### Performance

Configuration
Insulator
Rated Current

### Specifications

Contact Type: Solder
----------------------

### Others


Endurance (Shell): 5000 mating cycles
Temp (min / max): -55°C / +250°C
Humidity (max): ≤95% [at 60 deg C / 140 F]
Vibration: 15 g [10 Hz - 20000 Hz]
Shock Resistance: 100 g [ 6 ms]

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Salt Spray Corrosion: >1000 hr

# DRAWINGS

## Draws

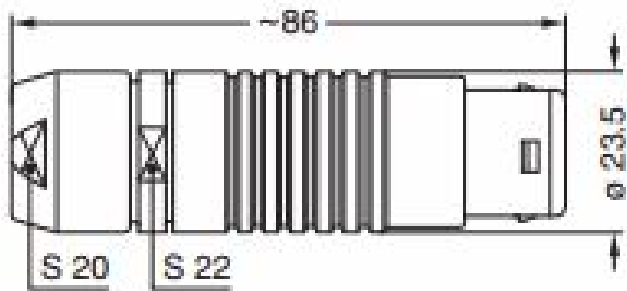

## Dimensions

	A	L	S1	S2
mm.	23.5	86	22	20
in.	0.93	3.39	0.87	0.79

# RECOMMENDED BY LEMO

## Tools

## Cables

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.