

Product Brief



ANT-LPX-FPC-100

LTE/LPWA/WiFi Flexible Embedded Dipole Antenna

The ANT-LPX-FPC-100 (LPX) antenna is a flexible embedded multiband cellular and cellular IoT antenna (LTE-M and NB-IoT) ideal for use in LTE bands 5, 8, 12, 13, 14, 17, 20, 28, while also supporting low-power, wide-area (LPWA) networking at 868 MHz and 915 MHz and WiFi/WLAN applications.

The LPX provides a ground plane independent dipole embedded antenna solution comparable in performance to an external antenna. The LPX's flexibility and adhesive backing makes it easy to mount in unique and custom enclosures, while enabling an environmentally sealed enclosure and protection from tampering or accidental antenna damage.

Connection is made to the radio via a 100 mm long, 1.13 mm coaxial cable terminated in an MHF1/U.FL compatible plug connector.



Features

- Excellent low-band LTE coverage, 698 MHz to 960 MHz, including LTE 5, 8, 12, 13, 14, 17, 20, 26, 28 and 29
 - VSWR: ≤ 3.9
 - Peak Gain: 4.4 dBi
 - Efficiency: 67%
- Compact, low-profile
 - 120.0 mm x 50.0 mm x 0.2 mm
- MHF1/U.FL compatible plug (female socket) on 100 mm of 1.13 mm coaxial cable
- Flexible to fit in challenging enclosures
- Adhesive backing permanently adheres to non-metal enclosures using 3M 467MP™/200MP adhesive

Applications

- Worldwide LTE, UMTS and GSM
- Cellular IoT: LTE-M (Cat-M1) and NB-IoT
 - AT&T: bands 12, 17
 - Verizon: band 13
 - Europe: bands 8, 20
 - Latin America: bands 5, 28
 - Asia Pacific: bands 5, 8, 20, 28
- Single- and dual-band WiFi/WLAN/802.11
- Low-power, wide-area (LPWA) applications
 - LoRaWAN®
 - Sigfox®
- ISM: Bluetooth® and ZigBee®
- Citizens Broadband Radio Service (CBRS)
- UHF RFID readers
- Internet of Things (IoT) devices

Ordering Information

Part Number	Description
ANT-LPX-FPC-100	Antenna with 100 mm of 1.13 mm coaxial cable and MHF1/U.FL compatible plug (female socket)

Available from Linx Technologies and select distributors and representatives.

Electrical Specifications

Select Bands	Frequency Range	VSWR (max.)	Peak Gain (dBi)	Avg. Gain (dBi)	Efficiency (%)
LTE 12, 13, 14, 17, 26, 28, 29	698 MHz to 803 MHz	3.9	3.6	-2.3	63
LTE 5, 8, 20	791 MHz to 960 MHz	2.0	4.4	-1.7	71
LTE 1, 2, 3, 4, 10, 25, 66	1710 MHz to 2200 MHz	3.3	4.9	-2.2	66
LTE 30, 40	2300 MHz to 2400 MHz	2.8	3.1	-2.4	58
LTE 7, 41	2496 MHz to 2690 MHz	2.5	3.4	-2.0	67
LTE 22, 42, 43, 48, 49, 52	3300 MHz to 3800 MHz	3.1	4.4	-2.5	59
GNSS/GPS	1553 MHz to 1609 MHz	2.8	5.3	-1.8	69
ISM	2400 MHz to 2485 MHz	2.5	3.1	-2.4	59
U-NII/ISM	5150 MHz to 5850 MHz	3.6	6.7	-2.6	59

Polarization	Linear	Wavelength	1/2-wave
Radiation	Omnidirectional	Electrical Type	Dipole
Max Power	2 W	Impedance	50 Ω
Connection	MHF1/U.FL compatible plug (female socket) on 100 mm of 1.13 mm coaxial cable.		
Weight	3.5 g (0.12 oz)		
Dimensions	120.0 mm x 50.0 mm x 0.2 mm (4.72 in x 1.97 in x 0.01 in)		
Operating Temp. Range	-40 °C to +85 °C		
ESD Sensitivity	NOT ESD sensitive. As a best practice, Linx may use ESD packaging.		

VSWR

Figure 1 provides the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

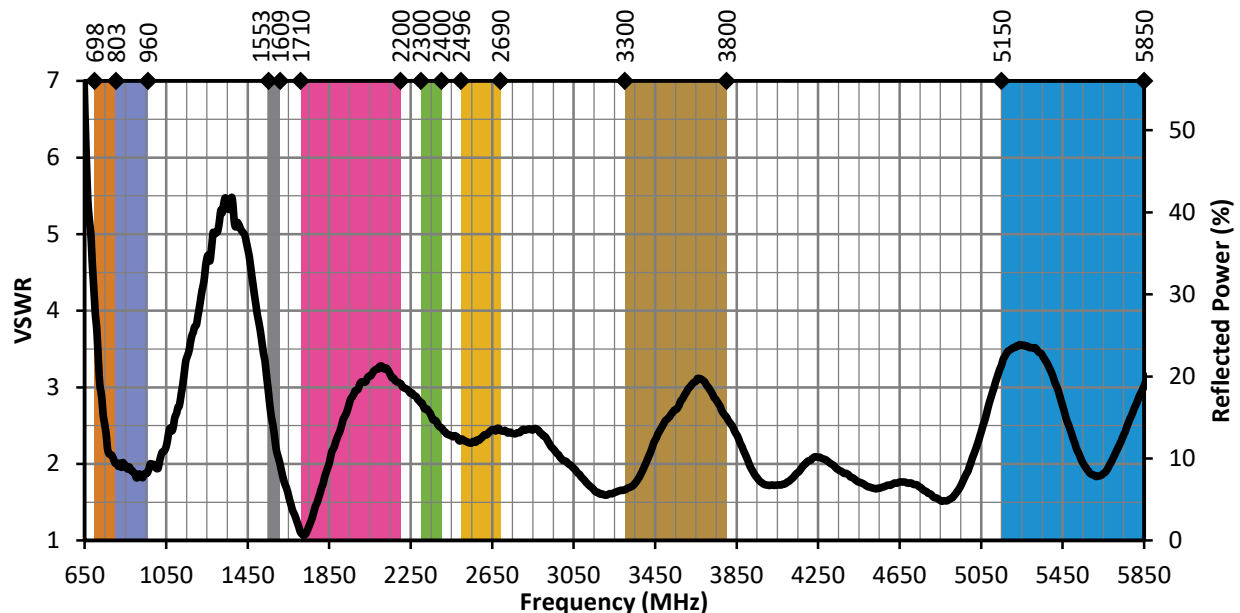


Figure 1. LPX Antenna VSWR with Frequency Band Highlights

Website: <http://linxtechnologies.com> • Phone: +1 (541) 471-6256 • E-MAIL: info@linxtechnologies.com • Linx Offices: 159 Ort Lane, Merlin, OR, US 97532

Linx Technologies reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Wireless Made Simple is a registered trademark of Linx Acquisitions LLC. Bluetooth is a registered trademark of Bluetooth SIG, Inc. LoRaWAN is a registered trademark of Semtech Corporation. Sigfox is a registered trademark of SIGFOX. ZigBee is a registered trademark of ZigBee Alliance, Inc. 3M 467MP/200MP is a trademark of 3M. Other product and brand names may be trademarks or registered trademarks of their respective owners.

Copyright © 2019 Linx Technologies All Rights Reserved

