
UNCONTROLLED DOCUMENT

ø8.00	[ø0.315]

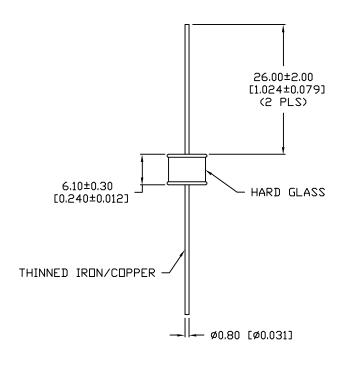

part number GT—BG75L

 REV.
 E.C.N. NUMBER AND REVISION COMMENTS
 DATE

 A
 E.C.N. #10BRDR. & REDRAWN.
 4.22.98

 B
 E.C.N. #10710.
 1.26.01

REV.

ELECTRICAL SPECIFICATIONS

ELECTRICAL SI ECHITORITIONS				
PARAMETER	VALUE	TEST CONDITION		
D.C. FIRING VOLTAGE:	80V±30% D.C.	(dv/dt 100V/S)		
IMPULSE FIRING VOLTAGE:	1000V D.C. MAX.	(dv/dt 100V/µS)		
IMPULSE CURRENT:	5KA MAX.	(8/20µS)		
D.C. HOLDOVER VOLTAGE:	50V D.C. MAX.	(150mS MAX.)		
A.C. DISCHARGE CURRENT:	5A	(1S X 10 TIMES)		
INSULATION RESISTANCE:	10⁴MΩ MIN.	(50 OR 100VDC)		
INTER-ELECTRODE CAPACITANCE:	2 PF MAX.	1.0kHz		

ENVIRONMENTAL SPECIFICATIONS PER MIL-STD 202

TEST	METHODE	CONDITION	RATING
VIBRATION TESTING:	204B	С	10-55Hz, .06DA
SHOCK	213A	С	100 g
HUMIDITY:	103B	В	95% Re. HUMIDITY
TEMPERATURE CYCLING:	102A	С	-65 TO +125 °C
BAROMETRIC PRESSURE:	105C	В	50,000 ft.
THERMAL SHOCK:	107	В	-65 TO +125 °C
SOLDERABILITY:	208	В	

RESPONSE TIME

SURGE TYPE	(Rt MAX.)
1Kv/mS	1 x 10 ⁻⁵ sec.
1Kv/µS	1 x 10 ⁻⁸ sec.
5Kv/µS	1 x 10 ⁻⁹ sec.

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.004), MAX.= +0.00 (±0.0

PART NUMBER

THE INFORMATION CONFIDENTIAL INFORMATION OF THE INFORMATI

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 5.12.95
PAGE: 1 OF 1
CT SCALE: N/A

REV. B

PART NUMBER

GT-BG75L

MEDIUM DUTY,

AXIAL LEADED SURGE ARRESTOR, 75 VDC.