



We Tame Photons to Work for You!



Products > LEDs > Surface Mount > SOT-23 Package > Half Moon Solder Terminals

Features / Options



- ▶ State-of-the-Art, High Brightness Chip Technology
- ▶ Choice of Colors and Lens Finishes
- ▶ Lead Frame / Lens Casting Reliability
- ▶ Easy-to-Solder Leads, Tin Finish
- ▶ Available Bulk or on Tape and Reel
- ▶ Lead Trimming and Forming Available
- ▶ Custom Shapes, Easily Tooled, Low Minimum

Applications / Uses




- ▶ Board or Panel Indication or Illumination
- ▶ Annunciator and Control Panels
- ▶ Telecom Switches and Central Station Equipment
- ▶ Large Panel Indicators

Part Number:	SPEC	Brightness	Dice Material	Emitted Color	Peak Wavelength	Epoxy Lens	Operating Typ Vf (V)	Intensity Typ, mcd @ 20 mA	View Angle 2x Theta		
SML-LX15AC-RP-TR		STANDARD	GaAsP	Amber	605	Clear	2.0	10	140		—
SML-LX15AC-TR		STANDARD	GaAsP	Amber	605	Clear	2.0	10	140		—
SML-LX15AGC-RP-TR		STANDARD	GaAsP		605	Clear	2.0/2.2	10	140		—
SML-LX15AGC-TR		STANDARD	GaAsP	Amber/Green	605	Clear	2.0/2.2	10	140		—
SML-LX15AYC-RP-TR		STANDARD	GaAsP	Amber/Green	605	Clear	2.0/2.1	10	140		—
SML-LX15AYC-TR		STANDARD	GaAsP	Amber/Yellow	605	Clear	2.0/2.1	10	140		—
SML-LX15GC-RP-TR		STANDARD	GaP	Green	565	Clear	2.1	10	140		—
SML-LX15GC-TR		STANDARD	GaP	Green	565	Clear	2.1	10	140		—
SML-LX15GGC-RP-TR		STANDARD	GaP	Green	565	Clear	2.2	10	140		—
SML-LX15GGC-TR		STANDARD	GaP	Green/Green	565	Clear	2.2	10	140		—


SML-LX15GIC-RP-TR		STANDARD	GaP		565	Clear	2.2/2.0	10	140		
SML-LX15GIC-TR		STANDARD	GaP	Green/Red	565	Clear	2.2/2.0	10	140		
SML-LX15GYC-RP-TR		STANDARD	GaP	Green/Yellow	565	Clear	2.2/2.1	10	140		
SML-LX15GYC-TR		STANDARD	GaP	Green/Yellow	565	Clear	2.2/2.1	10	140		
SML-LX15IC-RP-TR		STANDARD	GaAsP	Red	635	Clear	2.0	10	140		
SML-LX15IC-TR		STANDARD	GaAsP	Red	635	Clear	2.0	10	140		
SML-LX15IGC-RP-TR		STANDARD	GaAsP	Red/Green	635	Clear	2.0/2.2	10	140		
SML-LX15IGC-TR		STANDARD	GaAsP	Red/Green	635	Clear	2.0/2.2	10	140		
SML-LX15IIC-RP-TR		STANDARD	GaAsP	Red	635	Clear	2.0	10	140		
SML-LX15IIC-TR		STANDARD	GaAsP	Red/Red	635	Clear	2.0	10	140		
SML-LX15IYC-RP-TR		STANDARD	GaAsP	Red/Yellow	635	Clear	2.0/2.1	10	140		
SML-LX15PGC-RP-TR		STANDARD	GaP	Green	555	Clear	2.2	5	140		
SML-LX15PGC-TR		STANDARD	GaP	Green	555	Clear	2.2	5	140		
SML-LX15SBC-RP-TR		STANDARD	SiC	Blue	430	Clear	4.5	40	140		
SML-LX15SBC-TR		STANDARD	SiC	Blue	430	Clear	4.5	40	140		
SML-LX15SGC-RP-TR		STANDARD	GaP	Green	565	Clear	2.2	15	140		
SML-LX15SGC-TR		STANDARD	GaP	Green	565	Clear	2.2	15	140		
SML-LX15SIC-RP-TR		HIGH	AlInGaP	Red	636	Clear	2.0	60	140		
SML-LX15SIC-TR		HIGH	AlInGaP	Red	636	Clear	2.0	60	140		
SML-LX15SOC-TR		HIGH	AlInGaP	Orange	610	Clear	2.0	60	140		
SML-LX15SRC-RP-TR		STANDARD	GaAIAs	Red	660	Clear	1.7	20	140		
SML-LX15SRC-TR		STANDARD	GaAIAs	Red	660	Clear	1.7	20	140		
SML-LX15SUGC-RP-TR		HIGH	AlInGaP	Green	574	Clear	2.2	45	140		
SML-LX15SUGC-TR		HIGH	AlInGaP	Green	574	Clear	2.2	45	140		
SML-LX15SYC-RP-TR		HIGH	AlInGaP	Yellow	590	Clear	2.0	60	140		

SML-LX15SYC-TR		HIGH	AlInGaP	Yellow	590	Clear	2.1	60	140		—
SML-LX15UPGC-RP-TR		HIGH	InGaN	Green	525	Clear	3.5	45	140		—
SML-LX15UPGC-TR		HIGH	InGaN	Green	525	Clear	3.5	45	140		—
SML-LX15USBC-RP-TR		HIGH	InGaN	Blue	470	Clear	3.5	120	140		—
SML-LX15USBC-TR		HIGH	InGaN	Blue	470	Clear	3.5	120	140		—
SML-LX15YC-RP-TR		STANDARD	GaAsP	Yellow	585	Clear	2.1	10	140		—
SML-LX15YC-TR		STANDARD	GaAsP	Yellow	585	Clear	2.1	10	140		—
SML-LX15YGC-RP-TR		STANDARD	GaAsP		585	Clear	2.1/2.2	10	140		—
SML-LX15YGC-TR		STANDARD	GaAsP/GaP	Yellow/Green	585	Clear	2.1/2.2	10	140		—
SML-LX15YYC-RP-TR		STANDARD	GaAsP	Yellow	585	Clear	2.1	10	140		—
SML-LX15YYC-TR		STANDARD	GaAsP	Yellow/Yellow	585	Clear	2.1	10	140		—

UNCONTROLLED DOCUMENT

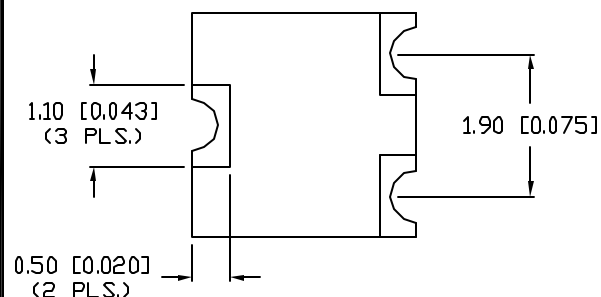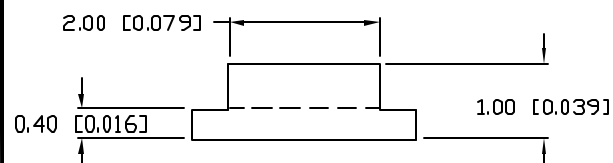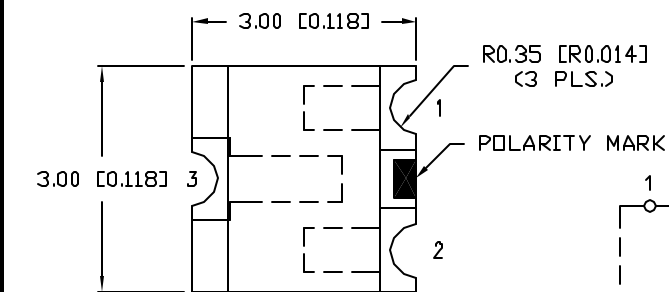

TAPE SPEC DETAIL

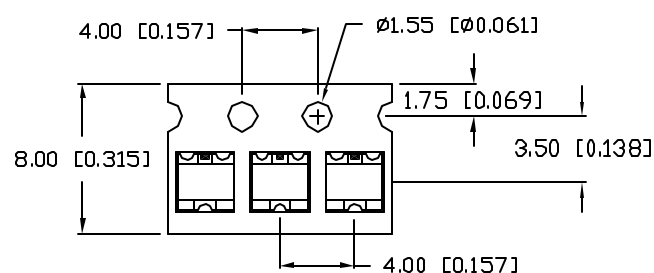

TAPE FEED DIRECTION →

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005).

LEAD SIZE=±0.05 (0.002), LEAD LENGTH=±0.75 (±0.030), MIN.=+DECIMAL PRECISION -0.00, MAX.=+0.00 -DECIMAL PRECISION

REV.

D

PART NUMBER

SML-LX15YC-TR

SOT-23 REPLACEMENT, SURFACE MOUNT LED,
585nm YELLOW LED,
WATER CLEAR LENS, TAPE AND REEL

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

PART NUMBER		REV.
SML-LX15YC-TR		D
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #10967.	3.14.03
B	E.C.N. #11010.	7.3.03
C	E.C.N. #11148.	11.30.05
D	E.C.N. #11361	11.28.06

ELECTRO-OPTICAL CHARACTERISTICS $T_A=25^\circ\text{C}$ $I_f=20\text{mA}$

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		585		nm	
FORWARD VOLTAGE		2.1	2.8	V_f	
REVERSE VOLTAGE	5.0			V_r	$I_r=100\mu\text{A}$
AXIAL INTENSITY		10		mcd	$I_f=20\text{mA}$
VIEWING ANGLE		140		2θ	
EMITTED COLOR:	YELLOW				
EPOXY LENS FINISH:	WATER CLEAR				

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	160	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	100	mW
DERATE FROM 25°C	-1.2	mW/ $^\circ\text{C}$
OPERATING, STORAGE TEMP.	-40 TO +85	$^\circ\text{C}$

* $t < 10\mu\text{s}$

NOTES:

1. THE POLARITY MARK IS ORIENTED TOWARDS THE TAPE SPROCKET HOLE.

CAUTION: MOISTURE SENSITIVE DEVICE
PER JEDEC LEVEL 4 STANDARDS

UNCONTROLLED DOCUMENT



DRAWN BY:

JC

CHECKED BY:

APPROVED BY:

DATE: 11.28.06

PAGE: 1 OF 1

SCALE: N/A