



Mallory Sonalert Products, Inc.

Part #: **SBT12MMPPC**

Sales Outline Drawing


Revision: **C**

| Specifications: | cUL Recognized to IEC60601-1-8 - Artificial Perfusion Melody | | | |
|------------------------|--|---|---|--|
| Sound Level Category: | Silence | Loud | Loud | Loud |
| Mode of Operation: | Silence - NO SOUND | Low Priority Alarm 2 beeps repeating every 30 sec | Medium Priority Alarm 3 beeps repeating every 7.5 sec | High Priority Alarm 10 beeps repeating every 2.5 sec |
| Loudness @ 10cm: | | 85 to 95 dB(A) Typ. | 85 to 95 dB(A) Typ. | 85 to 95 dB(A) Typ. |
| Frequency: | 150 to 4000 Hz | | | |
| Connection: | Connect "+" to "+" & "-" to "-" of Power Supply | Connect "+" to "+" & "-" & L to "-" of Power Supply | Connect "+" to "+" & "-" & M to "-" of Power Supply | Connect "+" to "+" & "-" & H to "-" of Power Supply |
| Voltage Rating: | 9 to 12 VDC | | | |
| Average Current Draw: | <15mA Typ. | <15mA Typ. | <15mA Typ. | <20mA Typ. |
| Ipk Current*: | 75mA | | | |
| Housing Material: | ABS 777D Plastic Resin, Black | | | |
| Storage Temperature: | -40° to +85° C | | | |
| Operating Temperature: | -30° to +65° C | | | |
| Weight Typical: | 0.6 oz (17g) | | | |
| Options: | Please contact factory. | | | |

Dimensions: Inches [mm] **cUL Recognized** **ROHS Compliant**

Before Code Date: 1546 Not cUL Recognized

After Code Date: 1547 cUL Recognized

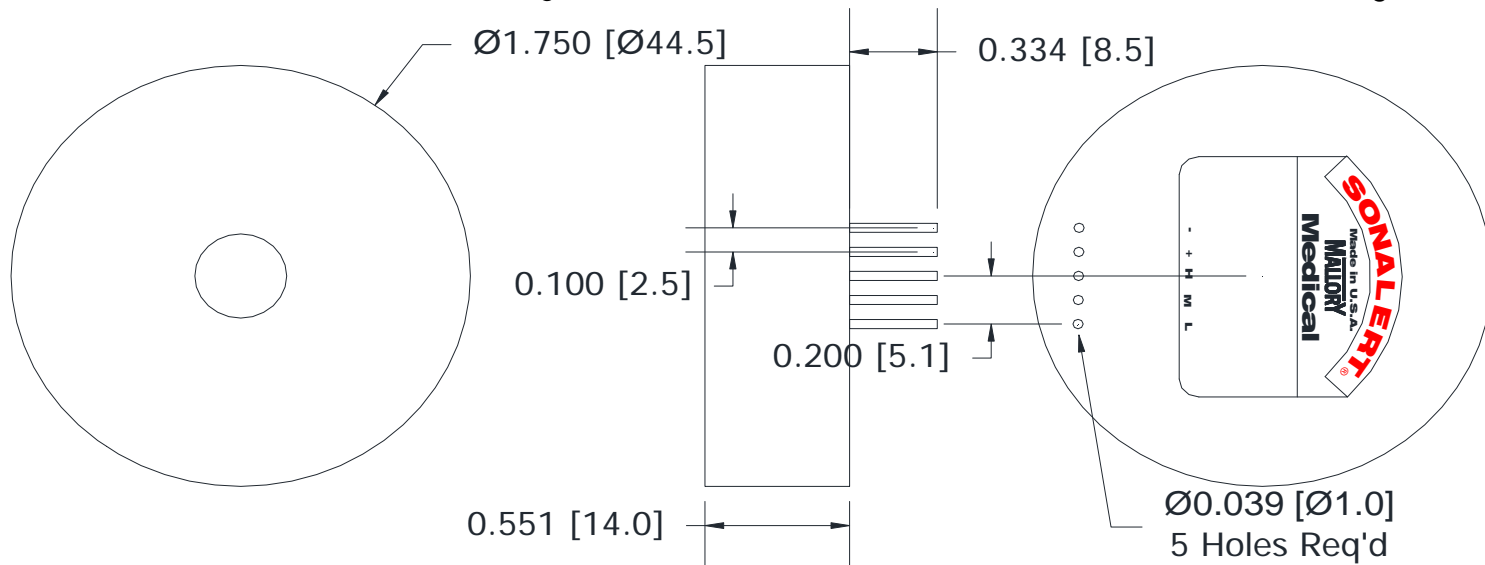

*Ipk = Instantaneous Peak