




## Thermoelectric Cooler RC12- 6


RoHS 2002/95/EC Compliant

### Performance Values

| Hot Side Temperature (°C)                  | 27°C | 50°C |
|--------------------------------------------|------|------|
| $\Delta T_{max}$ (°C-dry N <sub>2</sub> ): | 66   | 74   |
| Q <sub>max</sub> (watts):                  | 54   | 60   |
| I <sub>max</sub> (amps):                   | 5.6  | 5.6  |
| V <sub>max</sub> (vdc):                    | 14.7 | 16.4 |
| AC Resistance (ohms):                      | 2.2  | ---  |

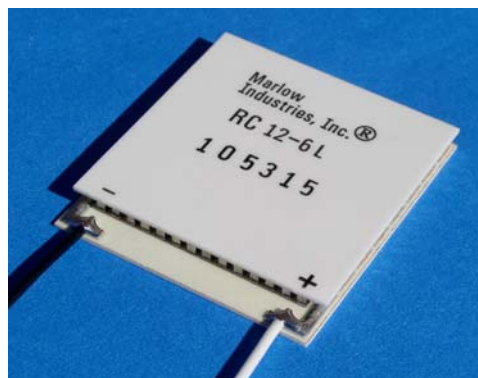

### Mechanical Characteristics

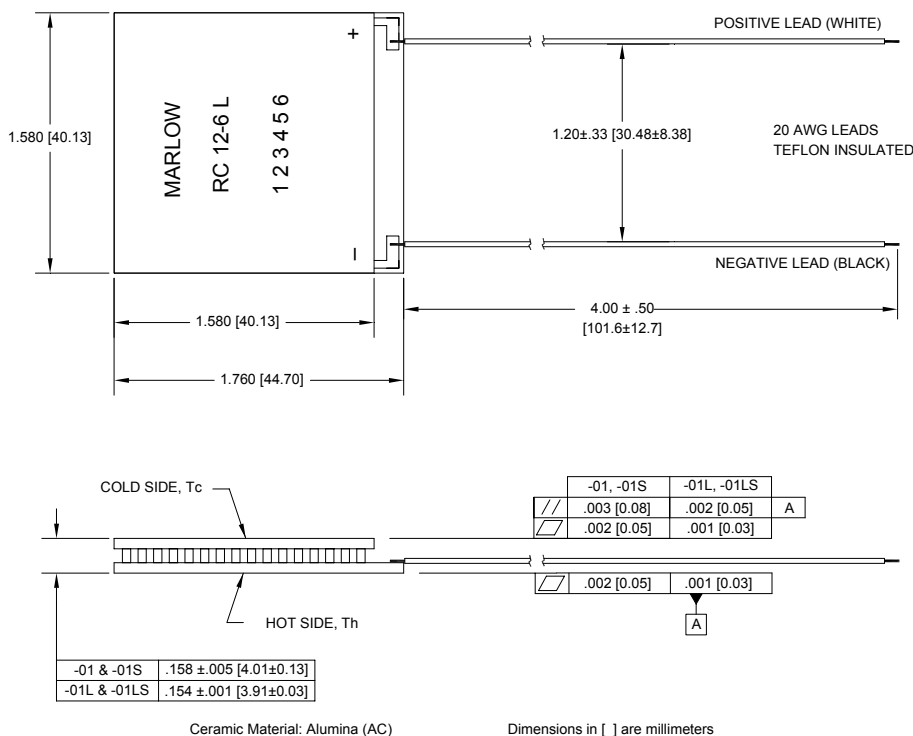

### Ordering Options

| Model Number | Description             |
|--------------|-------------------------|
| RC12-6-01    | Base Model w/ leads     |
| RC12-6-01L   | Lapped Model            |
| RC12-6-01S   | Sealed Model            |
| RC12-6-01LS  | Lapped and Sealed Model |

### Features


- RoHS 2002/95/EC compliant
- Solid-state reliability.
- Built with high temperature solder with the ability to withstand higher assembly processing temperatures for short periods of time (<160°C).
- Superior nickel diffusion barriers on elements
- High strength for rugged environment.
- Porched configuration for enhanced leadwire strength
- RTV sealing available (Optional)
- Lapped option available for multiple module applications.




## Performance Curves

Environment: One atmosphere dry nitrogen

Hot Side Temperature: 27°C

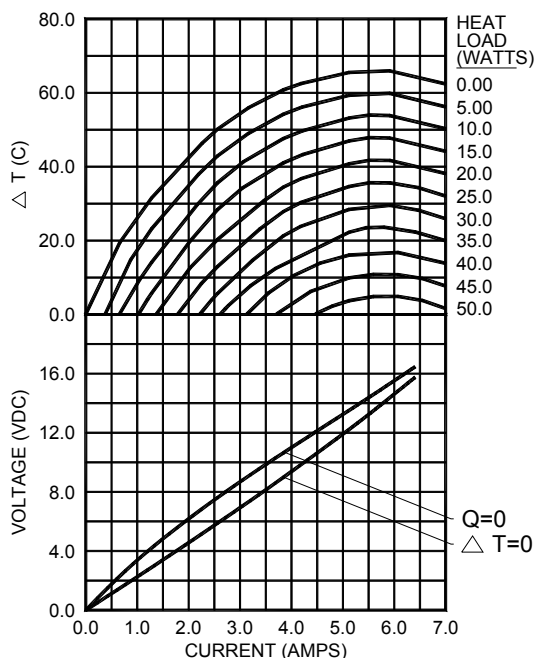

Hot Side Temperature: 50°C

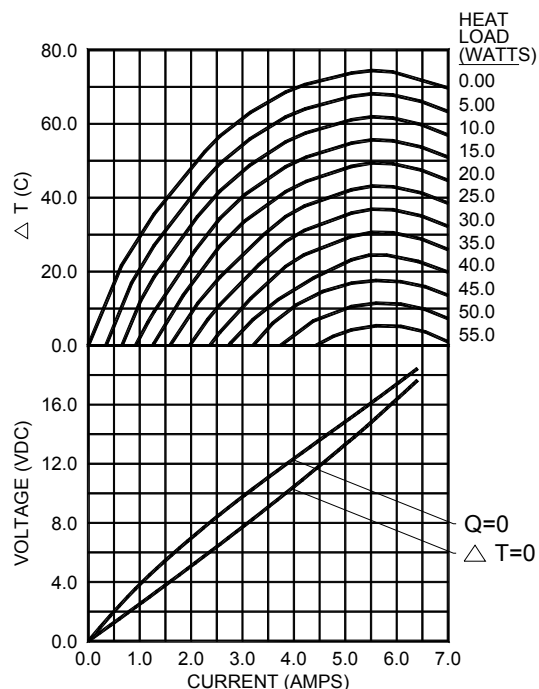

For performance information in a vacuum or with hot side temperatures other than 27°C or 50°C, consult one of our Applications Engineers.

## Installation

Recommended mounting methods: Bonding with thermal epoxy or soldering with metallized ceramics. For additional information, please refer to our TEC Installation Guide.

## Operation Cautions

For maximum reliability, storage and operation below 85°C in a non-condensing environment is recommended. To minimize thermal stress, use linear/proportional temperature control or a similar method rather than an ON/OFF method.

## Addresses

**Marlow Industries, Inc.**  
10451 Vista Park Road  
Dallas Texas 75238-1645  
214-340-4900 (tel)  
214-341-5212 (fax)  
[www.marlow.com](http://www.marlow.com)

**Marlow Industries Europe**  
Aberdeen House, South Road  
Haywards Heath  
West Sussex RH164NG UK  
+44 (0)1444-443404 (tel)  
+44 (0)1444-443334(fax)

**Marlow Industries Japan**  
1-1-8-401  
Uehara, Shibuya-ku  
Tokyo, Japan 151-0064  
+81 (3) 5454-5280 (tel)  
+81 (3) 5454-5281(fax)