



SERIES 1550 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 16 (4) A 250 V AC



PRODUCT FEATURES

- Inrush currents (capacitive) up to 100 A
- Two housing variants (with flange or lower lying)
- With mechanical forced opening
- Illuminated window with lens effect

ON REQUEST

- Other colors
- Other rocker labelings
- Other lamp variants
- Conformity IEC 60065 chap. 14.6
- Special rockers
- Cable assembly

Mechanical life endurance	5E4
Inrush current (capacitive)	100 A
Contact distance	≥ 3 mm
Contact resistance (new condition)	< 100 mOhm (1 A 12 V DC)
Insulation resistance (new condition)	> 100 MOhm (500 V DC)
Proof tracking	250 PTI
Protection type	IP 40
Ambient temperature	terminal side -20 °C ... +100 °C actuating side -20 °C ... +55 °C
Flammability	UL 94 V-2 UL 94 V-0 (product-dependent)
Glow wire test temperature	850 °C
Material actuator housing	PA PA
Plug force of the terminals	≤ 80 N
Approval marks	 /  /  / 
Suitable for appliances of protection class II	



SERIES 1550 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 16 (4) A 250 V AC

 single-pole 	Lighting voltage (V)	Actuator color / printing	Housing color	7 A 250 V AC 5E4	16 (4) A 250 V AC 5E4	16 (4) A 250 V AC 1E4	10 (4) A 250 V AC 5E4	10 (4) A 250 V AC 25E3	10 A 12 V DC	20 mA 250 V AC 5E4	20 A 250 V AC 2 HP	20 A 125 V AC 1 HP	16 A 250 V AC 2 HP	16 A 125 V AC 1 HP	Terminal type	Terminal description	Contact material	EN 60335 cap. 30 conform "G"	Miscellaneous	Stock version
ON / OFF switch (SPST)																				
1550.3102	230					○	○						○			6.3	Ag			
1550.3609	12							○								6.3	Ag		lower lying flange	
1551.3102						○	○						○	○		6.3	Ag	○		○
1551.3103						○	○						○	○		6.3	Ag			
1551.3106						○	○						○	○		6.3	Ag			
1551.2654									○								Au		approvals KEMA lower lying flange	
Normally closed contact (SPNC)																				
1581.1303					○								○	○		6.3	Ag	○	increased life endurance at a high electrical rating	
1551.1303						○	○						○	○		6.3	Ag			
Normally open contact (SPNO)																				
1551.3202						○	○						○	○		6.3	Ag			○
1551.3702						○	○						○	○		6.3	Ag		lower lying flange	

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH 'N' DRIVE



SERIES 1550 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 16 (4) A 250 V AC

 double-pole 	Lighting voltage (V)	Actuator color / printing	Housing color	7 A 250 V AC 5E4	16 (4) A 250 V AC 5E4	16 (4) A 250 V AC 1E4	10 (4) A 250 V AC 5E4	10 (4) A 250 V AC 25E3	10 A 12 V DC	20 mA 250 V AC 5E4	20 A 250 V AC 2 HP	20 A 125 V AC 1 HP	16 A 250 V AC 2 HP	16 A 125 V AC 1 HP	Terminal type	Terminal description	Contact material	EN 60335 cap. 30 conform "G"	Miscellaneous	Stock version
ON / OFF switch (DPST)																				
1555.3102	230					o	o				o	o	o			6.3	Ag	o		o
1555.3104	230					o	o						o			6.3	Ag			o
1555.3108	230					o	o						o			6.3	Ag			o
1555.3604	230					o	o						o			6.3	Ag		lower lying flange	
1555.4608	230					o	o						o				Ag		lower lying flange	
1555.8104	230					o	o						o			6.3	Ag		flange dimension 31.5 x 17 mm	
1555.3125	115					o	o				o	o	o			6.3	Ag	o		
1555.3109	110													o		6.3	Ag			
1555.3120	110													o		6.3	Ag			
1555.3111	12								o							6.3	Ag			
1552.0102						o	o						o	o			Ag			o
1552.2601						o	o						o	o			Ag		lower lying flange	
1552.2602						o	o						o	o			Ag	o	lower lying flange	o
1552.3102						o	o						o	o		6.3	Ag			o
1552.3104						o	o						o	o		6.3	Ag			
1552.3112						o	o						o	o		6.3	Ag	o	conformant with EN 60065 par. 14.6	o
1552.3117						o	o				o	o	o	o		6.3	Ag	o		
1552.3602						o	o						o	o		6.3	Ag		lower lying flange	o
1552.4602						o	o						o	o			Ag		lower lying flange	o
1552.4702						o	o						o	o			Ag		2 PCB holders lower lying flange	
1552.4802						o	o						o	o			Ag		lower lying flange	

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS


ECO

PUSH'N'DRIVE



SERIES 1550 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES


T0 16 (4) A 250 V AC

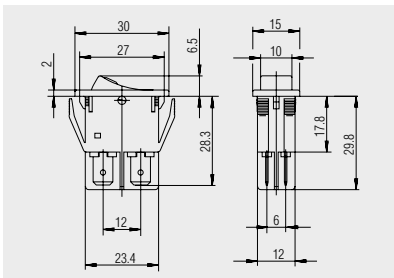

Basic types 1550 and 1555
single and double-pole




Quick-connect terminal 6.3 x 0.8



X = Wall thickness


x	y	z
0.8 ... 5.0	27.2 ± 0.1	12.2 ± 0.2

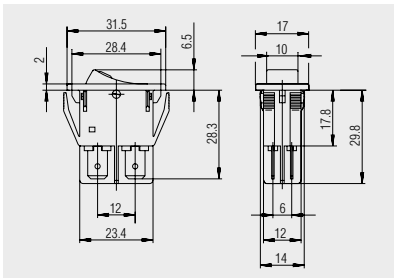

1555.8104
double-pole



Quick-connect terminal 6.3 x 0.8
cover frame 31.5 x 17 mm



X = Wall thickness

x	y	z
0.8 ... 5.0	28.6 ± 0.1	14 ± 0.2

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH 'N' DRIVE




SERIES 1550 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES


T0 16 (4) A 250 V AC




Basic types 1550 and 1555
lower lying flange
single and double-pole

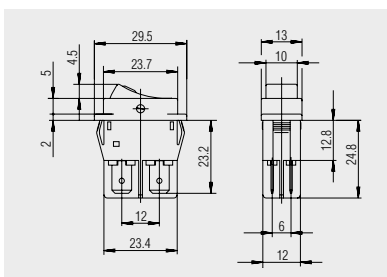

 Quick-connect terminal 6.3 x 0.8

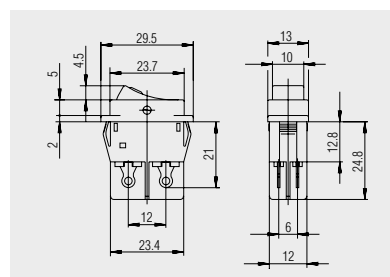

 Solder terminal




X = Wall thickness


x	y	z
0.75 ... 1.25	26.2 ^{-0.1}	12.4 ^{+0.1}
2 ... 3	26.8 ^{-0.1}	12.4 ^{+0.1}
2 ... 3	26.8 ^{-0.1}	12.4 ^{+0.1}
1.25 ... 2	26.4 ^{-0.1}	12.4 ^{+0.1}




Basic type 1551 and 1552
single and double-pole

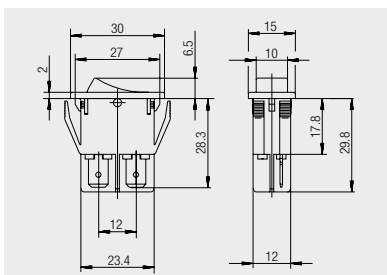

 Quick-connect terminal 6.3 x 0.8

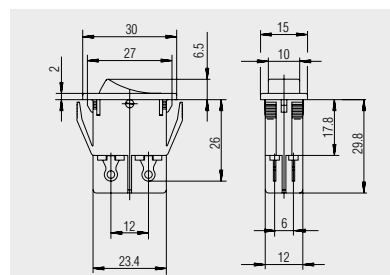

 Solder terminal



X = Wall thickness

x	y	z
0.8 ... 5.0	27.2 ^{+0.1}	12.2 ^{+0.2}




SERIES 1550 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 16 (4) A 250 V AC




Basic types 1551 and 1552
lower lying flange
single and double-pole




X = Wall thickness


x	y	z
0.75 ... 1.25	26.2 ^{-0.1}	12.4 ^{+0.1}
1.25 ... 2	26.4 ^{-0.1}	12.4 ^{+0.1}
2 ... 3	26.8 ^{-0.1}	12.4 ^{+0.1}

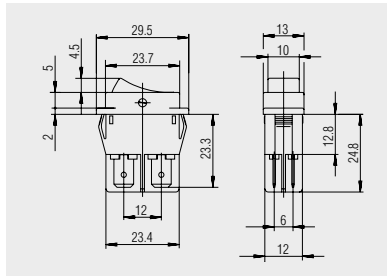


Quick-connect terminal 6.3 x 0.8

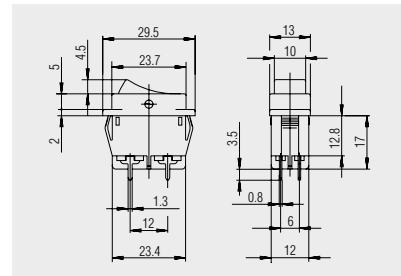

PCB terminal

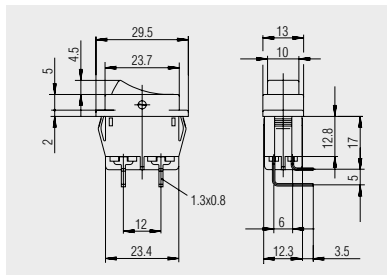


PCB terminal angled

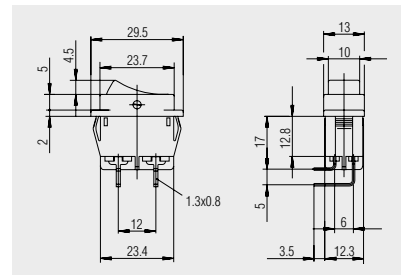

PCB terminal angled mirror-inverted



Dummy piece
203.103.013

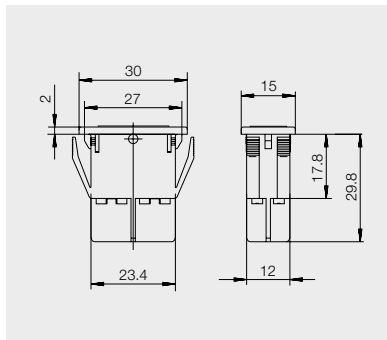

Dummy piece for series 1550 made of PA

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES





SENSORS

ECO

PUSH 'N' DRIVE

1	2	3	4
Empfohlener Ausschnitt für Rastbefestigung (Grat gegenüber Bestueckungsseite) recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	Wanddicke wall thickness		Ausschnittlänge length of cut-out
	0.8 to / bis 5.0		27.2 ±0.1
			Ausschnittbreite width of cut-out
			12.2 ±0.2

VERTRAULICH-CONFIDENTIAL
 © Alle Rechte bei Marquardt, auch fuer den Fall von Schutzrechtsverletzungen.
 Jede Verfuégungsbefugnis, wie Kopier- und Weitergaberecht, bei uns.
 © This document is the exclusive property of Marquardt. Without our consent, it may not be reproduced or given to third parties.

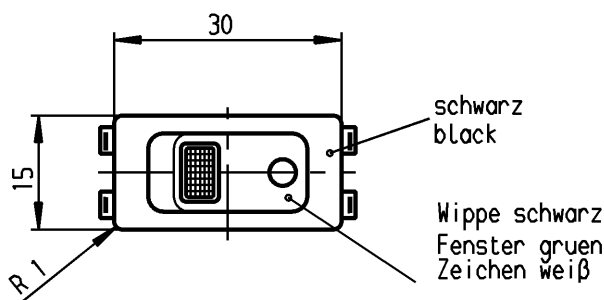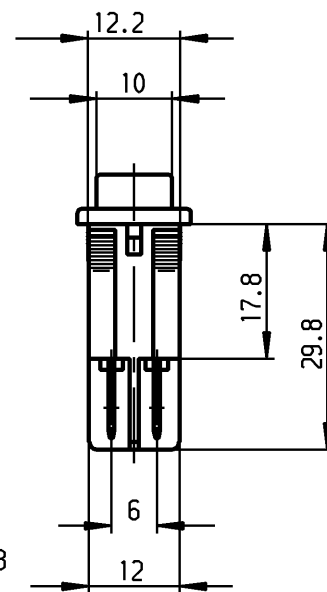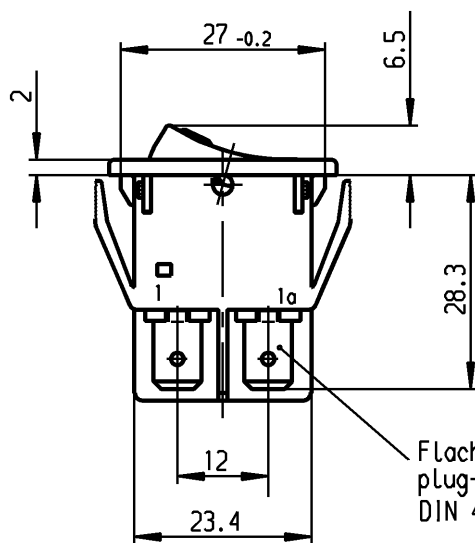

Aufschrift
Marking

Ⓜ
 155..
 16(4)/250 ~
 10(4)/250 ~ 5E4 T100/55
 5/100A 250V ~



16A 250V AC
 2 HP
 R145



Herstellort/-jahr/-woche
 nach DIN EN 60062
 code of manufacture:
 place/year/week
 acc. to DIN EN 60062

Ausschalter 2-polig

Glimmlampe mit R_V für 230 V ~


Fuer Geræte der Klasse II geeignet

DPST

neon lamp with R_V for 230V AC

suitable for appliances of class II

Diese Unterlage ist geistiges Eigentum der Firma Marquardt. Schutzvermerk nach DIN 34 beachten. Copyright reserved.

Für Form und Lage		Allgemeintoleranzen UNTOLERANCED DIMENSIONS		Pause COPY		Blatt SHEET 01		Typ K		Zeichn./DRAWING NO. 1555.3108		Index	
FOR SHAPE AND LOC.		PROJECTION		Abmasse und Nennmassbereiche Angaben in mm		Laengen LENGTH		Radien RADII		Original DIN A4		Maßstab SCALE 1:1	
Für Winkel FOR ANGLE ± 2°		ALL DIMENSIONS ARE IN MILLIMETRES		0-6 ± 0.2		>6-15 ± 0.4		± 0.2		0		10	
				>15-30 ± 0.4		>30-70 ±		±		20		30 mm	
				>70-120 ±		>120-200 ±							
c		35129		27.02.03 wj		g				CAD Medusa		Z	
b		23635		08.11.95 R5		f				gez./DRAWN BY 24.04.89 ZF			
a		21323		22.04.92 Mut		e				gepr./CHECKED BY Lr			
						d		69572		30.11.10 hhe			
Ausg. ISSUE		Änderung REVISION		gez. DRAWN BY		Ausg. ISSUE		Änderung REVISION		gez. DRAWN BY		Ersatz für/REPLACEMENT OF	
												MARQUARDT	
												Marquardt, D-78604 Rietheim-Weilheim	