




Marquardt GmbH
Schloss-Str. 16
78604 Rietheim-Weilheim

Germany
Phone
: +49 (0) 7424 / 99-0
Fax : +49 (0) 7424 / 99-2399

Net : www.marquardt.de
E-Mail : marquardt@marquardt.de

Product image / Drawings

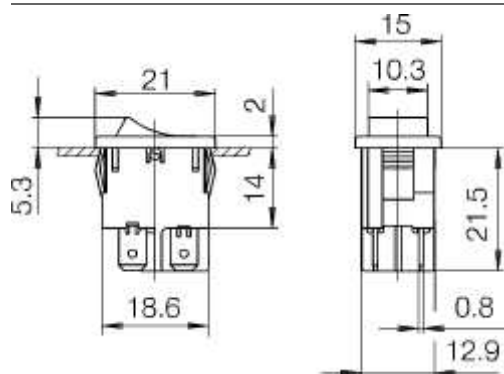

X = wall thickness

X	Y	Z
0.75 ... 1.25	19.2 -0.1	12.9 +0.1
1.25 ... 2	19.4 -0.1	12.9 +0.1
2 ... 3	19.8 -0.1	12.9 +0.1

Technical data

Product number	1852.1102
Business unit	Switches & Sensors
Product Manager	Mattes
Product family	Rocker switches
Actuation type	direct
Packing unit	300
ROHS conform	yes
Switching function	ON / OFF switch (DPST)
Material fixed contact	Ag
Number of poles	2-polig
connections	Quick-connect terminal, 4.8 x 0.8
Mechanical life endurance	5E4
Rating IEC	4 (1) A 250 V AC
Rating North America	4 A 250 V AC 1/10 HP 6 A 125 V AC 1/10 HP
Temperatures	Connection side max. 85 °C Actuation side max. 55 °C
Actuators and additional actuators	rocker: PA, black, identification red on top visible in OFF position
Housing description	housing: PA, black
Connection surface	bearing connection silver plated

	external connection	silver plated
Contact material	Ag	
Rating Code UL	R 52	
Contact type	lifting contact	
Approval marks	CSA / ENEC 05 / UL	
Suitable for appliances of protection class	II	
Additional labeling	year/week of manuf. acc. to DIN EN 60062	
Type of fastening	Snap fastening	
Stock version	●	