

## **General Description**

The MAX6800/MAX6801/MAX6802 microprocessor (µP) supervisory circuits monitor the power supplies in 2.85V to 5.0V µP and digital systems. They increase circuit reliability and reduce cost by eliminating external components and adjustments.

These devices perform a single function—they assert a reset signal whenever the VCC supply voltage declines below a preset threshold, keeping it asserted for a preset timeout period after VCC has risen above the reset threshold. The only difference among the three devices is their output. The MAX6801 (push/pull) and MAX6802 (open-drain) have an active-low RESET output, while the MAX6800 (push/pull) has an active-high RESET output. The MAX6800/MAX6801 are guaranteed to be in the correct state for VCC down to 0.7V. The MAX6802 is guaranteed to be in the correct state for VCC down to 1.0V.

The reset comparator in these ICs is designed to ignore fast transients on VCC. Reset thresholds are factorytrimmable between 2.63V and 4.80V, in approximately 100mV increments. These devices are available with a 1ms (min), 20ms (min), or 100ms (min) reset pulse width. Ideal for space-critical applications, the MAX6800/MAX6801/MAX6802 come packaged in a 3pin SOT23. For a lower threshold voltage version, see the MAX6332/MAX6333/MAX6334.

#### **Applications**

Computers

Controllers

Intelligent Instruments

Critical µP/µC Power Monitoring

Portable/Battery-Powered Equipment

Automotive

Typical Operating Circuit and Pin Configuration appear at end of data sheet.

Selector Guide appears at end of data sheet.

#### **Features**

- ♦ Ultra-Low 0.7V Operating Supply Voltage
- ♦ Low 4.0µA Supply Current
- ♦ Precision Monitoring of 2.85V to 5.0V Power-**Supply Voltages**
- ♦ Reset Thresholds Available from 2.63V to 4.80V, in Approximately 100mV Increments
- **♦** Fully Specified over Temperature
- **♦ Three Power-On Reset Timeout Periods Available** (1ms min, 20ms min, 100ms min)
- ♦ Low Cost
- ♦ Three Available Output Structures: Push/Pull RESET, Push/Pull RESET, Open-Drain RESET
- ♦ Guaranteed RESET/RESET Valid to V<sub>CC</sub> = 0.7V (MAX6800/MAX6801)
- **♦ Power-Supply Transient Immunity**
- ♦ No External Components Required
- ♦ 3-Pin SOT23 Package
- ♦ Pin Compatible with MAX809/MAX810, MAX6326/MAX6327/MAX6328, and MAX6346/MAX6347/MAX6348

## **Ordering Information**

PART*	TEMP RANGE	PIN-PACKAGE
MAX6800URDT	-40°C to +125°C	3 SOT23-3
MAX6801URDT	-40°C to +125°C	3 SOT23-3
MAX6802URDT	-40°C to +125°C	3 SOT23-3

\*These devices are available in factory-set VCC reset thresholds from 2.63V to 4.80V, in approximately 0.1V increments. Choose the desired reset threshold suffix from Table 1 and insert it in the blanks following "UR" in the part number. Factory-programmed reset timeout periods are also available. Insert the number corresponding to the desired nominal reset timeout period (1 = 1ms min, 2 = 20ms min, 3 = 100ms min) in the blank following "D" in the part number. There are 15 standard versions with a required order increment of 2500 pieces. Sample stock is generally held on the standard versions only (see Selector Guide). Contact the factory for availability of nonstandard versions (required order increment is 10,000 pieces). All devices available in tape-and-reel only.

Devices are available in both leaded and lead-free packaging. Specify lead-free by replacing "-T" with "+T" when ordering.

MIXIM

#### **ABSOLUTE MAXIMUM RATINGS**

Terminal Voltage (with respect to GND)	Co
V <sub>CC</sub> 0.3V to +6V	
Push/Pull RESET, RESET0.3V to (V <sub>CC</sub> + 0.3V)	Ор
Open-Drain RESET0.3V to +6V	Jur
Input Current (V <sub>CC</sub> )20mA	Sto
Output Current (RESET, RESET)20mA	Lea

Continuous Power Dissipation (TA = +70°C)	
3-Pin SOT23 (derate 4mW/°C above +70°C)	320mW
Operating Temperature Range40	°C to +125°C
Junction Temperature	+150°C
Storage Temperature Range65	°C to +150°C
Lead Temperature (soldering, 10s)	+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

#### **ELECTRICAL CHARACTERISTICS**

 $(V_{CC} = \text{full range}, T_A = -40^{\circ}\text{C to} + 125^{\circ}\text{C}, \text{ unless otherwise noted}. \text{Typical values are at } V_{CC} = +5.0\text{V} \text{ and } T_A = +25^{\circ}\text{C}, \text{ reset not asserted.})$  (Note 1)


PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS	
	Vcc	$T_A = 0^{\circ}C \text{ to } +125^{\circ}C$		MAX6800/MAX6801	0.7		5.5	V
Supply Voltage Range (Note 2)				MAX6802	1.0		5.5	
		$T_A = -40^{\circ}C \text{ to } +125^{\circ}C$		MAX6800/MAX6801	0.78		5.5	
				MAX6802	1.2		5.5	
Comments Comments	las	No load		$V_{CC} = +3.0V$		4	10	
Supply Current	Icc	NO load		$V_{CC} = +5.0V$		5	12	- μΑ
Reset Threshold	V=	MAX680_URDT, Table 1		T <sub>A</sub> = +25°C	V <sub>TH</sub> - 1.8%	V <sub>TH</sub>	V <sub>TH</sub> + 1.8%	- V
	V <sub>TH</sub>			$T_A = -40^{\circ}\text{C to} + 125^{\circ}\text{C}$	V <sub>TH</sub> - 3%	V <sub>TH</sub>	V <sub>TH</sub> + 3%	
V <sub>CC</sub> Falling Reset Delay		V <sub>CC</sub> falling at 10V/ms			30		μs	
		MAX680_URD1-T		1	1.5	2		
Reset Active Timeout Period	t <sub>RP</sub>	MAX680_URD2-T		20	30	40	ms	
		MAX680_URD3-T		100	150	200		
DECET Output I am Valta sa	V <sub>OL</sub>	Reset asserted ISINK	Isink =	$I_{SINK} = 50\mu A, V_{CC} \ge 1.0V$			0.4	
RESET Output Low Voltage (MAX6801/MAX6802)			$I_{SINK} = 1.2 \text{mA}, V_{CC} \ge 2.5 \text{V}$				0.3	V
(1111 01000 1711 010002)			Isink =	1.2mA, V <sub>CC</sub> ≥ 4.25V			0.4	
RESET Output High Voltage	VOH	Reset not ISOURC		$E = 500 \mu A, V_{CC} \ge 3.0 V$	0.8 x V <sub>CC</sub>			V
(MAX6801)	VOH	asserted	ISOURCE = 800µA, V <sub>CC</sub> ≥ 5.0V		0.8 x V <sub>C</sub> C			v
	Vон	Reset Isour	ISOURCE	$E = 1\mu A, V_{CC} \ge 1.0V$	0.8 x V <sub>C</sub> C	8 x V <sub>CC</sub>		
RESET Output Voltage (MAX6800)			ISOURCE = 200µA, V <sub>CC</sub> ≥ 1.8V		0.8 x V <sub>C</sub> C			<u> </u>
			ISOURCE	$E = 800\mu\text{A}, V_{CC} \ge 4.25\text{V}$	0.8 x V <sub>CC</sub>			V
	V <sub>OL</sub>			1.2mA, V <sub>CC</sub> ≥3.0V			0.3	
				3.2mA, V <sub>CC</sub> ≥5.0V			0.4	
RESET Output Leakage Current (MAX6802)		V <sub>CC</sub> > V <sub>TH</sub> , RESET not asserted					0.5	μА

Note 1: All parts are production tested at TA = +25°C. Overtemperature limits are guaranteed by design and not production tested.

**Note 2:** I<sub>SOURCE</sub> for the MAX6800 is I00nA. I<sub>SINK</sub> for the MAX6801 is 100nA. I<sub>SINK</sub> for the MAX6802 is 50µA.

## Typical Operating Characteristics

(Reset not asserted, T<sub>A</sub> = +25°C, unless otherwise noted.)

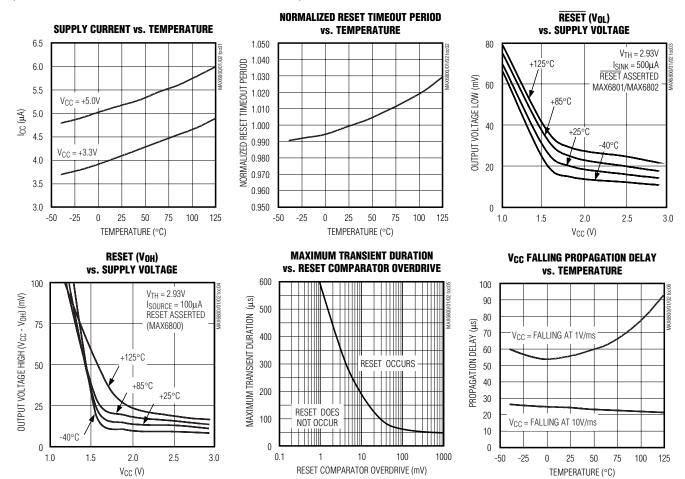

## **Pin Description**

Р	IN	NAME	FUNCTION	
MAX6800	MAX6801/ MAX6802	NAME	FUNCTION	
1	1	GND	Ground	
_	2	RESET	Active-Low Reset Output. RESET is asserted while V <sub>CC</sub> is below the reset threshold and remains asserted for a reset timeout period (t <sub>RP</sub> ) after V <sub>CC</sub> rises above the reset threshold. RESET on the MAX6801 is push/pull. RESET on the MAX6802 is open-drain.	
2	_	RESET	Active-High Reset Output. RESET is asserted while V <sub>CC</sub> is below the reset threshold and remains asserted for a reset timeout period (t <sub>RP</sub> ) after V <sub>CC</sub> rises above the reset threshold. RESET on the MAX6800 is push/pull.	
3	3	Vcc	Supply Voltage Input	

### **Applications Information**

#### Interfacing to µPs with Bidirectional Reset Pins

Since the  $\overline{\text{RESET}}$  output on the MAX6802 is open-drain, this device interfaces easily with  $\mu\text{Ps}$  that have bidirectional reset pins, such as the Motorola 68HC11. Connecting the  $\mu\text{P}$  supervisor's  $\overline{\text{RESET}}$  output directly to the microcontroller's ( $\mu\text{C}$ 's)  $\overline{\text{RESET}}$  pin with a single pullup resistor allows either device to assert reset (Figure 1).

#### **Negative-Going Vcc Transients**

In addition to issuing a reset to the  $\mu P$  during power-up, power-down, and brownout conditions, these devices are relatively immune to short-duration, negative-going VCC transients (glitches). The *Typical Operating Characteristics* show the Maximum Transient Duration vs. Reset Comparator Overdrive graph. The graph shows the maximum pulse width that a negative-going VCC transient may typically have without issuing a reset signal. As the amplitude of the transient increases, the maximum allowable pulse width decreases.




Figure 1. Interfacing to μPs with Bidirectional Reset Pins





Figure 2. Ensuring Reset Valid Down to  $V_{CC} = 0$ 

#### Pin Configuration

# TOP VIEW GND 1 MAXGROU MAX6800 MAX6802 3 Vcc SOT23-3 ( ) ARE FOR MAX6800

## \_Typical Operating Circuit



# Ensuring a Valid Reset Output Down to $V_{CC} = 0$

When V<sub>CC</sub> falls below 1V and approaches the minimum operating voltage of 0.7V, push/pull-structured reset sinking (or sourcing) capabilities decrease drastically. High-impedance CMOS-logic inputs connected to the RESET pin can drift to indeterminate voltages. This does not present a problem in most cases, since most  $\mu Ps$  and circuitry do not operate when V<sub>CC</sub> drops below 1V. For the MAX6801 application, where RESET must be valid down to 0, adding a pulldown resistor between RESET and GND removes stray leakage currents, holding RESET low (Figure 2a). The pulldown resistor value is not critical; 100k $\Omega$  is large enough not

to load  $\overline{\text{RESET}}$  and small enough to pull it low. For the MAX6800 application, where RESET must be valid to V<sub>CC</sub> = 0, a 100k $\Omega$  pullup resistor between RESET and V<sub>CC</sub> will hold RESET high when V<sub>CC</sub> falls below 0.7V (Figure 2b).

Since the MAX6802 has an open-drain, active-low output, it typically uses a pullup resistor. With this device, RESET will most likely not maintain an active condition, but will drift to a non-active level due to the pullup resistor and the reduced sinking capability of the open-drain device. Therefore, this device is not recommended for applications where the  $\overline{\text{RESET}}$  pin is required to be valid down to  $V_{CC}=0$ .

**Table 1. Factory-Trimmed Reset Thresholds** 

RESET THRESHOLD		T <sub>A</sub> = +25°C	T <sub>A</sub> = -40°C to +125°C		
SUFFIX	MIN	TYP (V <sub>TH</sub> )	MAX	MIN	MAX
48	4.714	4.80	4.886	4.656	4.944
47	4.615	4.70	4.785	4.559	4.841
46	4.547	4.63	4.713	4.491	4.769
45	4.419	4.50	4.581	4.365	4.635
44	4.301	4.38	4.459	4.249	4.511
43	4.223	4.30	4.377	4.171	4.429
42	4.124	4.20	4.276	4.074	4.326
41	4.026	4.10	4.174	3.977	4.223
40	3.928	4.00	4.072	3.880	4.120
39	4.830	3.90	3.970	3.783	4.017
38	3.732	3.80	3.868	3.686	3.914
37	3.633	3.70	3.767	3.589	3.811
36	3.535	3.60	3.665	3.492	3.708
35	3.437	3.50	3.563	3.395	3.605
34	3.339	3.40	3.461	3.298	3.502
33	3.241	3.30	3.359	3.201	3.399
32	3.142	3.20	3.258	3.104	3.296
31	3.025	3.08	3.135	2.988	3.172
30	2.946	3.00	3.054	2.910	3.090
29	2.877	2.93	2.983	2.842	3.018
28	2.750	2.80	2.850	2.716	2.884
27	2.651	2.70	2.749	2.619	2.781
26	2.583	2.63	2.677	2.551	2.709

## Selector Guide (Standard Versions\*)

PART	OUTPUT STAGE	NOMINAL V <sub>TH</sub> (V)	MIN RESET TIMEOUT (ms)	SOT TOP MARK
MAX6800UR26D3-T	Push/Pull RESET	2.63	100	FZIE
MAX6800UR29D3-T	Push/Pull RESET	2.93	100	FZIF
MAX6800UR31D3-T	Push/Pull RESET	3.08	100	FZIG
MAX6800UR44D3-T	Push/Pull RESET	4.38	100	FZIH
MAX6800UR46D3-T	Push/Pull RESET	4.63	100	FZII
MAX6801UR26D3-T	Push/Pull RESET	2.63	100	FZIK
MAX6801UR29D3-T	Push/Pull RESET	2.93	100	FZIM
MAX6801UR31D3-T	Push/Pull RESET	3.08	100	FZIN
MAX6801UR44D3-T	Push/Pull RESET	4.38	100	FZIO
MAX6801UR46D3-T	Push/Pull RESET	4.63	100	FZIP
MAX6802UR26D3-T	Open-Drain RESET	2.63	100	FZIQ
MAX6802UR29D3-T	Open-Drain RESET	2.93	100	FZIR
MAX6802UR31D3-T	Open-Drain RESET	3.08	100	FZIS
MAX6802UR44D3-T	Open-Drain RESET	4.38	100	FZIT
MAX6802UR46D3-T	Open-Drain RESET	4.63	100	FZIU

<sup>\*</sup>Sample stock is generally held on all standard versions.


\_Chip Information

TRANSISTOR COUNT: 505

PROCESS: BiCMOS

## **Package Information**

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to <a href="https://www.maxim-ic.com/packages">www.maxim-ic.com/packages</a>.)

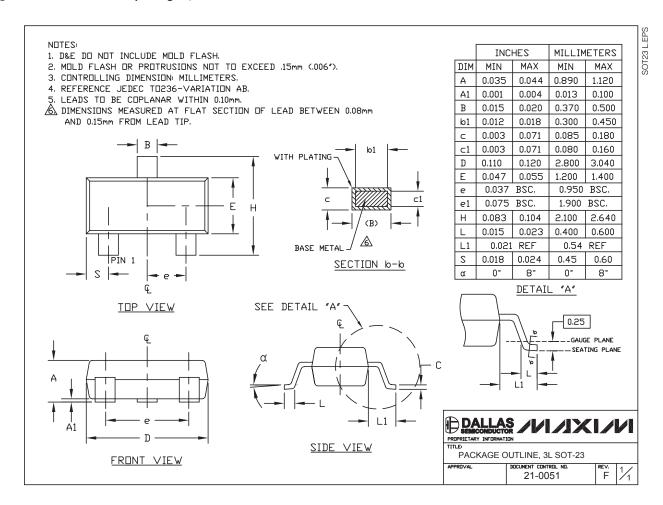

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.