

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242


The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 373182



■ Features :

- Universal AC input/Full range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- Isolation class II
- LED indicator for power on
- 100% full load burn-in test
- 3 years warranty



SPECIFICATION


MODEL		DR-30-5	DR-30-12	DR-30-15	DR-30-24
OUTPUT	DC VOLTAGE	5V	12V	15V	24V
	RATED CURRENT	3A	2A	2A	1.5A
	CURRENT RANGE	0 ~ 3A	0 ~ 2A	0 ~ 2A	0 ~ 1.5A
	RATED POWER	15W	24W	30W	36W
	RIPPLE & NOISE (max.) Note.2	80mVp-p	120mVp-p	120mVp-p	150mVp-p
	VOLTAGE ADJ. RANGE	4.75 ~ 5.5V	10.8 ~ 13.2V	13.5 ~ 16.5V	21.6 ~ 26.4V
	VOLTAGE TOLERANCE Note.3	±2.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±1.0%	±1.0%	±1.0%	±1.0%
	LOAD REGULATION	±1.0%	±1.0%	±1.0%	±1.0%
	SETUP, RISE TIME	100ms, 30ms/230VAC 100ms, 30ms/115VAC at full load			
	HOLD UP TIME (Typ.)	100ms/230VAC 21ms/115VAC at full load			
INPUT	VOLTAGE RANGE	85 ~ 264VAC 120 ~ 370VDC			
	FREQUENCY RANGE	47 ~ 63Hz			
	EFFICIENCY (Typ.)	74%	81%	82%	83%
	AC CURRENT (Typ.)	0.88A/115VAC 0.48A/230VAC			
	INRUSH CURRENT (Typ.)	COLD START 15A/115VAC 30A/230VAC			
PROTECTION	OVERLOAD	105 ~ 160% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed			
	OVER VOLTAGE	5.75 ~ 6.75V	13.8 ~ 16.2V	17.25 ~ 20.25V	27.6 ~ 32.4V
		Protection type : Shut down o/p voltage, re-power on to recover			
ENVIRONMENT	WORKING TEMP.	-20 ~ +60°C (Refer to output load derating curve)			
	WORKING HUMIDITY	20 ~ 90% RH non-condensing			
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH			
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)			
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6			
SAFETY & EMC (Note 4)	SAFETY STANDARDS	UL60950-1, TUV EN60950-1 approved, Design refer to EN50178			
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC			
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms/500VDC			
	EMI CONDUCTION & RADIATION	Compliance to EN55011, EN55022 (CISPR22) Class B			
	HARMONIC CURRENT	Compliance to EN61000-3-2, -3			
	EMS IMMUNITY	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, ENV50204, EN55024, EN61000-6-2, EN61204-3, heavy industry level, criteria A			
OTHERS	MTBF	441.5K hrs min. MIL-HDBK-217F (25°C)			
	DIMENSION	78*93*56mm (W*H*D)			
	PACKING	0.27Kg; 48pcs/14Kg/1.02CUFT			
NOTE		1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.			

Mechanical Specification


Case No. 918B Unit:mm

Terminal Pin No. Assignment


Pin No.	Assignment	Pin No.	Assignment
1	AC/N	5,6	-V
2	AC/L	7	LED
3,4	+V	8	+V ADJ.

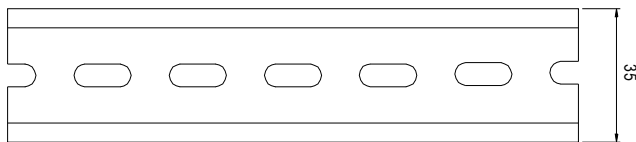


ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15

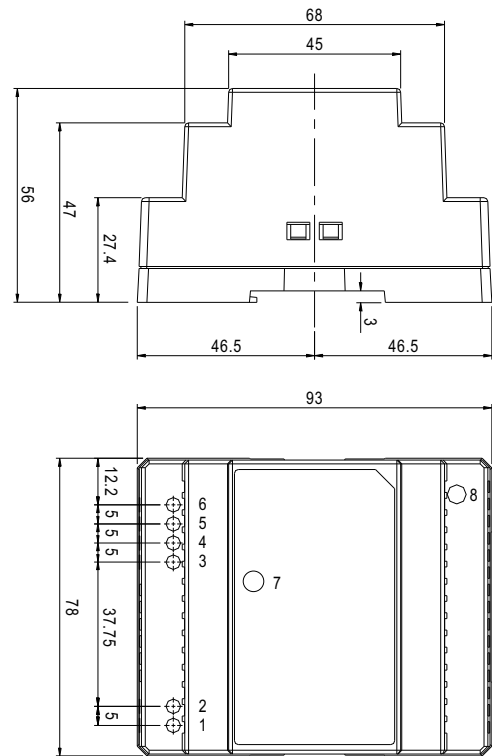


Block Diagram

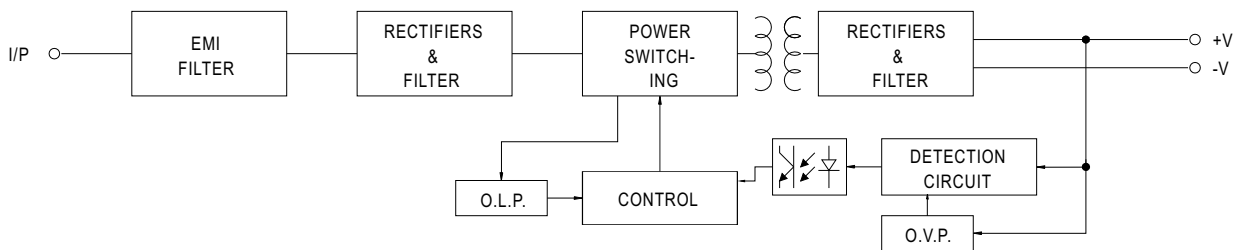

Derating Curve

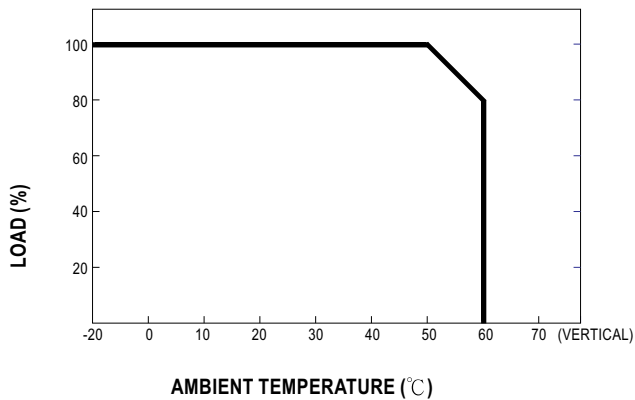

Output Derating VS Input Voltage

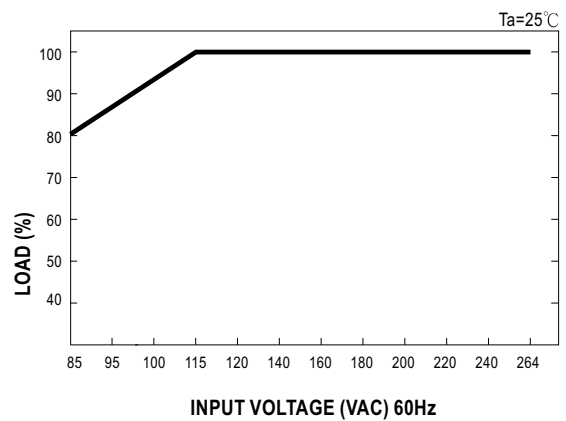

MODEL : DR-30-12

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	RIPPLE & NOISE	V1: 120 mVp-p (Max)	I/P: 230VAC O/P:FULL LOAD Ta:25℃	V1: 9 mVp-p (Max)	P
2	OUTPUT VOLTAGE ADJUST RANGE	CH1: 10.8 V~ 13.2V	I/P: 230 VAC I/P: 115 VAC O/P:MIN LOAD Ta:25℃	10.27 V~ 13.68 V/ 230 VAC 10.27 V~ 13.68 V/ 115 VAC	P
3	OUTPUT VOLTAGE TOLERANCE	V1: 1 %~ -1 % (Max)	I/P: 85 VAC / 264 VAC O/P:FULL/ MIN LOAD Ta:25℃	V1: 0.05 %~ -0.05 %	P
4	LINE REGULATION	V1: 1 %~ -1 % (Max)	I/P: 85VAC ~ 264 VAC O/P:FULL LOAD Ta:25℃	V1: 0 %~ 0 %	P
5	LOAD REGULATION	V1: 1 %~ -1 % (Max)	I/P: 230 VAC O/P:FULL ~MIN LOAD Ta:25℃	V1: 0.05 %~ -0.05 %	P
6	SET UP TIME	230VAC: 100 ms (Max) 115 VAC: 100 ms (Max)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25℃	230VAC/ 22 ms 115VAC/ 13 ms	P
7	RISE TIME	230VAC: 30 ms (Max) 115VAC: 30 ms (Max)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25℃	230VAC/ 22 ms 115VAC/ 15 ms	P
8	HOLD UP TIME	230VAC: 50 ms (TYP) 115VAC: 18 ms (TYP)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25℃	230VAC/ 185 ms 115VAC/ 38 ms	P
9	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230 VAC O/P:FULL LOAD Ta:25℃	TEST: <5 %	P
10	DYNAMIC LOAD	V1: 1200 mVp-p	I/P: 230 VAC O/P:FULL /Min LOAD 90%DUTY/1KHZ Ta:25℃	92 mVp-p	P

INPUT FUNCTION TEST

N O	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	INPUT VOLTAGE RANGE	85VAC~264 VAC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	63V~264V	P
			I/P: LOW-LINE-3V= 82 V HIGH-LINE+15%=300 V O/P: FULL/MIN LOAD ON: 30 Sec. OFF: 30 Sec 10MIN (AC POWER ON/OFF NO DAMAGE)	TEST: OK	
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE OSC	I/P: 85 VAC ~ 264 VAC O/P: FULL~MIN LOAD Ta: 25°C	TEST: OK	P
3	EFFICIENCY	81% (TYP)	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	83.9 %	P
4	INPUT CURRENT	230V/ 0.6 A (TYP) 115V/ 1.1 A (TYP)	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	I = 0.25 A/ 230 VAC I = 0.42 A/ 115 VAC	P
5	INRUSH CURRENT	230V/ 40 A (TYP) 115V/ 30 A (TYP) COLD START	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	I = 29 A/ 230 VAC I = 15 A/ 115 VAC	P

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	OVER LOAD PROTECTION	105 %~ 160 %	I/P: 230 VAC I/P: 115 VAC O/P: TESTING Ta: 25°C	126 %/ 230 VAC 145 %/ 115 VAC Fold back Current Limiting	P
2	OVER VOLTAGE PROTECTION	CH1: 13.8 V~ 16.2 V	I/P: 230 VAC I/P: 115 VAC O/P: MIN LOAD Ta: 25°C	15.3 V/ 230 VAC 15.3 V/ 115 VAC Shunt down Re- power ON	P
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264 VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Constant Current Limiting	P

ENVIRONMENT TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT																																																							
1	TEMPERATURE RISE TEST	MODEL : DR-30-24 1. ROOM AMBIENT BURN-IN : 1.5 HRS I/P: 230VAC O/P: FULL LOAD Ta= 24.7 °C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 52.1 °C <table><tr><th>NO</th><th>Position</th><th>P/N</th><th>ROOM AMBIENT Ta= 24.7 °C</th><th>HIGH AMBIENT Ta= 52.1 °C</th></tr><tr><td>1</td><td>LF1</td><td>LF-158</td><td>52.5°C</td><td>73.8°C</td></tr><tr><td>2</td><td>BD1</td><td>KBP208G 2A/800V</td><td>55.1°C</td><td>77.1°C</td></tr><tr><td>3</td><td>C5</td><td>180U/400V RUB 105°C</td><td>47.7°C</td><td>70.4°C</td></tr><tr><td>4</td><td>D1</td><td>EGP20J 2A/600V ZOW</td><td>63.4°C</td><td>86.2°C</td></tr><tr><td>5</td><td>Q1</td><td>K2545 6A/600V TOS</td><td>55.5°C</td><td>79.1°C</td></tr><tr><td>6</td><td>T1 COIL</td><td>TF-1225</td><td>61.3°C</td><td>84.2°C</td></tr><tr><td>7</td><td>SCR1</td><td>TYN408G ST</td><td>57.1°C</td><td>79.3°C</td></tr><tr><td>8</td><td>D100</td><td>FMX-12S 10A/200V</td><td>56.4°C</td><td>78.0°C</td></tr><tr><td>9</td><td>C105</td><td>330U/35V NCC 105°C KY</td><td>47.8°C</td><td>70.1°C</td></tr><tr><td>10</td><td>R115</td><td>1.2K/2W RMO</td><td>75.6°C</td><td>97.3°C</td></tr></table>			NO	Position	P/N	ROOM AMBIENT Ta= 24.7 °C	HIGH AMBIENT Ta= 52.1 °C	1	LF1	LF-158	52.5°C	73.8°C	2	BD1	KBP208G 2A/800V	55.1°C	77.1°C	3	C5	180U/400V RUB 105°C	47.7°C	70.4°C	4	D1	EGP20J 2A/600V ZOW	63.4°C	86.2°C	5	Q1	K2545 6A/600V TOS	55.5°C	79.1°C	6	T1 COIL	TF-1225	61.3°C	84.2°C	7	SCR1	TYN408G ST	57.1°C	79.3°C	8	D100	FMX-12S 10A/200V	56.4°C	78.0°C	9	C105	330U/35V NCC 105°C KY	47.8°C	70.1°C	10	R115	1.2K/2W RMO	75.6°C	97.3°C	P
NO	Position	P/N	ROOM AMBIENT Ta= 24.7 °C	HIGH AMBIENT Ta= 52.1 °C																																																								
1	LF1	LF-158	52.5°C	73.8°C																																																								
2	BD1	KBP208G 2A/800V	55.1°C	77.1°C																																																								
3	C5	180U/400V RUB 105°C	47.7°C	70.4°C																																																								
4	D1	EGP20J 2A/600V ZOW	63.4°C	86.2°C																																																								
5	Q1	K2545 6A/600V TOS	55.5°C	79.1°C																																																								
6	T1 COIL	TF-1225	61.3°C	84.2°C																																																								
7	SCR1	TYN408G ST	57.1°C	79.3°C																																																								
8	D100	FMX-12S 10A/200V	56.4°C	78.0°C																																																								
9	C105	330U/35V NCC 105°C KY	47.8°C	70.1°C																																																								
10	R115	1.2K/2W RMO	75.6°C	97.3°C																																																								
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P: 230 VAC O/P: 120 % LOAD Ta:25°C	TEST : OK	P																																																							
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 230 VAC O/P: 100 % LOAD Ta= -20 °C	TEST : OK	P																																																							
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50°C NO DAMAGE	I/P: 272 VAC O/P:FULL LOAD Ta= 50°C HUMIDITY= 95 %R.H	TEST : OK	P																																																							
5	TEMPERATURE COEFFICIENT	± 0.03 %(0~50°C)	I/P: 230 VAC O/P:FULL LOAD	± 0.01 %(0~50°C)	P																																																							
6	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency:10~500Hz (3) Sweep Time:10min/sweep cycle (4) Acceleration:2G (5) Test Time:1 hour in each axis (X.Y.Z) (6) Ta:25°C		TEST : OK	P																																																							

SAFETY TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	WITHSTAND VOLTAGE	I/P-O/P: 3 KVAC/min	I/P-O/P: 3.6 KVAC/min Ta:25℃	I/P-O/P: 1 mA NO DAMAGE	P
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ	I/P-O/P: 500 VDC Ta:25℃	I/P-O/P: 15 GΩ NO DAMAGE	P
3	APPROVAL	TUV: Certificate NO : R50058736 UL: File NO : E183223			P

E.M.C TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	HARMONIC	EN61000-3-2 CLASS A	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25℃	PASS	P
2	CONDUCTION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL/50% LOAD Ta:25℃	PASS Test by certified Lab	P
3	RADIATION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25℃	PASS Test by certified Lab	P
4	E.S.D	EN61000-4-2 INDUSTRY AIR:8KV / Contact:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25℃	CRITERIA A	P
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25℃	CRITERIA A	P
6	SURGE	IEC61000-4-5 INDUSTRY L-N :2KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25℃	CRITERIA A	P
7	Test by certified Lab & Test Report Prepare				

M.T.B.F & LIFE CYCLE CALCULATION

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT I/P: 230VAC O/P:FULL LOAD Ta= 25 °C LIFE TIME= 388877 HRS I/P: 230VAC O/P:FULL LOAD Ta= 50 °C LIFE TIME= 97916 HRS			P
2	MTBF	MIL-HDBK-217F NOTICES2 PARTS COUNT TOTAL FAILURE RATE: 441.5K HRS			P

COMPONENT STRESS TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	Power Transistor (D to S) or (C to E) Peak Voltage	Q 1 Rated K2545 : 600 V 6A	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on (2) Full Load (3)Output Short Ta:25℃	(1) 506 V (2) 512 V (3) 428 V	P
2	Diode Peak Voltage	D100 Rated YG805C10 : 100 V 20 A	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on (2) Full Load (3)Output Short Ta:25℃	(1) 68 V (2) 69 V (3) 56 V	P
3	Clamp Diode Peak Voltage	D1 Rated EGP20J : 600V 2A	I/P:High-Line +3V = 267 V O/P: (1)Full Load (2) Dynamic Load 90%Duty/1KHz Ta:25℃	(1) 492 V (2) 490 V	P
4	Input Capacitor Voltage	C 5 Rated : 100u / 400 V/ 105℃	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta:25℃	(1) 382 V (2) 382 V (3) 382 V	P

DATE	SAMPLE	TEST RESULT	TESTER	APPROVAL
2005/1/6	RD SAMPLE	PASS	VINCENT TSENG	MAX LIN
2005/4/11	PRODUCT SAMPLE W0503B01	PASS	VINCENT TSENG	MAX LIN
	PRODUCT SAMPLE W0505A01	PASS	VINCENT TSENG	MAX LIN

2003/12/12 A50-F023