



600W Single Output with PFC Function

**HRP-600N** series



AS/NZS 62368.1 UL62368-1

EN62368-1

TPTC004

IEC62368-1



## Applications

- Industrial automation machinery
- Industrial control system
- Mechanical and electrical equipment
- Diagnostic or biological facilities
- Test or measurement systems
- Telecommunication equipment

## Features

- Universal AC input / Full range
- Built-in active PFC function, PF>0.94
- 200% peak power capability
- High efficiency up to 89%
- Withstand 300VAC surge input for 5 seconds
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Built-in cooling fan ON-OFF control
- Built-in DC OK signal
- Built-in remote sense function
- 5 years warranty

## Description

HRP-600N is a 600W single output type AC/DC power supply. This series operates for 85~264VAC input voltage and offers the models with the DC output mostly demanded from the industry. Each model is cooled by the built-in fan with fan ON-OFF control, working for the temperature up to 70°C. Moreover, HRP-600N provides 200% short-duration peak power for motor applications and electromechanical loads requiring much higher power during start-up.

## Model Encoding

**HRP - 600N - 24**

Output voltage(12/24/36/48V)

Rated wattage

Series name




600W Single Output with PFC Function


**HRP-600N series****SPECIFICATION**

MODEL		HRP-600N-12		HRP-600N-24		HRP-600N-36		HRP-600N-48	
OUTPUT	DC VOLTAGE	12V		24V		36V		48V	
	RATED CURRENT	53A		27A		17.5A		13A	
	CURRENT RANGE	0 ~ 53A		0 ~ 27A		0 ~ 17.5A		0 ~ 13A	
	RATED POWER	636W		648W		630W		624W	
	RIPPLE & NOISE (max.) <small>Note.2</small>	200mVp-p		150mVp-p		200mVp-p		240mVp-p	
	VOLTAGE ADJ. RANGE	10.2 ~ 13.8V		21.6 ~ 28.8V		28.8 ~ 39.6V		40.8 ~ 55.2V	
	VOLTAGE TOLERANCE <small>Note.3</small>	± 1.0%		± 1.0%		± 1.0%		± 1.0%	
	LINE REGULATION	± 0.3%		± 0.2%		± 0.2%		± 0.2%	
	LOAD REGULATION	± 0.5%		± 0.5%		± 0.5%		± 0.5%	
	SETUP, RISE TIME	1800ms, 50ms/230VAC		3600ms, 50ms/115VAC at full load					
	HOLD UP TIME (Typ.)	16ms/230VAC		16ms/115VAC at full load					
INPUT	VOLTAGE RANGE <small>Note.4</small>	85 ~ 264VAC		120 ~ 370VDC					
	FREQUENCY RANGE	47 ~ 63Hz							
	POWER FACTOR (Typ.)	PF>0.94/230VAC		PF>0.98/115VAC at full load					
	EFFICIENCY (Typ.)	88%		88%		89%		89%	
	AC CURRENT (Typ.)	7.6A/115VAC		3.6A/230VAC					
	INRUSH CURRENT (Typ.)	35A/115VAC		70A/230VAC					
	LEAKAGE CURRENT	<1.5mA / 240VAC							
PROTECTION	OVERLOAD	Normally works within 105 ~ 200% rated output power for more than 5 seconds and then shut down o/p voltage, re-power on to recover							
		Constant current limiting for output power >220% rated for more than 5 seconds and then shut down o/p voltage, re-power on to recover							
	OVER VOLTAGE	14.4 ~ 16.8V		30 ~ 34.8V		41.4 ~ 48.6V		57.6 ~ 67.2V	
		Protection type : Shut down o/p voltage, re-power on to recover							
FUNCTION	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down							
	DC OK SIGNAL	PSU turn on : 3.3 ~ 5.6V ; PSU turn off : 0 ~ 1V							
ENVIRONMENT	FAN CONTROL (Typ.)	Load 35±15% or RTH2≥50℃ Fan on							
	WORKING TEMP.	-40 ~ +70℃ (Refer to "Derating Curve")							
	WORKING HUMIDITY	20 ~ 90% RH non-condensing							
	STORAGE TEMP., HUMIDITY	-40 ~ +85℃, 10 ~ 95% RH non-condensing							
	TEMP. COEFFICIENT	±0.03%/℃ (0 ~ 50℃)							
	VIBRATION	10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes							
	OPERATING ALTITUDE <small>Note.6</small>	5000 meters							
SAFETY & EMC (Note 5)	SAFETY STANDARDS	UL62368-1, TUV EN62368-1, EAC TP TC 004, AS/NZS 62368.1 approved							
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC							
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH							
	EMC EMISSION	Parameter	Standard				Test Level / Note		
		Conducted	EN55032				Class B		
		Radiated	EN55032				Class B		
		Harmonic current	EN61000-3-2				Class A		
		Voltage Flicker	EN61000-3-3				-----		
	EMC IMMUNITY	EN55035 , EN61000-6-2(EN50082-2)							
		Parameter	Standard				Test Level / Note		
		ESD	EN61000-4-2				Level 3, 8KV air; Level 2, 4KV contact		
		RF field	EN61000-4-3				Level 3, 10V/m		
		EFT/ Burst	EN61000-4-4				Level 3, 2KV		
		Surge	EN61000-4-5				Level 4, 4KV/Line-FG; 2KV/Line-Line		
		Conducted	EN61000-4-6				Level 3, 10V		
Magnetic Field		EN61000-4-8				Level 4, 30A/m			
Voltage Dips and Interruptions		EN61000-4-11				95% dip 0.5 periods, 30% dip 25 periods, 95% interruptions 250 periods			
OTHERS	MTBF	452.04K hrs min. Telcordia TR/SR-332 (Bellcore) ; 191.26K hrs min. MIL-HDBK-217F (25℃)							
	DIMENSION	218*105*61.5mm (L*W*H)							
	PACKING	1.39Kg;8pcs/12.1Kg/1.58CUFT							
NOTE	<div>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature.</div> <div>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</div> <div>3. Tolerance : includes set up tolerance, line regulation and load regulation.</div> <div>4. Derating may be needed under low input voltages. Please check the derating curve for more details.</div> <div>5. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="http://www.meanwell.com">http://www.meanwell.com</a>)</div> <div>6. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft).</div> <div>※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a></div>								


## Block Diagram

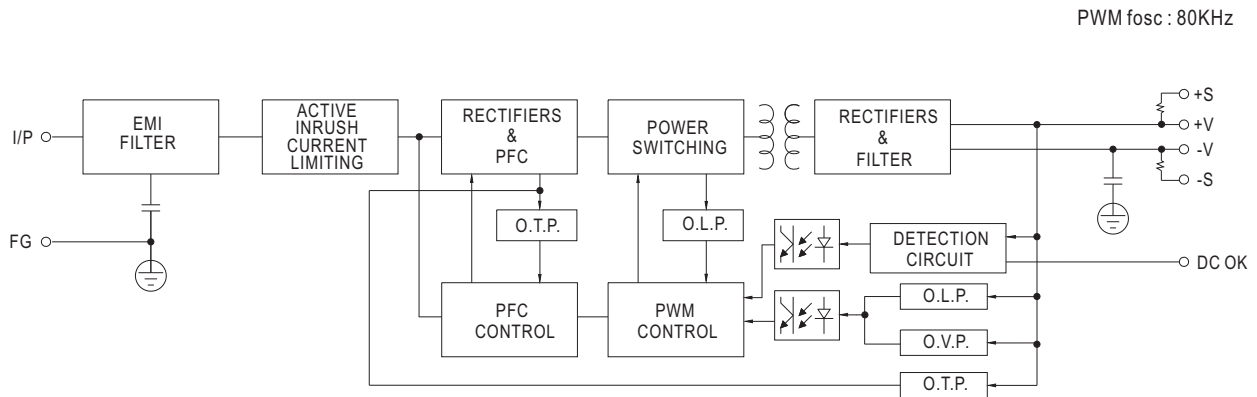

## Derating Curve

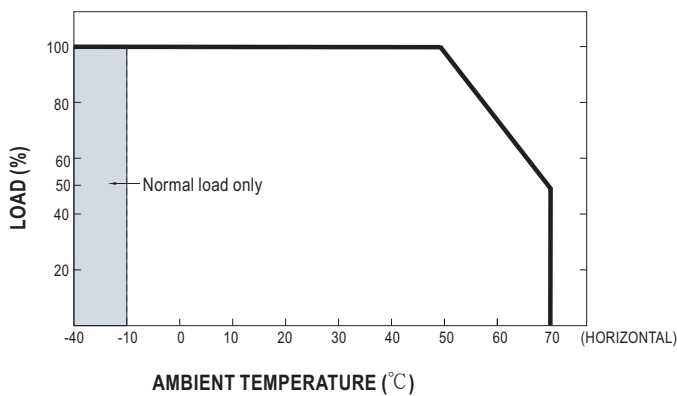

## Output Derating VS Input Voltage

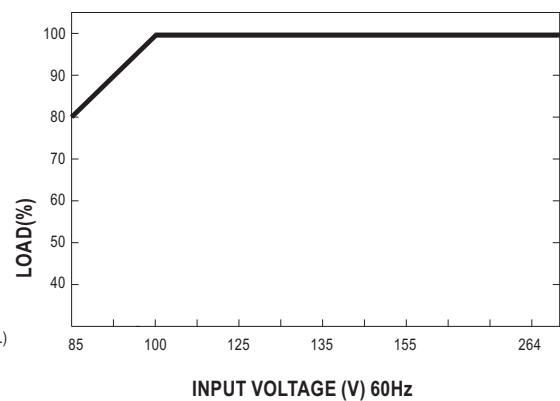

## Function Manual

### 1.Remote Sense

The remote sensing compensates voltage drop on the load wiring up to 0.5V.

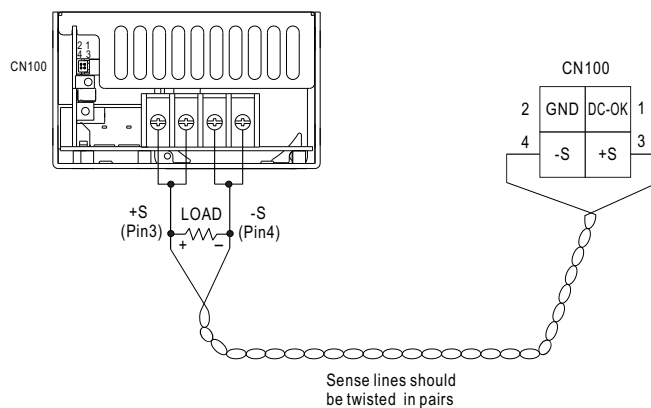


Fig 1.1

## 2.DC-OK Signal

DC-OK signal is a TTL level signal. High when PSU turns on.

Between DC-OK(pin3) and GND(pin5)	Output Status
3.3 ~ 5.6V	ON
0 ~ 1V	OFF

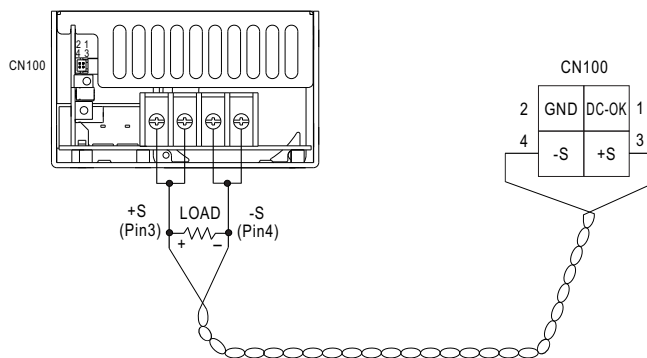


Fig 2.1

Sense lines should be twisted in pairs

## 3.Peak Power

$$P_{av} = \frac{P_{pk} \times t + P_{npk} \times (T-t)}{T} \leq P_{rated}$$

$$\text{Duty} \frac{t}{T} \times 100\% \leq 35\%$$

$$t \leq 5 \text{ sec}$$

$P_{av}$  : Average output power (W)



$P_{pk}$  : Peak output power (W)

$P_{npk}$  : Non-peak output power(W)

$P_{rated}$  : Rated output power(W)

$t$  : Peak power width(sec)

$T$  : Period(sec)

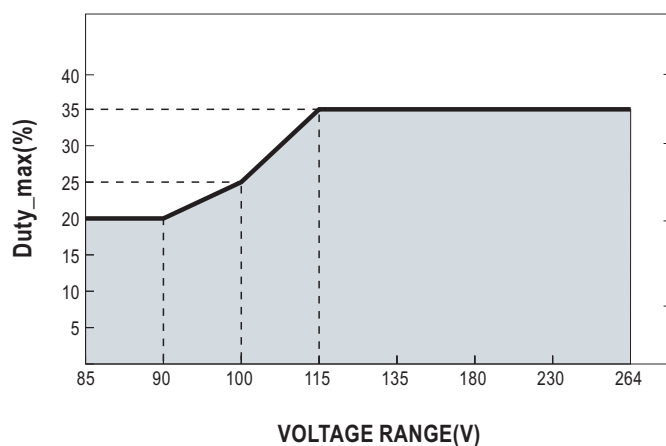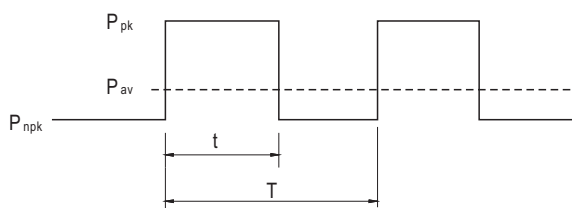

**For example (12V model) :**

$V_{in} = 100V$      $\text{Duty\_max} = 25\%$

$P_{av} = P_{rated} = 636W$

$P_{pk} = 200\% P_{rated} = 1272W$

$t \leq 5 \text{ sec}$


$T \geq 20 \text{ sec}$

$$P_{av} = \frac{P_{pk} \times t + P_{npk} \times (T-t)}{T} = \frac{1272 \times 5 + P_{npk} (20-5)}{20} \leq 636W$$

$$P_{npk} \leq 424W$$

Case No. 977A Unit:mm

## Mechanical Specification

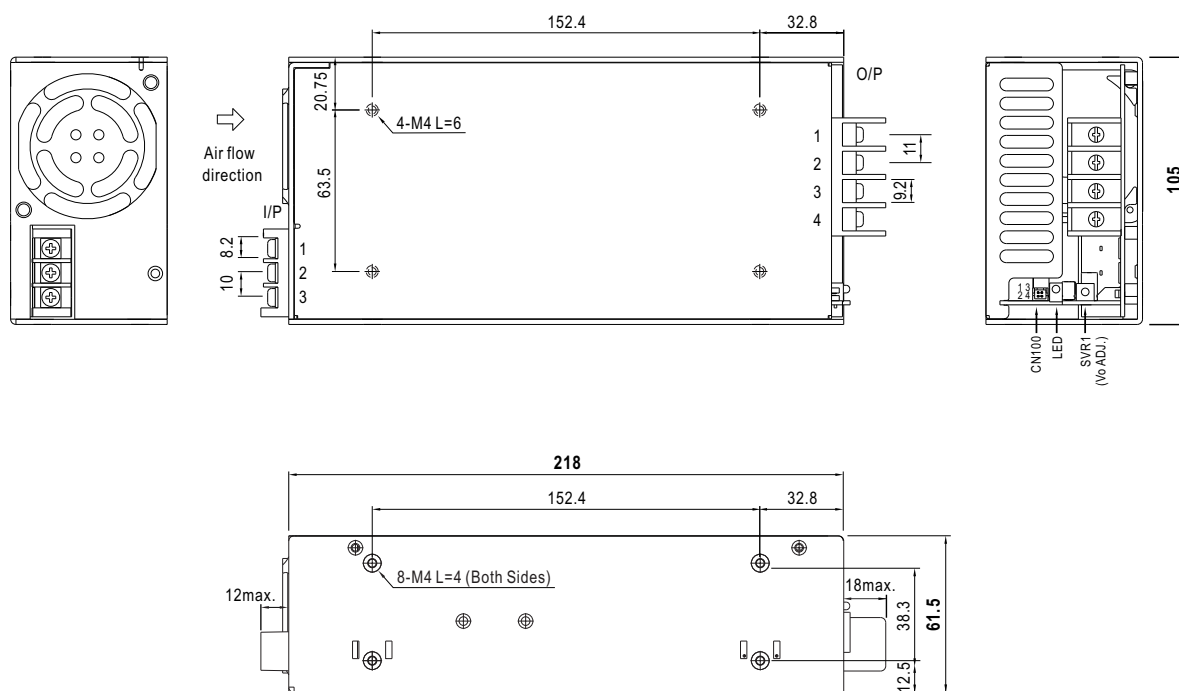

AC Input Terminal Pin No. Assignment

Pin No.	Assignment
1	AC/L
2	AC/N
3	FG $\perp$

DC Output Terminal Pin No. Assignment

Pin No.	Assignment
1~2	-V
3~4	+V

Connector Pin No. Assignment(CN100) : HRS DF11-4DP-2DS or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	DC-OK	HRS DF11-4DS or equivalent	HRS DF11-**SC or equivalent
2	GND		
3	+S		
4	-S		

## Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>