

B1232 series

Size: (120 x 120 x 32 mm)
4.7 x 4.7 x 1.24 inches



Construction: UL94V-0 PBT impeller & frame

Bearing option: ball bearing or sleeve

Connection: AWG 24, UL1007 lead wires

Protection: thermal

Options: tachometer output or
locked rotor alarm signal

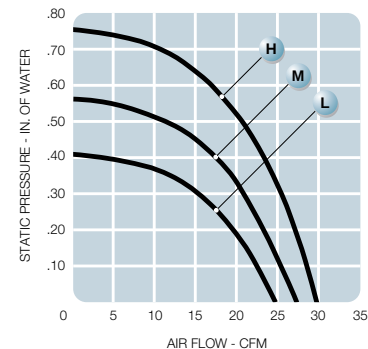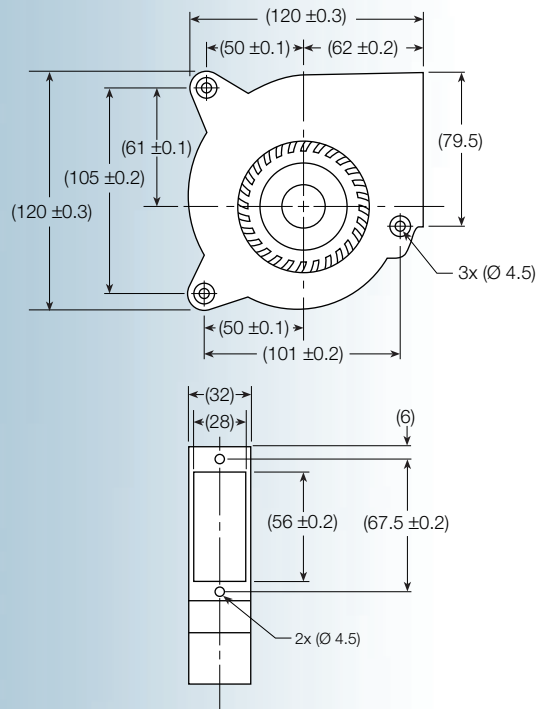

Model No.	Rated Voltage V	Current mA		Revolution RPM	Air Volume		Max Static Pressure (H ₂ O)		Sound Noise dBA	Weight oz
		12	24		M ³ /Min	CFM	MM	INCH		
B1232L	12/24	360	180	2,100	0.70	25	10.25	0.41	44	7.42
B1232M	12/24	550	330	2,400	0.76	27	14.00	0.56	47	7.42
B1232H	12/24	800	480	2,800	0.84	30	19.00	0.76	51	7.42