



multimec® 3F + 1K + 2K

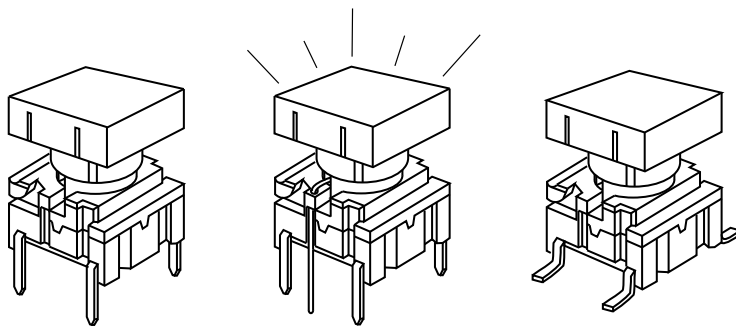


Technical Data:

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
low temp: -40/+65°C
high temp: -40/+160°C


Dimensions (through-hole)




PCB layout




Dimensions (w/LED)




PCB layout (top view)

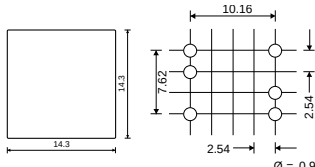



Dimensions (SMD)



PCB layout



Dimensions (Bezel) (Optional)



HOW TO ORDER

3 F	□	□ □	+	1 K 1 6	+	2 K □ □
Switch	Mounting	L 6 low temp. H 9 high temp.		Cap		Bezel
	T through-hole S surface mount					
				00 blue 02 green 03 grey 04 yellow 06 white 08 red 09 black		03 grey 06 white 08 red 09 black

Standard versions:

3FTL6
3FTH9
3FSH9

3 F	T	□ □	+	1 K 1 1 1 6	+	2 K □ □
Switch	Mounting	L 6 low temp. H 9 high temp.		Cap transparent		Bezel
	T through-hole					
				LED 22 green 44 yellow 88 red		03 grey 06 white 08 red 09 black

Standard versions:

3FTL622
3FTL644
3FTL688

Ordering example: 3FTL680 + 1K1116