


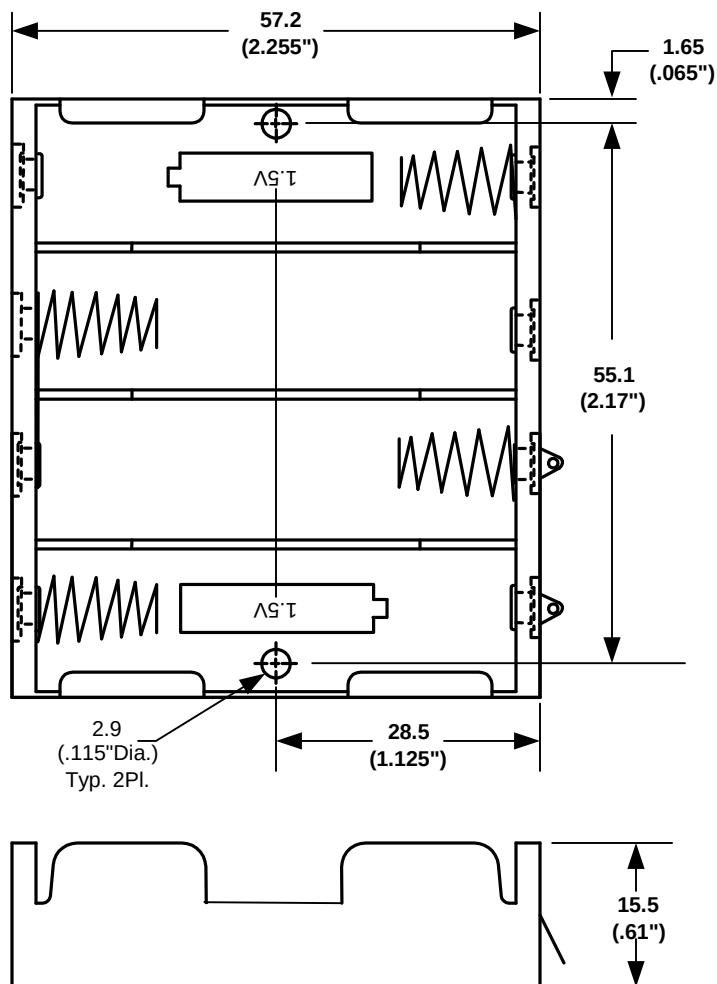

SOLDER LUGS SHOWN ABOVE


ORDERING CODE BC4AA

SOLDER LUGS = L
(6") WIRE LEADS = W
9 VOLT TYPE SNAPS = SF

DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
4/15/06	A	ADDED "ROHS COMPLIANT" UPDATED MATERIAL NOTE	T.B.	B.S.	

SPECIFICATIONS :

Plastic material - polypropylene, PP-1040
 Flammability rating-UL94 HB, UL file no. E216959
 Temperature Range: -10°C to +100°C
 Springs - nickel plated spring steel Wire - 152.4 mm
 Ref.Long 26 AWG, UL1007, CSA - TR-64, 300V,
 80°C.
 Rivets - Brass, nickel plated
 9 Volts Snaps - Brass, nickel plated
 Contact resistance: Under 50m Ω for +/- contacts per
 EIA-540J000
 ROHS COMPLAINT

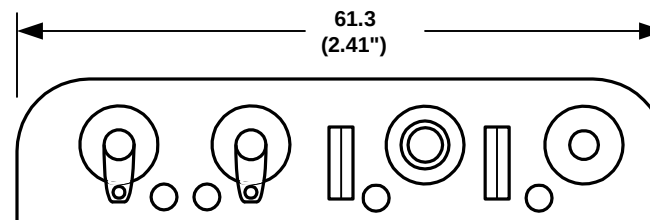

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL			
+ .5 (.020")		SCALE NONE	DRAWN BY S.C.
- .8 (.030")			APPROVED BY
FRACTIONAL	TITLE	FOUR "AA" CELL HOLDER	
+ .8 (.030")			
ANGULAR	DATE	DRAWING NUMBER	
+ 3°	4/15/2006	BC4AAL	
-			