
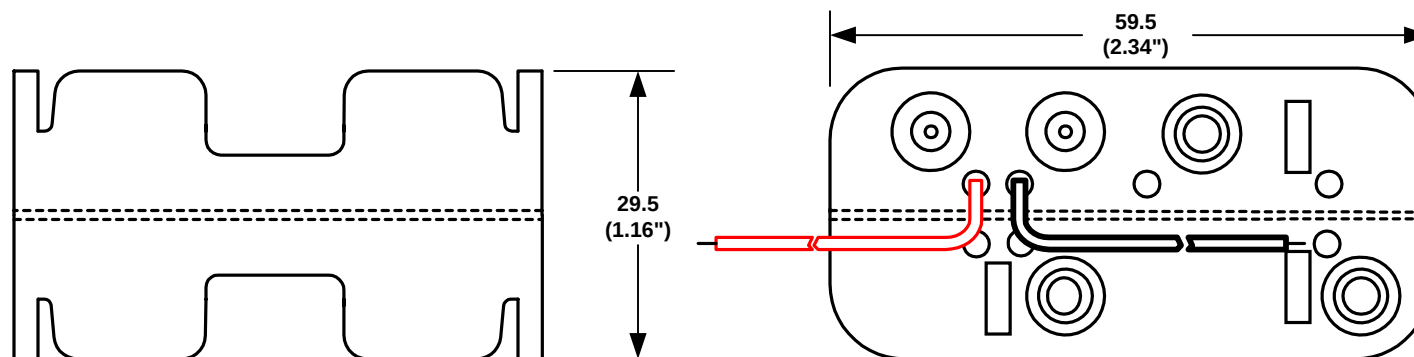


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

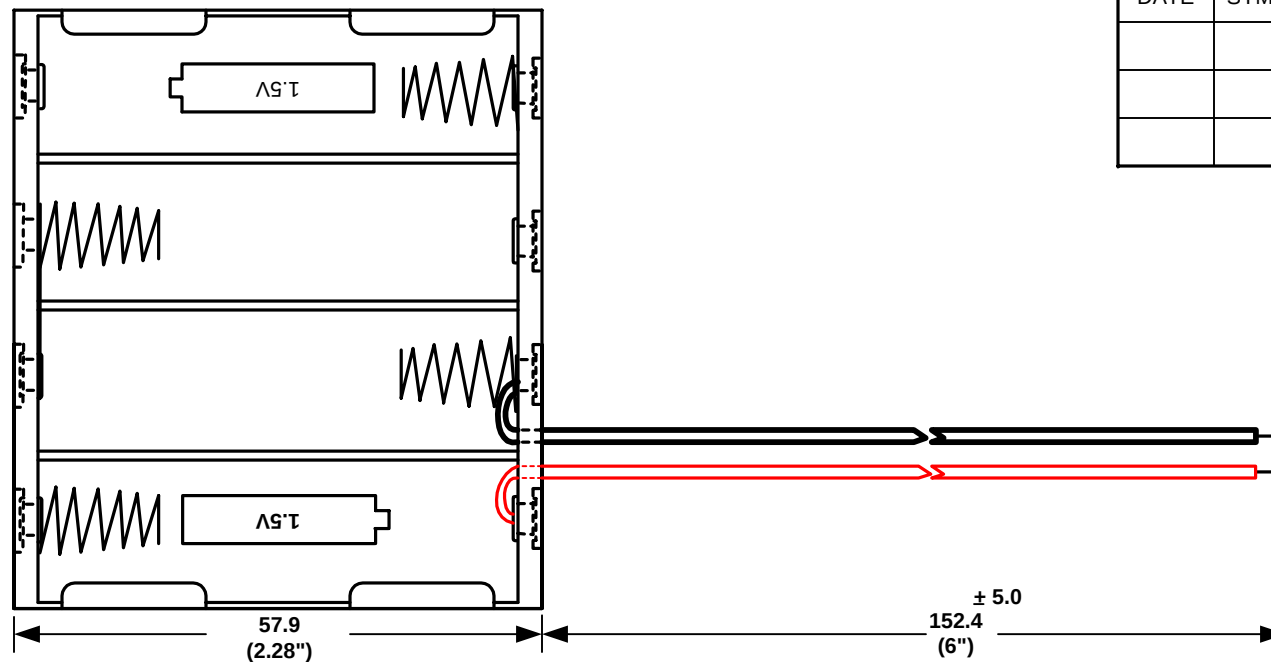

WIRE LEADS SHOWN ABOVE

ORDERING CODE BH48AA

SOLDER LUGS = L
(6") WIRE LEADS = W
9 VOLT TYPE SNAPS =SF

SPECIFICATIONS :

Plastic material - polypropylene
Springs - nickel plated spring steel
Wire - 152.4 mm Ref.Long 26 AWG,
UL1007, CSA - TR-64, 300V, 80°C.
Rivets - Brass, nickel plated
9 Volts Snaps - Brass, nickel plated

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL		SCALE	DRAWN BY S.C.
+ .5 (.020")		NONE	APPROVED BY
FRACTIONAL	TITLE	EIGHT "AA" CELL HOLDER	
+ .8 (.030")			
ANGULAR	DATE	DRAWING NUMBER	
+ 3°	03/13/2001	BH48AAW	
-			