




US

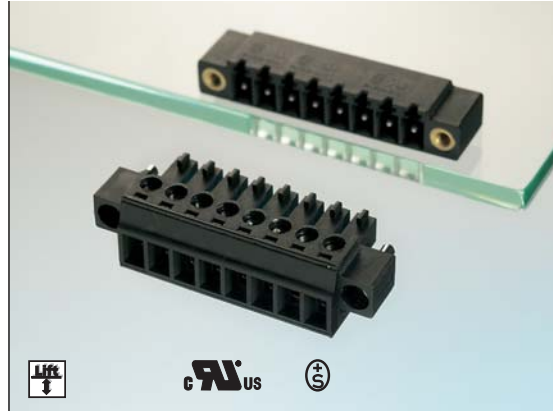

US

Headers

to Type 369

Type 190 page 124

Type 191 page 122

Type 382 page 124

Type 383 page 122

to Type 379

Type 392 page 125

Type 393 page 123

Type 369

Screw type terminal block, pluggable, centerline 3.81 mm / 0.150 inches, wire entry parallel to plug direction, lift system, contact system with integrated wire protection

Technical Data

US V / A / AWG 300 / 8 / 28 - 16

0.08 - 1.5 mm² 160 V / 2.5 kV / 8 A

Insulation co-ordination according to EN 60664-1

Clearance and creepage distances min. 3.5 mm

Insulating material class CTI 600

Overvoltage category III III II

Pollution degree 3 2 2

Rated voltage 250 630 630

Rated test voltage 2.5 6 4

Protection category according to IEC 529 IP20

Tightening torque UL 2.2 lb-in max.


Min. insul. strip length 7 mm

Pole size 2 - 24

Color black

Dimensions in mm

1 mm = 0.0394 in.

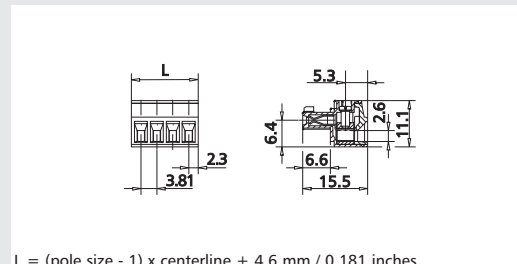

L = (pole size - 1) x centerline + 4.6 mm / 0.181 inches

Part numbers (P/N)

(information: page 56)

Complete the part number by adding the pole size.

Type 369

centerline 3.81 mm / 0.150 inches

P/N 313691

	02	03	04	05	06	07	08
09	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24

Type 379

Screw type terminal block, pluggable, centerline 3.81 mm / 0.150 inches, wire entry parallel to plug direction, lift system, contact system with integrated wire protection, with mounting flange

Technical Data

US V / A / AWG 300 / 8 / 28 - 16

0.08 - 1.5 mm² 160 V / 2.5 kV / 8 A

Insulation co-ordination according to EN 60664-1

Clearance and creepage distances min. 3.5 mm

Insulating material class CTI 600

Overvoltage category III III II

Pollution degree 3 2 2

Rated voltage 250 630 630

Rated test voltage 2.5 6 4

Protection category according to IEC 529 IP20

Tightening torque UL 2.2 lb-in max.


Min. insul. strip length 7 mm

Pole size 2 - 24

Color black

Dimensions in mm

1 mm = 0.0394 in.

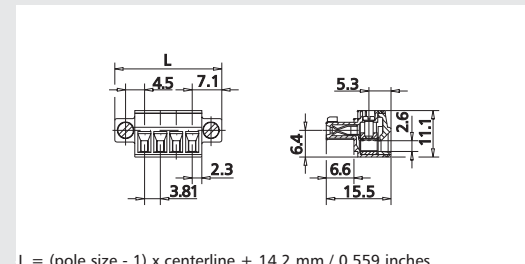

L = (pole size - 1) x centerline + 14.2 mm / 0.559 inches

Part numbers (P/N)

(information: page 56)

Complete the part number by adding the pole size.

Type 379

centerline 3.81 mm / 0.150 inches

P/N 313791

	02	03	04	05	06	07	08
09	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24

Standard pole sizes

Available on demand. Minimum order quantity 5000 pieces per item.

Standard pole sizes

Available on demand. Minimum order quantity 5000 pieces per item.