

Single terminals




103


Type 360272

Single terminal block, solderable, horizontal wire entry, open construction, double solder pins, screw brought down by hand (transport safety)

Technical Data

 A / AWG	15 / 26 - 14
Insulation co-ordination according to EN 60664-1	
Protection category according to IEC 529	IP00
Tightening torque UL	4.4 lb-in max.
Solder pin dimension	2 x 1.0 mm
Recommended pc board hole dia.	Ø 1.5 mm
Solder pin length	3.5 mm

Dimensions in mm 1 mm = 0.0394 in.

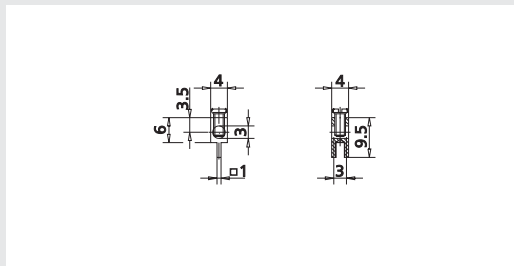


Part numbers (P/N)

Type 360272
P/N 360272


Type 360273

Single terminal block, solderable, horizontal wire entry, wire protector, open construction, double solder pins, screw brought down by hand (transport safety)

Technical Data

 A / AWG	15 / 26 - 14
Insulation co-ordination according to EN 60664-1	
Tightening torque UL	4.4 lb-in max.
Solder pin dimension	2 x 1.0 mm
Recommended pc board hole dia.	Ø 1.5 mm
Solder pin length	3.5 mm

Dimensions in mm 1 mm = 0.0394 in.

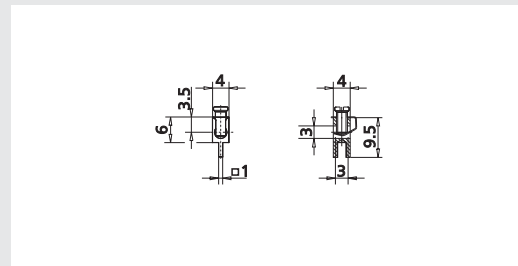

Part numbers (P/N)

Type 360273
P/N 360273