

## Typical Applications

Base Stations  
 Digital Switching  
 Synthesizers  
 Test Equipment

## Features

Standard Package  
 Low Aging  
 AT-Cut and SC-Cut Crystal Options  
 Fast Warm-up



## Previous Vectron Model Numbers

OCO100, 4598, MC2001 Series

## Frequency range

5 MHz – 40 MHz

## Standard frequencies

10; 16.384 MHz

## Frequency stabilities<sup>1</sup> [AT Cut Crystal – Standard]

| Parameter  | Min  | Typ | Max. | Units   | Operating temp range                                    | Ordering Code |
|--|------|-----|------|---------|---|---------------|
| vs. operating temperature range<br>(Referenced to +25°C) | -30  |     | +30  | ppb     | 0 ... +70°C   | C308          |
|  | -80  |     | +80  | ppb     | -20 ... +70°C   | D808          |
|  | -100 |     | +100 | ppb     | -40 ... +70°C   | E107          |
|  | -200 |     | +200 | ppb     | -40 ... +85°C   | F207          |
| Parameter  | Min  | Typ | Max. | Units   | Condition   |               |
| Initial tolerance  | -300 |     | +300 | ppb     | at time of shipment, nominal EFC                        |               |
| vs. supply voltage change                                | -5   |     | +5   | ppb     | V <sub>S</sub> ± 5%                                     |               |
| vs. load change  | -5   |     | +5   | ppb     | Load ± 5%   |               |
| vs. aging /1 day   | -2.0 |     | +2.0 | ppb     | after 72 hours of operation                             |               |
| vs. aging /1 Year  | -500 |     | +500 | ppb     | after 72 hours of operation                             |               |
| vs. aging / year (following Years)                       | -250 |     | +250 | ppb     |   |               |
| Warm-up Time   |      |     | 3    | minutes | to ± 100ppb of final frequency (1 hour reading) @ +25°C |               |

## Frequency stabilities<sup>1</sup> [SC Cut Crystal – Option]

| Parameter  | Min  | Typ | Max. | Units   | Operating temp range                                   | Ordering Code |
|--|------|-----|------|---------|--|---------------|
| vs. operating temperature range<br>(Referenced to +25°C) | -10  |     | +10  | ppb     | 0 ... +70°C  | C108          |
|  | -15  |     | +15  | ppb     | -20 ... +70°C  | D158          |
|  | -20  |     | +20  | ppb     | -40 ... +70°C  | E208          |
|  | -30  |     | +30  | ppb     | -40 ... +85°C  | F308          |
| Parameter  | Min  | Typ | Max. | Units   | Condition  |               |
| Initial tolerance  | -100 |     | +100 | ppb     | at time of shipment, nominal EFC                       |               |
| vs. supply voltage change                                | -5.0 |     | +5.0 | ppb     | V <sub>S</sub> ± 5%                                    |               |
| vs. load change  | -5.0 |     | +5.0 | ppb     | Load ± 5%  |               |
| vs. aging /1 day   | -1.0 |     | +1.0 | ppb     | after 72 hours of operation                            |               |
| vs. aging /1 Year  | -100 |     | +100 | ppb     | after 72 hours of operation                            |               |
| vs. aging / year (following Years)                       | -50  |     | +50  | ppb     |  |               |
| Warm-up Time   |      |     | 3    | minutes | to ± 10ppb of final frequency (1 hour reading) @ +25°C |               |

## Supply voltage (Vs)

| Parameter                 | Min   | Typ  | Max.  | Units | Condition            | Ordering Code |
|---------------------------|-------|------|-------|-------|----------------------|---------------|
| Supply voltage [Standard] | 4.75  | 5    | 5.25  | VDC   |                      | SV050         |
| Supply voltage [Option]   | 11.4  | 12.0 | 12.6  | VDC   |                      | SV120         |
| Supply voltage [Option]   | 3.135 | 3.3  | 3.465 | VDC   |                      | SV033         |
| Power consumption         |       |      | 3.5   | Watts | during warm-up       |               |
|                           |       |      | 1.2   | Watts | steady state @ +25°C |               |

## RF output

| Parameter          | Min      | Typ  | Max. | Units | Condition   | Ordering Code |
|--------------------|----------|------|------|-------|---|---------------|
| Signal [Standard]  | HCMOS    |      |      |       |   | RFH           |
| Load               |          | 15   |      | pF    | with Vs=12.0V or 5.0V and 15pF load<br>with Vs=3.3V and 15pF load<br>with Vs=12.0V or 5.0V and 15pF load<br>with Vs=3.3V and 15pF load<br>@ (Voh-Vol)/2 |               |
| Signal Level (Vol) |          |      | 0.5  | VDC   |   |               |
| Signal Level (Voh) | 4.5      |      | 0.3  | VDC   |   |               |
| Duty cycle         | 3.0      |      |      | VDC   |   |               |
| Signal [Option]    | Sinewave |      |      |       |   | RFS           |
| Load               |          | 50   |      | Ω     | 50 Ohm load<br>50 Ohm load  |               |
| Output Power       | +3.0     | +5.5 | +8.0 | dBm   |   |               |
| Harmonics          |          |      | -30  | dBc   |   |               |

## Frequency Tuning (EFC)

| Parameter             | Min                   | Typ   | Max. | Units | Condition           | Ordering Code <sup>5</sup> |
|-----------------------|-----------------------|-------|------|-------|---------------------|----------------------------|
| Tuning Range          | Fixed OCXO; No adjust |       |      |       |                     | 0                          |
| Tuning Range          | ±0.75                 | ±1.25 | ±2.0 | ppm   | with SC Cut Crystal | 1                          |
|                       | ±6.0                  | ±8.0  | ±12  | ppm   | with AT Cut Crystal | 1                          |
| Linearity             |                       |       | 20   | %     |                     |                            |
| Tuning Slope          | Positive              |       |      |       |                     |                            |
| Control Voltage Range | 0.0                   | 2.0   | 4.0  | VDC   | with Vs=5.0VDC      |                            |
|                       | 0.0                   | 2.5   | 5.0  | VDC   | with Vs=12VDC       |                            |
|                       | 0.0                   | 1.5   | 3.0  | VDC   | with Vs=3.3VDC      |                            |

## Reference Voltage Output (Vref)

| Parameter         | Min  | Typ | Max. | Units | Condition      |
|-------------------|------|-----|------|-------|----------------|
| Reference Voltage | 3.92 | 4.0 | 4.08 | VDC   | with Vs=5.0VDC |
|                   | 4.9  | 5.0 | 5.1  | VDC   | with Vs=12VDC  |
|                   | 2.75 | 2.8 | 2.85 | VDC   | with Vs=3.3VDC |

## Additional parameters


| Parameter                | Min                        | Typ | Max. | Units  | Condition               |
|--------------------------|----------------------------|-----|------|--------|-------------------------|
| Phase Noise <sup>3</sup> |                            |     | -85  | dBc/Hz | 1 Hz with 10 MHz SC Cut |
|                          |                            |     | -120 | dBc/Hz | 10 Hz                   |
|                          |                            |     | -140 | dBc/Hz | 100 Hz                  |
|                          |                            |     | -145 | dBc/Hz | 1 kHz                   |
|                          |                            |     | -150 | dBc/Hz | 10 kHz                  |
| Phase Noise <sup>3</sup> |                            |     | -75  | dBc/Hz | 1 Hz with 10 MHz AT Cut |
|                          |                            |     | -100 | dBc/Hz | 10 Hz                   |
|                          |                            |     | -130 | dBc/Hz | 100 Hz                  |
|                          |                            |     | -140 | dBc/Hz | 1 kHz                   |
|                          |                            |     | -150 | dBc/Hz | 10 kHz                  |
| Weight                   |                            |     | 3.0  | g      |                         |
| Processing & Packing     | Handling & processing note |     |      |        |                         |

## Enclosures

### Type A

Package Codes:

| Code            | Height "H" | Pin Length "L" |
|-----------------|------------|----------------|
| A1              | 19.00      | 5.0            |
| A2              | 15.00      | 5.0            |
| A3 <sup>5</sup> | 12.70      | 5.0            |

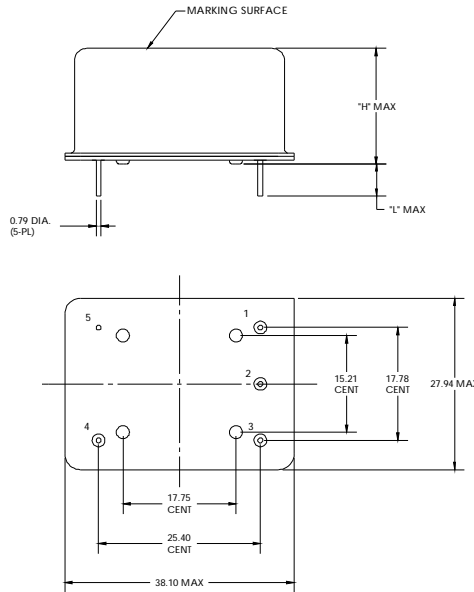

Dimensions: mm

#### Pin Connections

- 1 Electronic Frequency Control Input (EFC)
- 2 Reference Voltage Output
- 3 Supply Voltage Input (Vs)
- 4 RF Output
- 5 Ground (Case)

## Absolute Maximum Ratings

| Parameter                  | Min | Typ | Max. | Units | Condition            |
|----------------------------|-----|-----|------|-------|----------------------|
| Supply voltage (Vs)        |     |     | 7.0  | V     | with Vs=5.0VDC       |
|                            |     |     | 15.0 | V     | with Vs=12VDC        |
|                            |     |     | 7.0  | V     | with Vs=3.3VDC       |
| Output Load                |     |     | 50   | pF    | with HCMOS signal    |
|                            |     |     | 25   | Ohms  | with Sinewave signal |
| Operable temperature range | -55 |     | +85  | °C    |                      |
| Storage temperature range  | -55 |     | +125 | °C    |                      |

Vectron International - [www.vectron.com](http://www.vectron.com)

v.2006-11-10 - page 3 of 4

**Vectron International**  
 Headquarters  
 267 Lowell Road  
 Hudson, New Hampshire 03051  
 +1-888-328-7661 tel  
 +1-888-329-8328 fax

**Vectron International LLC.**  
 100 Watts Street  
 Mount Holly Springs, PA 17065  
 USA  
 +1-717-486-3411 tel  
 +1-717-486-5920 fax

**Vectron international GmbH & Co. KG**  
 Landstrasse  
 D-74924 Neckarbischofsheim  
 Germany  
 +49-07268-801-0 tel  
 +49-07268-801-281 fax

**Vectron Asia Pacific Sales Office**  
 Unit 3119 31st Floor, Jin Mao Tower, 88  
 Century Boulevard, Shanghai,  
 P.R. China 200120  
 +86 21 28909740 tel.  
 +86 21 28909240 fax

## How to order this product:

| Step 1 | Use this worksheet to forward the following information to your factory representative : |                     |                |              |                           |           |
|--------|--|---------------------|----------------|--------------|---------------------------|-----------|
| Model  | Stability Code   | Supply Voltage Code | RF Output Code | Package Code | Frequency Control/ Enable | Frequency |
| C4600  | D808   | SV050               | RFH            | A1           | 1                         | 5MHz      |

### Vs.operat. Temp. Range

|       |         |              |
|-------|---------|--------------|
| C308: | ±30ppb  | 0 ...+70°C   |
| D808: | ±80ppb  | -20 ...+70°C |
| E107: | ±100ppb | -40 ...+70°C |
| F207: | ±200ppb | -40 ...+85°C |
| C108: | ±10ppb  | 0 ...+70°C   |
| D158: | ±15ppb  | -20 ...+70°C |
| E208: | ±20ppb  | -40 ...+70°C |
| F208: | ±30ppb  | -40 ...+85°C |

### Signal:

RFH: HCMOS  
RFS: Sinewave

### Tuning Range:

0: Fixed OCXO; No adjust  
1: ±0.75 ppm..±2.0 ppm(SC)  
1: ±6.0 ppm..±12.0 ppm(AT)

### Supply:

SV033: 3.3V  
SV050: 5V  
SV120: 12V

### Enclosure:

A1: H: 19.0 L: 5  
A2: H: 15.0 L: 5  
A3: H: 12.7 L: 5

| Step 2 | The factory representative will then respond with a Vectron Model Number in the following configuration: |      |                                    |
|--------|--|------|------------------------------------|
| Model  | Package Code   | Dash | Dash Number                        |
| C4600  | [Customer Specified Package Code]  | -    | [Factory Generated 4 digit number] |

Typical P/N = C4600A1-0001

### Notes:

- Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
- Unless otherwise stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C)
- Phase noise degrades with increasing output frequency.
- Subject to technical modification.
- Contact factory for availability.

Vectron International - [www.vectron.com](http://www.vectron.com)

v.2006-11-10 - page 4 of 4

**Vectron International**  
**Headquarters**  
 267 Lowell Road  
 Hudson, New Hampshire 03051  
 +1-888-328-7661 tel  
 +1-888-329-8328 fax

**Vectron International LLC.**  
 100 Watts Street  
 Mount Holly Springs, PA 17065  
 USA  
 +1-717-486-3411 tel  
 +1-717-486-5920 fax

**Vectron international GmbH & Co. KG**  
 Landstrasse  
 D-74924 Neckarbischofsheim  
 Germany  
 +49-07268-801-0 tel  
 +49-07268-801-281 fax

**Vectron Asia Pacific Sales Office**  
 Unit 3119 31st Floor, Jin Mao Tower, 88  
 Century Boulevard, Shanghai,  
 P.R. China 200120  
 +86 21 28909740 tel.  
 +86 21 28909240 fax