



# Schottky Powermod

## FST19235 – FST19245

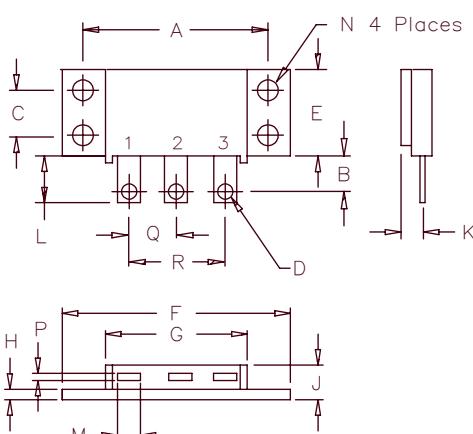

Notes:

Baseplate: Nickel plated copper;  
electrically isolated  
Pins: Nickel plated copper

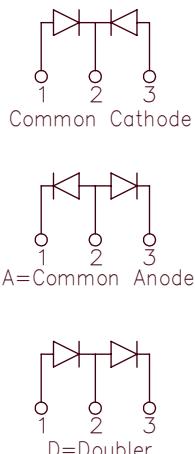

Dim.	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	1.995	2.005	50.67	50.93	
B	0.300	0.325	7.62	8.26	
C	0.495	0.505	12.57	12.83	
D	0.182	0.192	4.62	4.88	Dia.
E	0.990	1.010	25.15	25.65	
F	2.390	2.410	60.71	61.21	
G	1.500	1.525	38.10	38.70	
H	0.120	0.130	3.05	3.30	
J	---	0.400	---	10.16	
K	0.240	0.260	6.10	6.60 to Lead Q	
L	0.490	0.510	12.45	12.95	
M	0.330	0.350	8.38	6.90	
N	0.175	0.195	4.45	4.95	Dia.
P	0.035	0.045	0.89	1.14	
Q	0.445	0.455	11.30	11.56	
R	0.890	0.910	22.61	23.11	

TO-249

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
FST19235*	35V	35V	
FST19240*	40V	40V	
FST19245*	45V	45V	

\*Add the Suffix A for Common Anode, D for Doubler

- Guard Ring Protection
- Electrically Isolated Base
- Schottky Barrier Rectifier
- Low Forward Voltage
- Reverse Energy Tested
- $V_{RRM}$  35 to 45 Volts
- ROHS Compliant

### Electrical Characteristics

Average Forward Current per pkg.  
 Average Forward Current per leg  
 Maximum Surge Current per leg  
 Max. Peak Forward Voltage per leg  
 Max. Peak Forward Voltage per leg  
 Max. Peak Reverse Current per leg  
 Max. Peak Reverse Current per leg  
 Typical Junction Capacitance per leg

I<sub>F(AV)</sub> 200 Amps  
 I<sub>F(AV)</sub> 100 Amps  
 I<sub>FSM</sub> 1500 Amps  
 V<sub>FM</sub> 0.40 Volts  
 V<sub>FM</sub> 0.52 Volts  
 I<sub>RM</sub> 2A  
 I<sub>RM</sub> 10 mA  
 C<sub>J</sub> 5500 pF

T<sub>C</sub> = 86°C, Square wave,  $R_{\theta JC}$  = 0.35°C/W  
 T<sub>C</sub> = 86°C, Square wave,  $R_{\theta JC}$  = 0.7°C/W  
 8.3ms, half sine, T<sub>J</sub> = 150°C  
 I<sub>FM</sub> = 100A, T<sub>J</sub> = 150°C\*  
 I<sub>FM</sub> = 100A, T<sub>J</sub> = 25°C\*  
 V<sub>RRM</sub>, T<sub>J</sub> = 125°C\*  
 V<sub>RRM</sub>, T<sub>J</sub> = 25°C  
 VR = 5.0V, T<sub>J</sub> = 25°C

\*Pulse test: Pulse width 300μsec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	T <sub>STG</sub>	-55°C to 150°C
Operating junction temp range	T <sub>J</sub>	-55°C to 150°C
Max thermal resistance per leg	R <sub>θJC</sub>	0.7°C/W Junction to case
Max thermal resistance per pkg.	R <sub>θJC</sub>	0.35°C/W Junction to case
Typical thermal resistance (greased)	R <sub>θCS</sub>	0.1°C/W Case to sink
Weight		2.3 ounces (58.5 grams) typical
Mounting Torque		15–20 inch pounds

# FST19235 – FST19245

Figure 1  
Typical Forward Characteristics – Per Leg

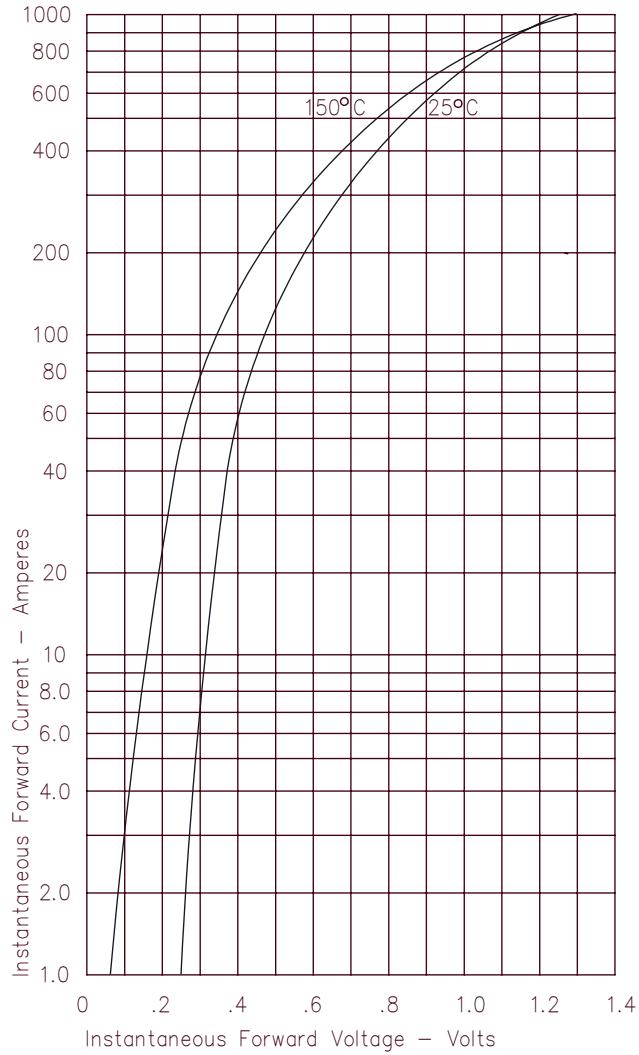


Figure 2  
Typical Reverse Characteristics – Per Leg

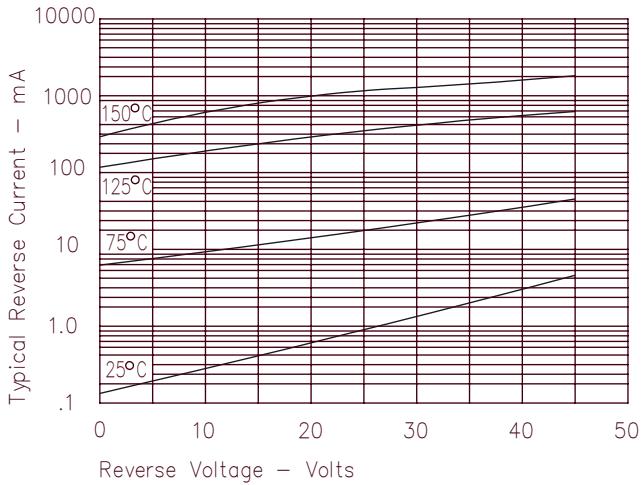


Figure 3  
Typical Junction Capacitance – Per Leg

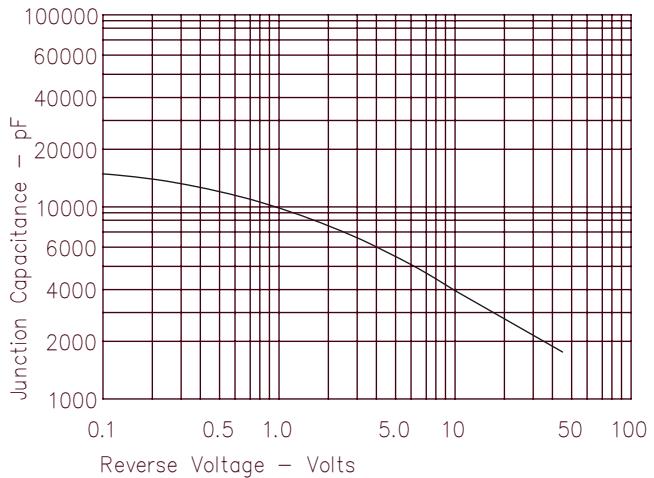


Figure 4  
Forward Current Derating – Per Leg

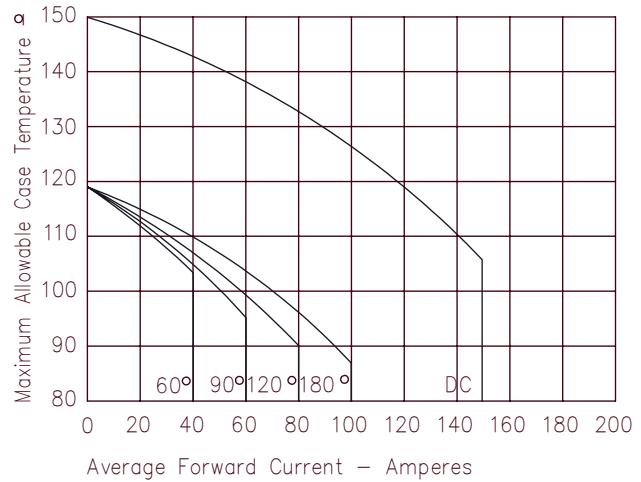


Figure 5  
Maximum Forward Power Dissipation – Per Leg

