


30 Amp Schottky Rectifiers

USD3030S — USD3045S

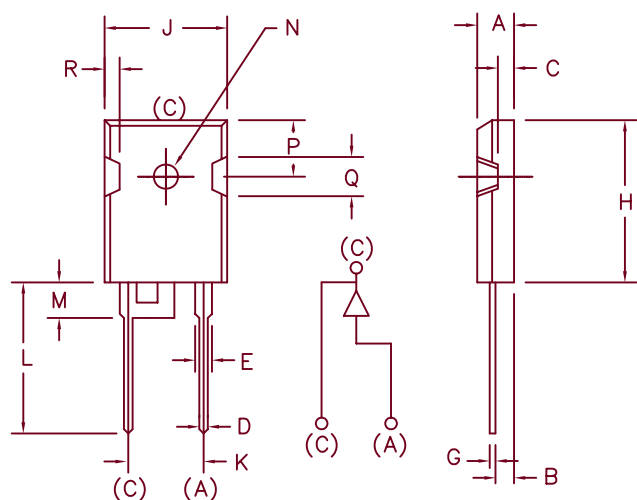

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.185	.209	4.70	5.31	
B	.087	.102	2.21	2.59	
C	.059	.098	1.50	2.49	
D	.040	.055	1.02	1.40	
E	.079	.094	2.01	2.39	
F	---	---	---	---	
G	.016	.031	.410	0.78	
H	.819	.883	20.80	22.4	
J	.627	.650	15.93	16.5	
K	.430	---	10.92	---	
L	.790	.810	20.07	20.6	
M	.157	.180	3.99	4.57	
N	.139	.144	3.53	3.66	Dia.
P	.255	.300	6.48	7.62	
Q	.170	.210	4.32	5.33	
R	.080	.110	2.03	2.79	

Microsemi Catalog Number	Industry Part Number	Repetitive Peak Reverse Voltage	Transient Peak Reverse Voltage
USD3030S		30V	30V
USD3040S		40V	40V
USD3045S		45V	45V

- Schottky Barrier Rectifier
- V_{RRM} 30 to 45 volts
- Low forward voltage
- 150°C junction temperature
- Guard ring for reverse protection

Electrical Characteristics

Average forward current	$I_F(AV)$ 30 Amps	$T_C = 122^\circ C$, square wave
Maximum surge current	I_{FSM} 400 Amps	8.3ms, half sine, $T_J = 150^\circ C$
Max. peak forward voltage	V_{FM} .65 Volts	$I_{FM} = 30A$, $T_J = 25^\circ C^*$
Typical peak forward voltage	V_{FM} .47 Volts	$I_{FM} = 30A$, $T_J = 125^\circ C^*$
Typical peak reverse current	I_{RM} 150 mA	V_{RRM} , $T_J = 125^\circ C^*$
Max. peak reverse current	I_{RM} 2 mA	V_{RRM} , $T_J = 25^\circ C$
Typical junction capacitance	C_J 1200 pF	$VR = 5.0V$, $T_J = 25^\circ C$

*Pulse test: Pulse width 300 μ sec. Duty Cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	$-55^\circ C$ to $+175^\circ C$
Operating junction temp range	T_J	$-55^\circ C$ to $+150^\circ C$
Max thermal resistance per leg	$R_{\theta JC}$	0.9°C/W Junction to case
Max thermal resistance per pkg		8–10 inch pounds (6–32 screw)
Weight		.22 ounces (6.36 grams) typical

SCOTTSDALE
Microsemi
 8700 East Thomas Road, P.O. Box 1390
 Scottsdale, AZ 85252
 PH: (480) 941-6300
 FAX: (480) 947-1503
www.microsemi.com

05-31-07 Rev. 1

USD3030S — USD3045S

Figure 1
Typical Forward Characteristics

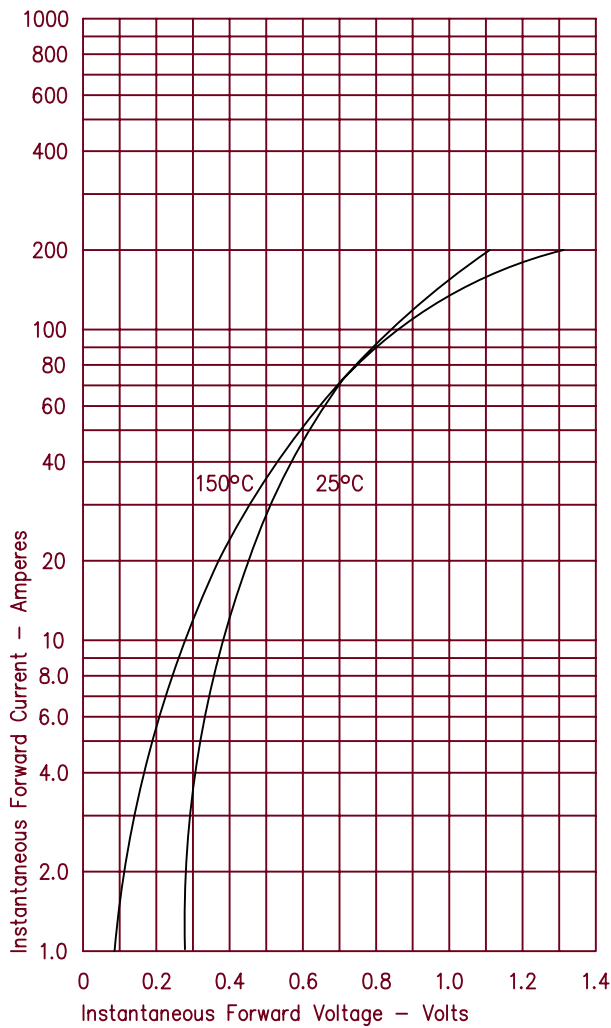


Figure 2
Typical Reverse Characteristics

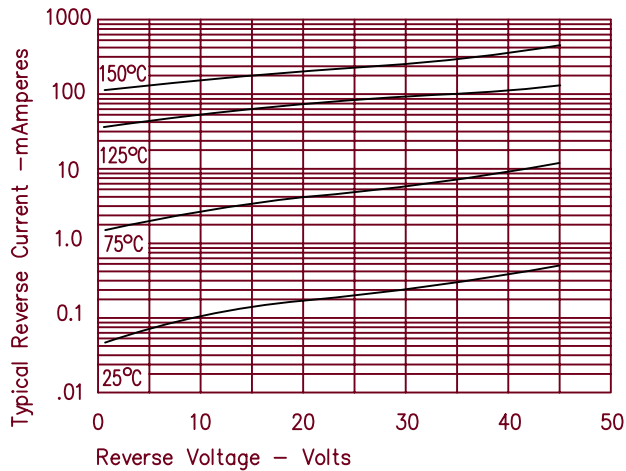


Figure 3
Typical Junction Capacitance

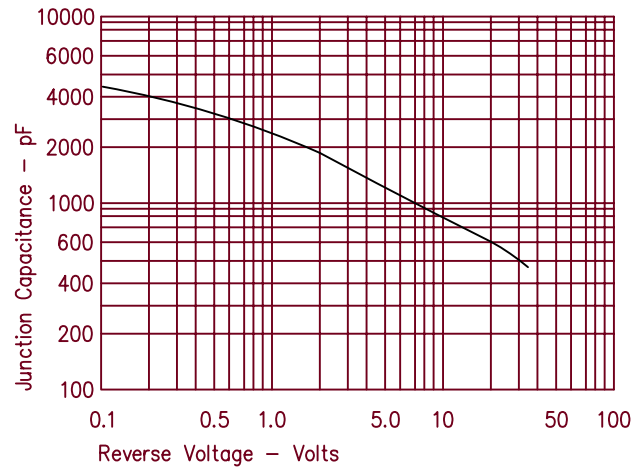


Figure 4
Forward Current Derating

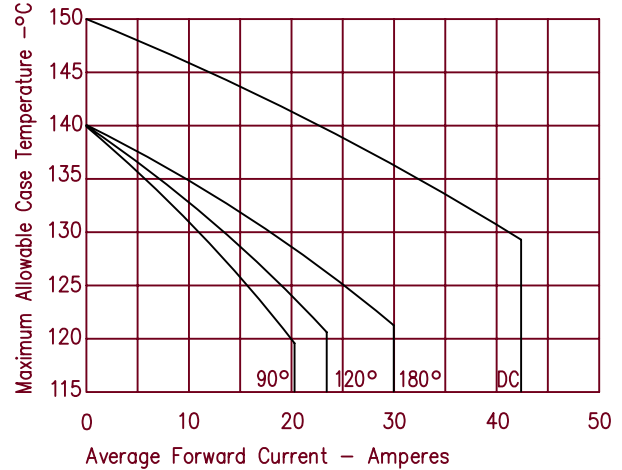


Figure 5
Maximum Forward Power Dissipation

