

# MTC & MTJ Series

9.6mm x 11.7mm SMD

**MMD**  
COMPONENTS



- **Industry Standard Package**
- **5.0 or 3.3 Volt**
- **HCMOS, Sinewave, Clipped Sine**
- **9.600MHz to 50.000MHz**
- **Stability Down to  $\pm 1$ ppm**

## Electrical Specifications

H Option = HCMOS Output	Frequency Range	9.600MHz to 50.000MHz
	Frequency Stability	Down to $\pm 1$ ppm
	Load	10K Ohms // 15pF
	Supply Current	35mA max.
	Output	Logic"1" Level = 0.9Vdd min. Logic"0" Level = 0.1Vdd max.
S Option = Clipped Sine Output	Frequency Range	9.600MHz to 50.000MHz
	Frequency Stability	Down to $\pm 1$ ppm
	Load	10K Ohms // 15pF
	Supply Current	3mA max.
Z Option = Sinewave Output	Output	1.0V p-p min.
	Sinewave Output	9.600MHz to 50.000MHz
	Frequency Stability	Down to $\pm 1$ ppm
	Load	50 Ohms
	Supply Current	5mA max.
	Output	7dBm min.
	Operating Temperature Range	See Part Numbering Guide
Storage Temperature Range		-40°C to +85°C
	Supply Voltage (Vdd)	Vdd = 5V 5.0Vdc $\pm 5\%$ Vdd = 3.3V 3.3Vdc $\pm 5\%$
Internal Trim (Top of can)		$\pm 3$ ppm min.
Control Voltage	Vdd = 5V	2.5Vdc $\pm 2.0$ Vdc Positive Slope
	Vdd = 3.3V	1.65Vdc $\pm 1.5$ Vdc Positive Slope
Pin 1 Connection	Blank	No Connect
Frequency Stability	V Option	$\pm 10$ ppm min.
	vs. Aging	$\pm 1$ ppm per year max.
	vs. Voltage (with a 5% change)	$\pm 0.3$ ppm
	vs. Load (with a 10% change)	$\pm 0.3$ ppm
Symmetry	@50% of waveform w/CMOS load	40/60% or 45/55%

*Notes*



[www.mmdcomp.com](http://www.mmdcomp.com)


Phone 949-709-5075 / Fax: 949-709-3536

OS16


Specifications subject to change without notice

Revision: 3/21/04 H

## Part Numbering Guide

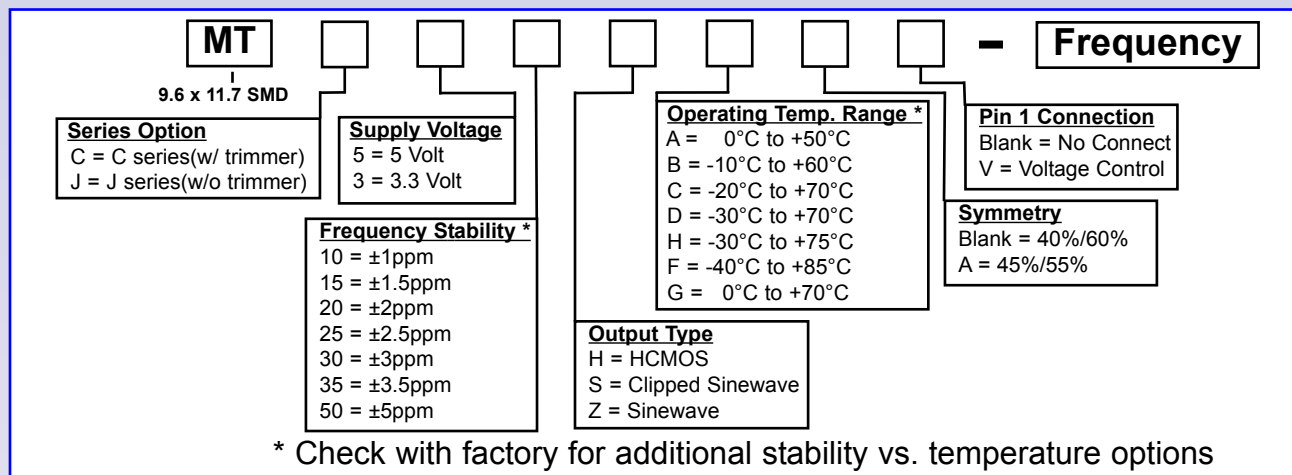

## Mechanical Dimensions

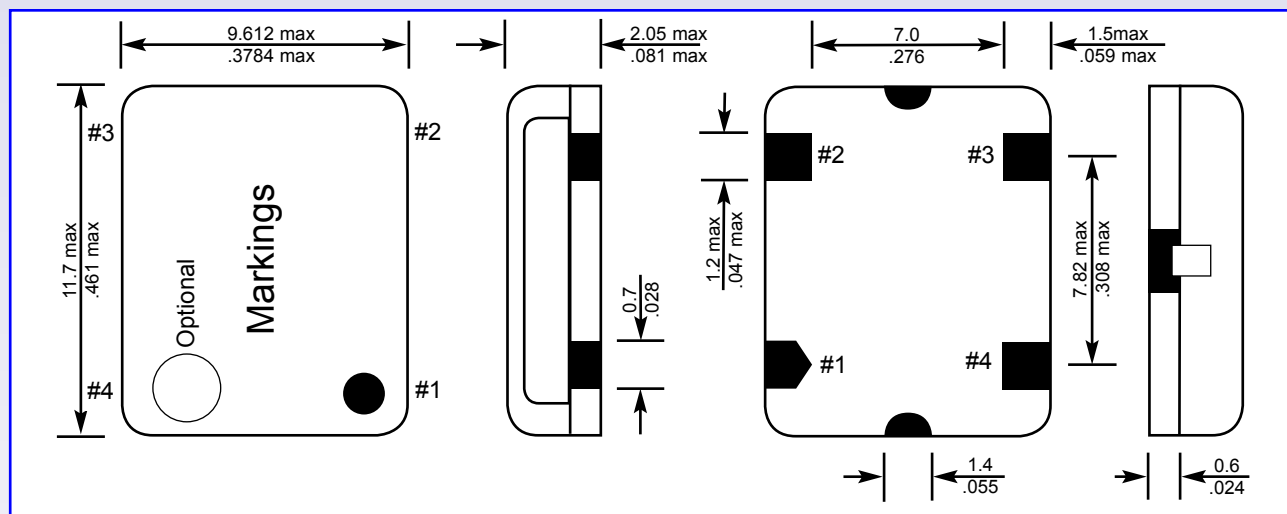


## Pin Connections

Pin 1: Control Voltage or N/C  
 Pin 2: Case Ground  
 Pin 3: Output  
 Pin 4: Supply Voltage

## Markings

Line 1: MMD  
 Line 2: Part Number  
 Line 3: Frequency  
 Line 4: Date Code

## Suggested Solder Pad Layout

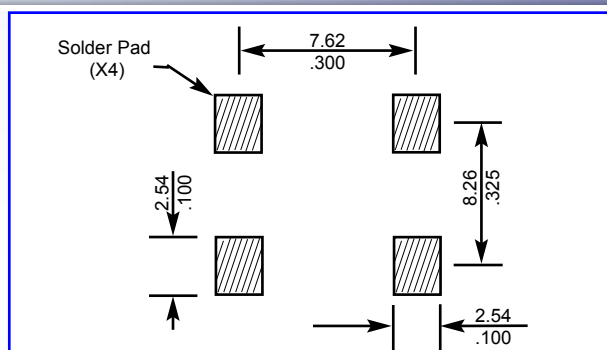

[www.mmdcomp.com](http://www.mmdcomp.com)

Phone 949-709-5075 / Fax: 949-709-3536

OS16

Specifications subject to change without notice

Revision: 3/21/04 H