

# MHO+ Series


## 14 pin DIP, 5.0 Volt, HCMOS/TTL, Clock Oscillator



**This product is not recommended for new designs**

### Features:

- Standard 14 DIP Package
- RoHS Compliant Version Available (-R)
- Tristate Option
- Wide Operating Temperature Range

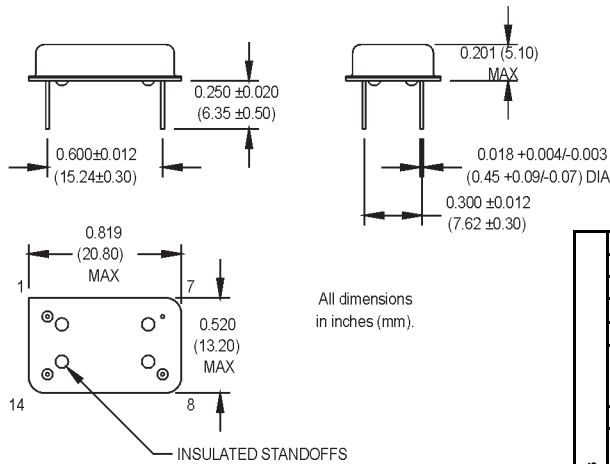

### Pin Connections

| PIN | FUNCTION            |
|-----|---------------------|
| 1   | N/C or Tristate     |
| 7   | Circuit/Case Ground |
| 8   | Output              |
| 14  | +Vdd                |

### Available Symmetry

| FREQUENCY RANGE     | STD. | OPTIONS |
|---------------------|------|---------|
| 0.732 kHz to 50 MHz | A    | B, C, D |
| 50.001 to 60 MHz    | A    | B, C    |
| 60.001 to 67 MHz    | A    | C       |
| 67.001 to 80 MHz    | F,G  | C       |

### Ordering Information

| Product Series                                 | MHO+ | 1                              | 3                                 | F                  | A                  | D                 | -R                | 00.0000 MHz                |
|------------------------------------------------|------|--------------------------------|-----------------------------------|--------------------|--------------------|-------------------|-------------------|----------------------------|
| Temperature Range                              |      | 1: 0°C to +70°C                | 2: -40°C to +85°C                 | 3: -55°C to +105°C | 4: -55°C to +125°C | 5: -10°C to +85°C | 6: -20°C to +70°C | 7: 0°C to +85°C            |
| Stability                                      |      | 1: ±1000 ppm                   | 2: ±500 ppm                       | 3: ±100 ppm        | 4: ±50 ppm         | 5: ±35 ppm        | 6: ±25 ppm        | 7: ±0/-200 ppm *8: ±20 ppm |
| Output Type                                    |      | F: Fixed                       | T: Tristate (1.000 to 80.000 MHz) |                    |                    |                   |                   |                            |
| Symmetry/Logic Compatibility (See Table Below) |      | A: 40/60 HCMOS/TTL             | B: 45/55 TTL                      | C: 45/55 HCMOS     | D: 45/55 HCMOS/TTL | F: 40/60 TTL      | G: 40/60 HCMOS    |                            |
| Package/Lead Configurations                    |      | D: DIP; Nickel Header          | G: Gull Wing; Nickel Header       |                    |                    |                   |                   |                            |
| RoHS Compliance                                |      | Blank: non-RoHS compliant part | -R: RoHS compliant part           |                    |                    |                   |                   |                            |
| Frequency (customer specified)                 |      |                                |                                   |                    |                    |                   |                   |                            |

\*Contact factory for availability  
M2014Sxxx - Contact factory for datasheet.

| PARAMETER                     | Symbol | Min.                                                                            | Typ. | Max.           | Units          | Condition/Notes                                                      |
|-------------------------------|--------|---------------------------------------------------------------------------------|------|----------------|----------------|----------------------------------------------------------------------|
| Frequency Range               | F      | .732 kHz                                                                        |      | 80             | MHz            | See Note 1                                                           |
| Operating Temperature         | Ta     | (See ordering information)                                                      |      |                |                |                                                                      |
| Storage Temperature           | Ts     | -55                                                                             |      | +125           | °C             |                                                                      |
| Frequency Stability           | ΔF/F   | (See ordering information)                                                      |      |                |                |                                                                      |
| Aging                         |        |                                                                                 |      |                |                |                                                                      |
| 1st Year                      |        |                                                                                 | ±3   |                | ppm            |                                                                      |
| Thereafter (per year)         |        |                                                                                 | ±2   |                | ppm            |                                                                      |
| Input Voltage                 | Vdd    | 4.5                                                                             | 5.0  | 5.5            | V              |                                                                      |
| Input Current                 | Idd    |                                                                                 |      | 15<br>25<br>60 | mA<br>mA<br>mA | .732 kHz to 2.999 MHz<br>3.000 to 25.999 MHz<br>26.000 to 80.000 MHz |
| Output Type                   |        |                                                                                 |      |                |                | HCMOS/TTL                                                            |
| Load                          |        |                                                                                 |      |                |                | See Note 2<br>5 TTL or 50 pF<br>10 TTL or 50 pF<br>10 TTL or 15 pF   |
| Symmetry (Duty Cycle)         |        |                                                                                 |      |                |                | (See ordering information)                                           |
| Logic "1" Level               | Voh    | 90% Vdd<br>Vdd-0.5                                                              |      |                | V<br>V         | HCMOS Load<br>TTL Load                                               |
| Logic "0" Level               | Vol    |                                                                                 |      | 10% Vdd<br>0.5 | V<br>V         | HCMOS Load<br>TTL Load                                               |
| Output Current                |        |                                                                                 |      | ±8<br>±16      | mA<br>mA       | .732 kHz to 2.999 MHz<br>3.000 to 80.000 MHz                         |
| Rise/Fall Time                | Tr/Tf  |                                                                                 |      | 20<br>10       | ns<br>ns       | See Note 4<br>.732 kHz to 2.999 MHz<br>3.000 to 80.000 MHz           |
| Tristate Function             |        | Input Logic "1" or floating: output active<br>Input Logic "0": output to high-Z |      |                |                |                                                                      |
| Start up Time                 |        |                                                                                 |      | 10             | ms             |                                                                      |
| Random Jitter                 | Rj     |                                                                                 | 5    | 12             | ps RMS         | 1-Sigma                                                              |
| Mechanical Shock              |        | MIL-STD-202, Method 213, C (100 g's)                                            |      |                |                |                                                                      |
| Vibration                     |        | MIL-STD-202, Method 201 & 204 (10 g's from 10-2000 Hz)                          |      |                |                |                                                                      |
| Thermal Cycle                 |        | MIL-STD-883, Method 1010, B (-55°C to +125°C, 15 min dwell, 10 cycles)          |      |                |                |                                                                      |
| Hermeticity                   |        | MIL-STD-202, Method 112                                                         |      |                |                |                                                                      |
| Solderability                 |        | Per EIAJ-STD-002                                                                |      |                |                |                                                                      |
| Max Wave Soldering Conditions |        | +260°C for 10 seconds                                                           |      |                |                |                                                                      |

- Contact the factory for availability of higher frequencies.
- TTL load - see Load Circuit Diagram #1. HCMOS load - see Load Circuit Diagram #2.
- Symmetry is measured at 1.4 V with TTL load and at 50% Vdd with HCMOS load.
- Rise/fall times are frequency dependent and measured between 0.4 V and 2.4 V with TTL load, and between 10% Vdd and 90% Vdd with HCMOS Load.

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see [www.mtronpti.com](http://www.mtronpti.com) for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.