

LQW2UASR68J00#

" # " indicates a package specification code.

Recommended

General

Wound
(No Shield)
000

Thickness
203mm
max.


E-12
Step

Reflow
OK

RoHS

< List of part numbers with package codes >
LQW2UASR68J00L

Shape

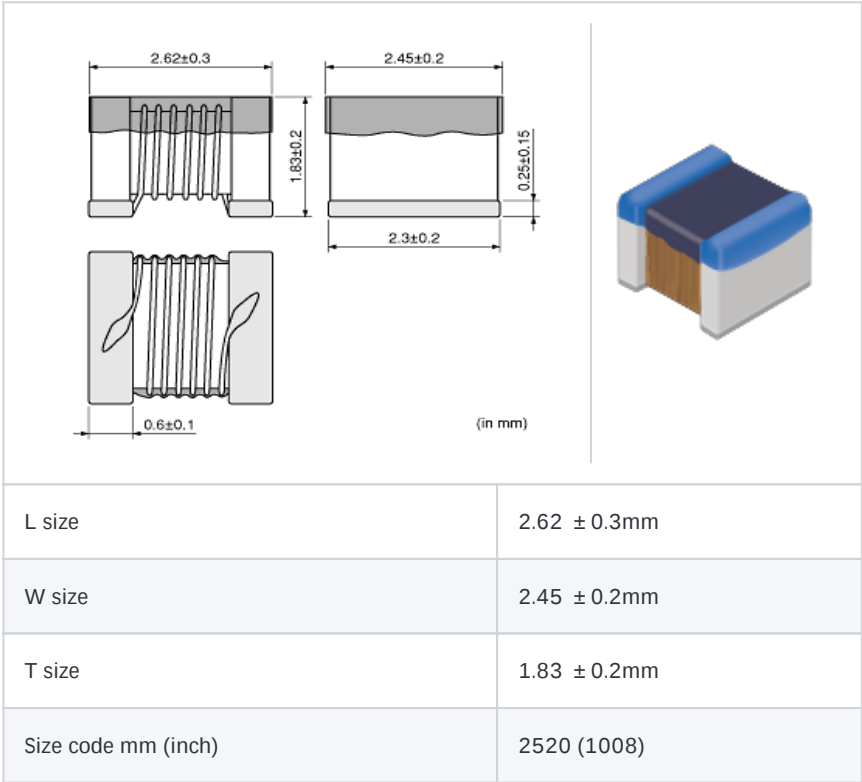

References

Packaging code	Specifications	Minimum quantity
L	Embossed tape (φ 180mm)	2000

Mass (Typ.)	
1 piece	0.039g


Specifications

Inductance	680nH ± 5%
Inductance test frequency	25MHz
Rated current (Itemp) (Based on Temperature rise)	400mA
Max. of DC resistance	1.47 Ω
Q (min.)	45
Q test frequency	100MHz
Self resonance frequency (min.)	375MHz
Operating temperature range (Self-temperature rise is not included)	-55 ~ +125


⚠ Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it ' s specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications.
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

▪ Inductance-Frequency characteristics (Typ.)

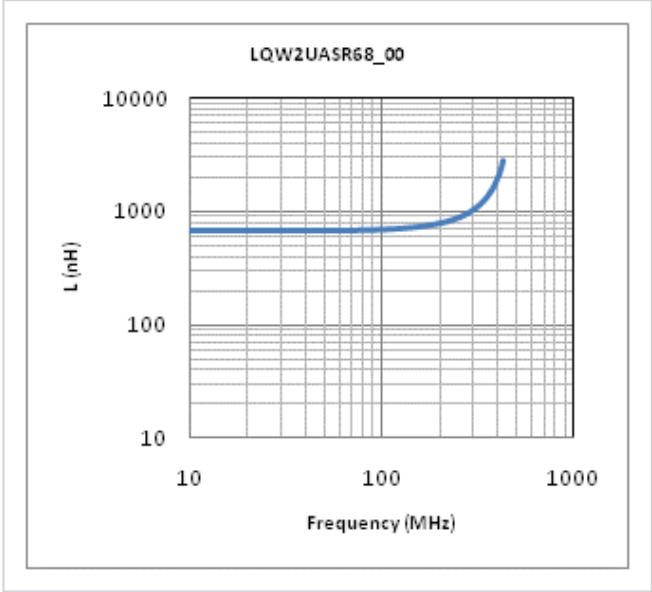

▪ Q-Frequency characteristics (Typ.)

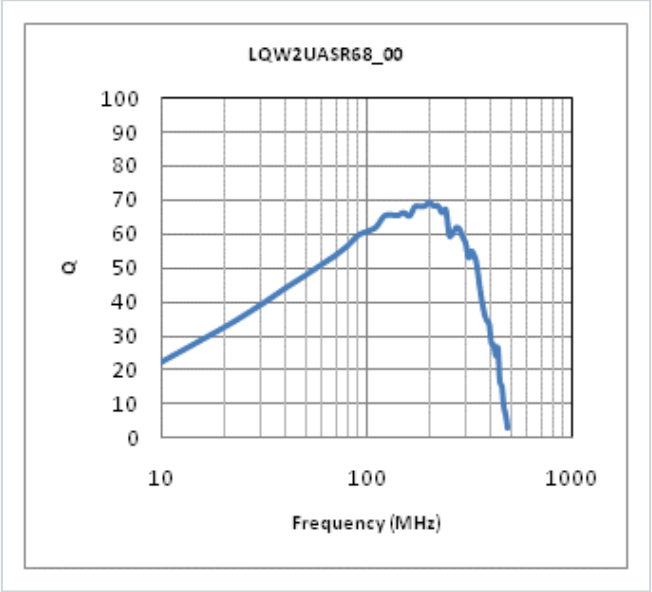

This PDF data has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.