

RPEE41H472M2P1A03B


" # " indicates a package specification code.

- Discontinued
- Flow OK
- Complies with RoHS
- Anti-noise
- Deflecting crack
- Soldering crack

Deadline for last orders: 31 Mar 2011

< List of part numbers with package codes >
RPEE41H472M2P1A03B

Shape

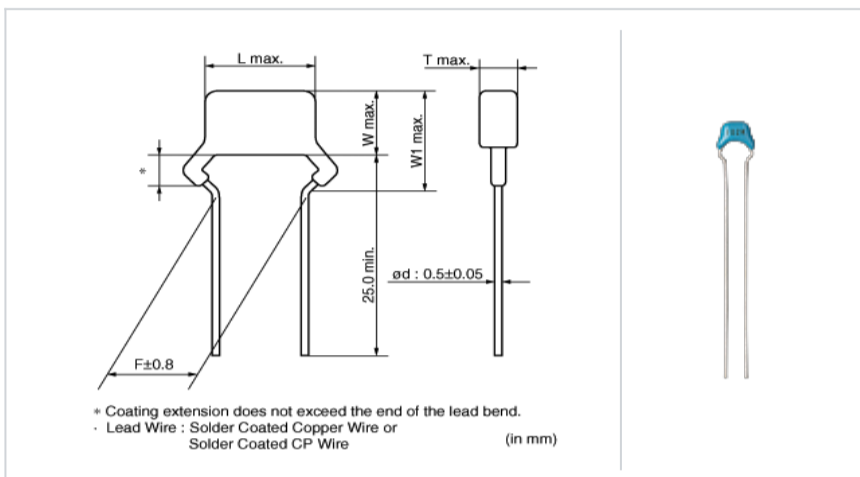

L size or outer diameter D (mm)	5.0 mm max.
W size	3.5 mm max.
T size	2.5 mm max.
Lead spacing F	2.5 ± 0.8mm
Lead diameter d	0.5 ± 0.05mm
W1 size (max.)	5.0mm

References

Packaging	Specifications	Minimum quantity
	Packing in bulk	500

Specifications

Capacitance	4700pF ± 20%
Rated voltage	50Vdc
Temperature characteristics (complied standard)	Z5U(EIA)
Capacitance change rate	+22/-56%
Temperature range of temperature characteristics	10 to 85
Operating temperature range	10 to 85

⚠ Attention

- This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it ' s specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.