



FEATURES

- RoHS compliant
- Output regulation <1.5%
- Output programmable
- Power density 0.85W/cm³
- Single isolated output
- SIP & DIP package styles
- UL 94V-0 package material
- No heatsink required
- Footprint from 1.17cm²
- 1kVDC isolation
- 5V, 12V, 24V & 48V input
- 5V, 9V, 12V & 15V output
- SMD construction
- Fully encapsulated with toroidal magnetics
- No external components required
- MTTF up to 2.4 million hours
- PCB mounting

DESCRIPTION

The NMF series of DC/DC converters is used where a tightly regulated supply is required. They are ideal for situations where the input voltage is not tightly controlled. The output trim pin makes the device particularly suitable for applications requiring a programmable output voltage. The 5V output version can be used to give a regulated output, adjustable between 1.2V and 5.0V with a single resistor. An option not to have this function is available, on SIP package type parts, prefix C with N. The single rail regulated output makes the ideal choice to power sensors, such as pressure transducers, hall effect sensors and mass airflow sensors.



NMF Series

Isolated 1W Regulated Single Output DC/DC Converters

SELECTION GUIDE

Order Code ³	Nominal Input Voltage	Output Voltage	Output Current	Power Out	Efficiency	Isolation Capacitance	MTTF ¹	Package Style
	V	V	mA	mW	%	pF	kHrs	
NMF0505DC	5	5	100	500	50	37	1307	DIP
NMF0509DC	5	9	100	900	62	42	825	
NMF0512DC	5	12	83	1000	62	46	512	
NMF0515DC	5	15	67	1000	62	52	316	
NMF0505SC	5	5	100	500	50	37	1307	SIP
NMF0509SC	5	9	100	900	62	42	825	
NMF0512SC	5	12	83	1000	62	46	512	
NMF0515SC	5	15	67	1000	62	52	316	
NMF1205DC	12	5	100	500	50	62	456	DIP
NMF1209DC	12	9	100	900	62	82	379	
NMF1212DC	12	12	83	1000	62	98	290	
NMF1215DC	12	15	67	1000	62	108	218	
NMF1205SC	12	5	100	500	50	62	456	SIP
NMF1209SC	12	9	100	900	62	82	379	
NMF1212SC	12	12	83	1000	62	98	290	
NMF1215SC	12	15	67	1000	62	108	218	
NMF2405DC	24	5	100	500	50	69	843	DIP
NMF2409DC	24	9	100	900	62	106	613	
NMF2412DC	24	12	83	1000	62	129	422	
NMF2415DC	24	15	67	1000	62	151	279	
NMF2405SC	24	5	100	500	50	69	843	SIP
NMF2409SC	24	9	100	900	62	106	613	
NMF2412SC	24	12	83	1000	62	129	422	
NMF2415SC	24	15	67	1000	62	151	279	
NMF4805DC	48	5	100	500	50	51	200	DIP
NMF4809DC	48	9	100	900	62	86	283	
NMF4812DC	48	12	83	1000	62	108	162	
NMF4815DC	48	15	67	1000	62	127	135	
NMF4805SC	48	5	100	500	50	51	200	SIP
NMF4809SC	48	9	100	900	62	86	283	
NMF4812SC	48	12	83	1000	62	108	162	
NMF4815SC	48	15	67	1000	62	127	135	

When operated with additional external load capacitance the rise time of the input voltage will determine the maximum external capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

ABSOLUTE MAXIMUM RATINGS

Short-circuit protection ²	1 second
Lead temperature 1.5mm from case for 10 seconds	300°C
Internal power dissipation	450mW
Input voltage V _{IN} , NMF05 types	7V
Input voltage V _{IN} , NMF12 types	15V
Input voltage V _{IN} , NMF24 types	28V
Input voltage V _{IN} , NMF48 types	54V

1. Calculated using MIL-HDBK-217F with nominal input voltage at full load.
 2. Supply voltage must be discontinued at the end of the short circuit duration.
 3. For parts with no trim function, SIP package type, prefix C with N, e.g. NMF0505SNC.
- All specifications typical at T_A=25°C, nominal input voltage and rated output current unless otherwise specified.

INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	Continuous operation, 5V input types	4.75	5	5.25	V
	Continuous operation, 12V input types	11.4	12	12.6	
	Continuous operation, 24V input types	22.8	24	25.2	
	Continuous operation, 48V input types	45.6	48	50.4	

OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage set point accuracy	100% load			5	%
Rated power ¹	T _A = 0°C to 70°C			1	W
Line regulation	High V _{IN} to low V _{IN}			0.25	%/%
Load regulation	10% load to rated load		0.9	1.5	%
Ripple & noise	BW=DC to 20MHz, all output types			60	mV p-p

ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Flash tested for 1 second	1000			VDC
Resistance	Viso= 500VDC	0.1			GΩ


GENERAL CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency	All input types		90		kHz

TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	All output types	0		70	°C
Case temperature above ambient			38		
Storage		-55		150	
Cooling	Free air convection				

TEMPERATURE DERATING GRAPH

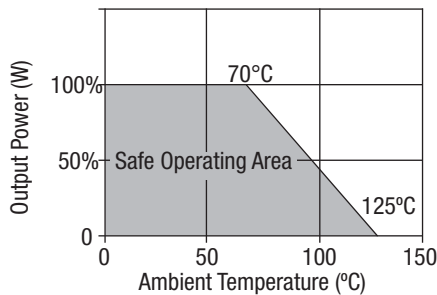

RoHS COMPLIANCE INFORMATION




This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin over Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems.

For further information, please visit www.murata-ps.com/rohs

OUTPUT VOLTAGE ADJUSTMENT (for 5V output variants)


The trimming (adjust) input on the device allows output voltage adjustment from 1.2V to 3.3VDC by using a resistor as shown here. The table below provides R_{TRIM} values for the most commonly required output voltages. For applications not requiring the TRIM function, this pin must be left unconnected for normal regulated output.

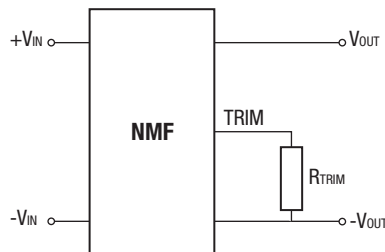


V _{OUT SET} (V)	R _{TRIM} (Ω)
1.2	0
1.5	64
2.0	224
2.1	263
2.2	304
2.5	448
3.3	1071

TYPICAL APPLICATIONS

Pressure sensor, or strain gauge equivalent circuit

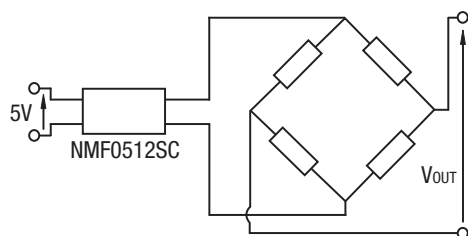

Scmitt Trigger

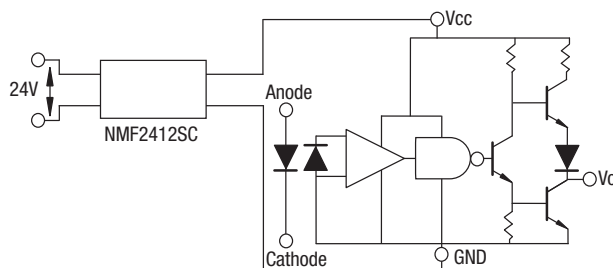

TECHNICAL NOTES

ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NMF series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals, such as the NMF series, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

REPEATED HIGH-VOLTAGE ISOLATION TESTING


It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The NMF series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

PACKAGE SPECIFICATIONS

MECHANICAL DIMENSIONS

DIP package

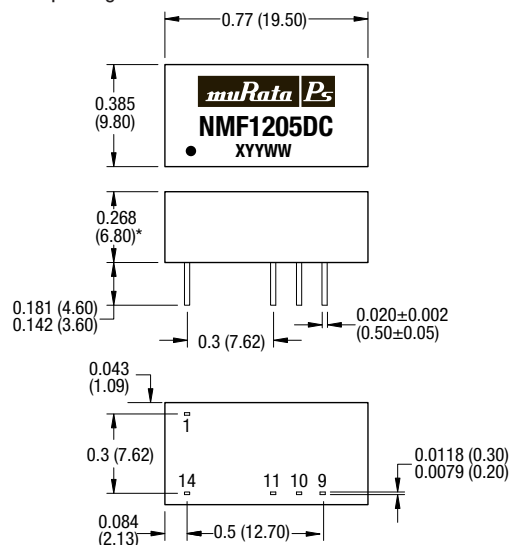


† Trim pin not fitted on suffix SNC parts.

* 0.303 (7.70) for 48V variants

** 0.295 (7.50) for 48V variants

All dimensions in inches ± 0.01 (mm ± 0.25 mm). All pins on a 0.1 (2.54) pitch and within ± 0.01 (0.25) of true position.

SIP package

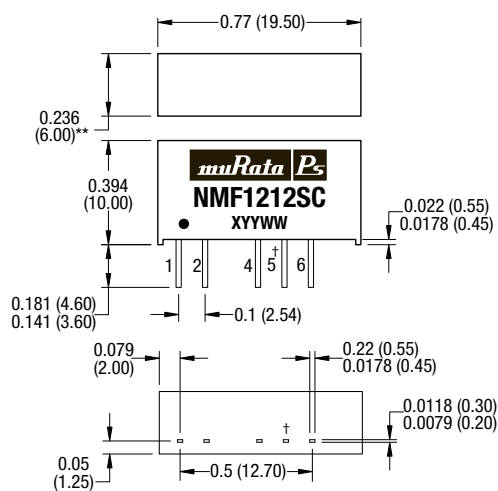

Weight: 2.4g (DIP) 2.1g (SIP) except
for NMF24XX and NMF48XX DIP &
SIP : 2.9g

PIN CONNECTIONS - 14 PIN DIP

Pin	Function
1	$-V_{IN}$
9	$+V_{OUT}$
10	TRIM
11	$-V_{OUT}$
14	$+V_{IN}$

PIN CONNECTIONS - 7 PIN SIP


Pin	Function
1	+V _{IN}
2	-V _{IN}
4	-V _{OUT}
5	TRIM [†]
6	+V _{OUT}

1. See derating graph.


PACKAGE SPECIFICATIONS (continued)

RECOMMENDED FOOTPRINT DETAILS

14 Pin DIP Package

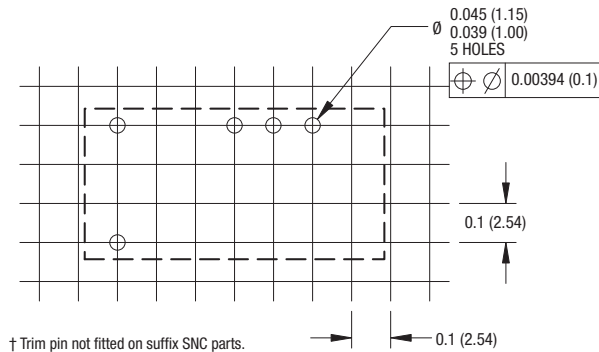


7 Pin SIP Package

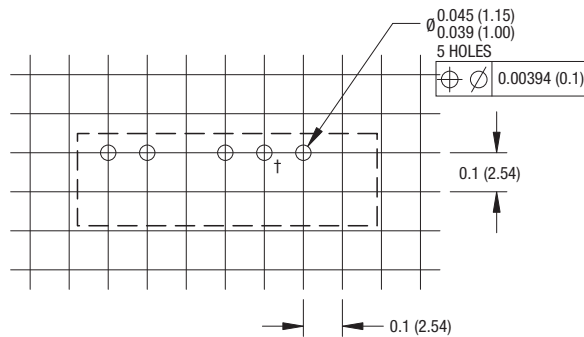


TUBE OUTLINE DIMENSIONS

14 Pin DIP Tube

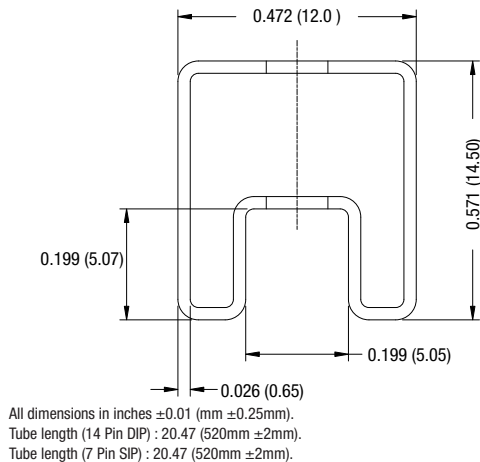

7 Pin SIP Tube

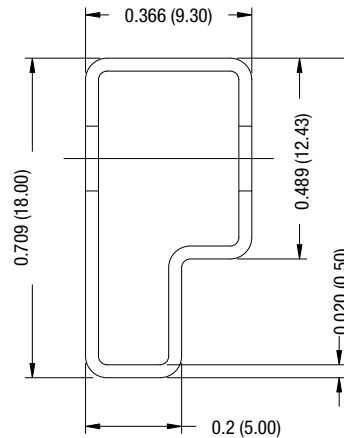

Tube Quantity : 25