

Crystal Clock Oscillator

NZ2520SH

Standard Type (32.768kHz)

■ Application

For Smartphone and Tablet computer etc.

■ Features

- Supports a wide temperature range from -40 to +125°C.
- Compact and light. Dimensions : 2.5 x 2.0 x 0.9 mm, weight : 0.02 g.
- Quick oscillation start up time(Typ. 1ms) is available compared to our Tuning Fork Crystal.
- Conforms to AEC-Q200.



Pb
Free


RoHS Compliant
Directive 2011/65/EU
Directive (EU) 2015/863

Absolute maximum rating
Supply Voltage (V_{CC}) -0.3 to +7.0 V
Storage Temperature Range -55 to +125 °C


■ Specifications

Item			Model	NZ2520SH		
Output Specification				CMOS		
Nominal Frequency			(kHz)	32.768		
Overall Frequency Tolerance			(×10 ⁻⁶)	±100	±50	±30
Operating Temperature Range			(°C)	-40 to +125	-40 to +105	-40 to +85
Supply Voltage (V _{CC})			(V)	1.8 to +3.3		
Current Consumption Max.	During Operation	+25°C	(μA)	160 to 180		
	During Standby	+25°C	(μA)	20		
V _{OL} Max. / V _{OH} Min.			(V)	0.1 V _{CC} / 0.9 V _{CC}		
Tr Max. / Tf Max.			(ns)	200 / 200 (at 0.1V _{CC} to 0.9V _{CC})		
Symmetry Min. to Max.			(%)	45 to 55 (at 0.5V _{CC})		
Load (C _L) Max.			(pF)	15		
Start-up Time Max.			(ms)	4 (Typ. 1ms)		
Frequency Aging Max.			(×10 ⁻⁶)	±5 (+25°C, First year)		
Standby function				Available (Three-state)		

■ Dimensions

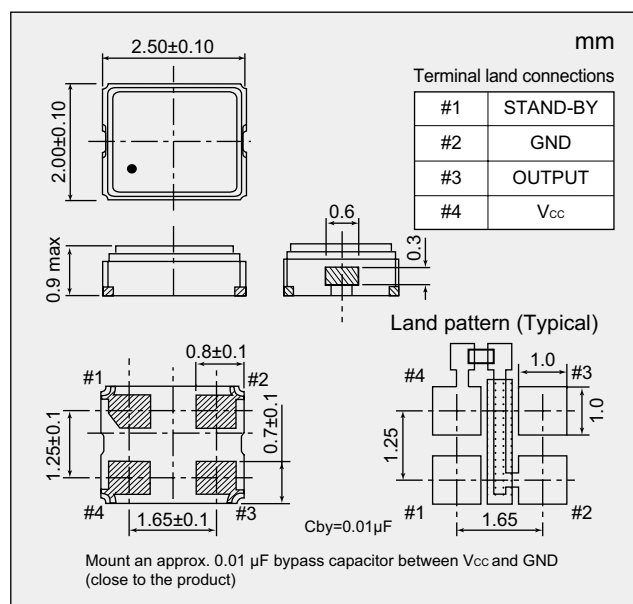

■ Output Waveform <CMOS>

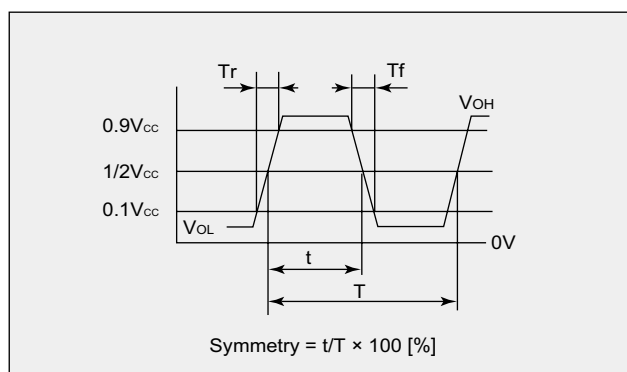

■ Standby Function

#1 Input	#3 Output
Level H ($0.7 V_{CC} \leq V_{IH} \leq V_{CC}$) or OPEN is selected.	Oscillation output ON
Level L ($V_{IL} \leq 0.3 V_{CC}$) is selected.	High impedance

Crystal Clock Oscillator

NZ2520SH

Standard Type (32.768kHz)

■ Specification Number

Overall Frequency Tolerance	Operating Temperature Range (°C)	Supply Voltage (V)			
		+1.8±0.18	+2.5±0.25	+3.0±0.3	+3.3±0.33
±100 × 10 ⁻⁶	-40 to +125	NSC5013A	NSC5013B	NSC5013C	NSC5013D
±50 × 10 ⁻⁶	-40 to +105	NSC5015A	NSC5015B	NSC5015C	NSC5015D
±30 × 10 ⁻⁶	-40 to +85	NSC5018A	NSC5018B	NSC5018C	NSC5018D

Please specify the model name, frequency, and specification number when you order products.

For further questions regarding specifications, please feel free to contact us.