



Audio

Adapter



[back](#)

[Print](#)

NL8MM



8 pole Speakon coupler

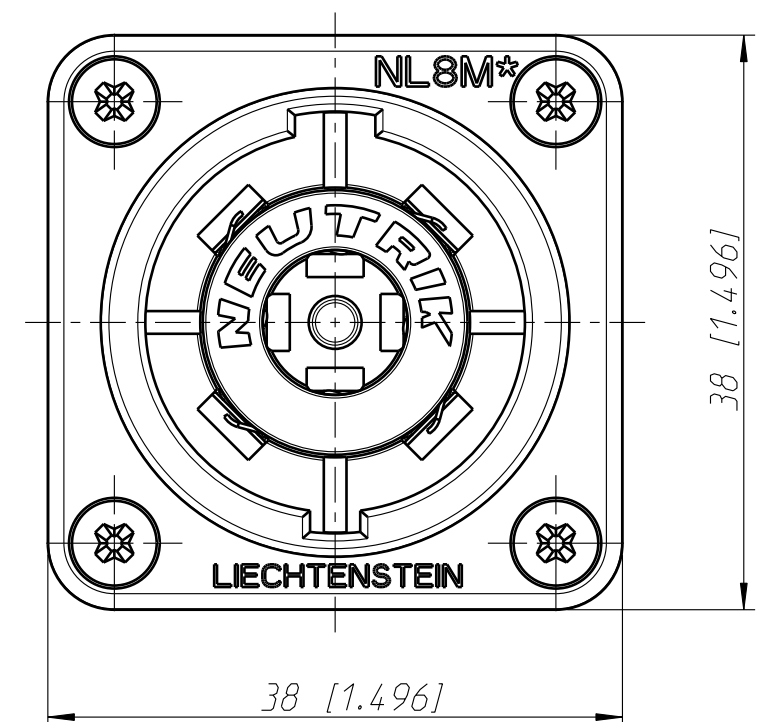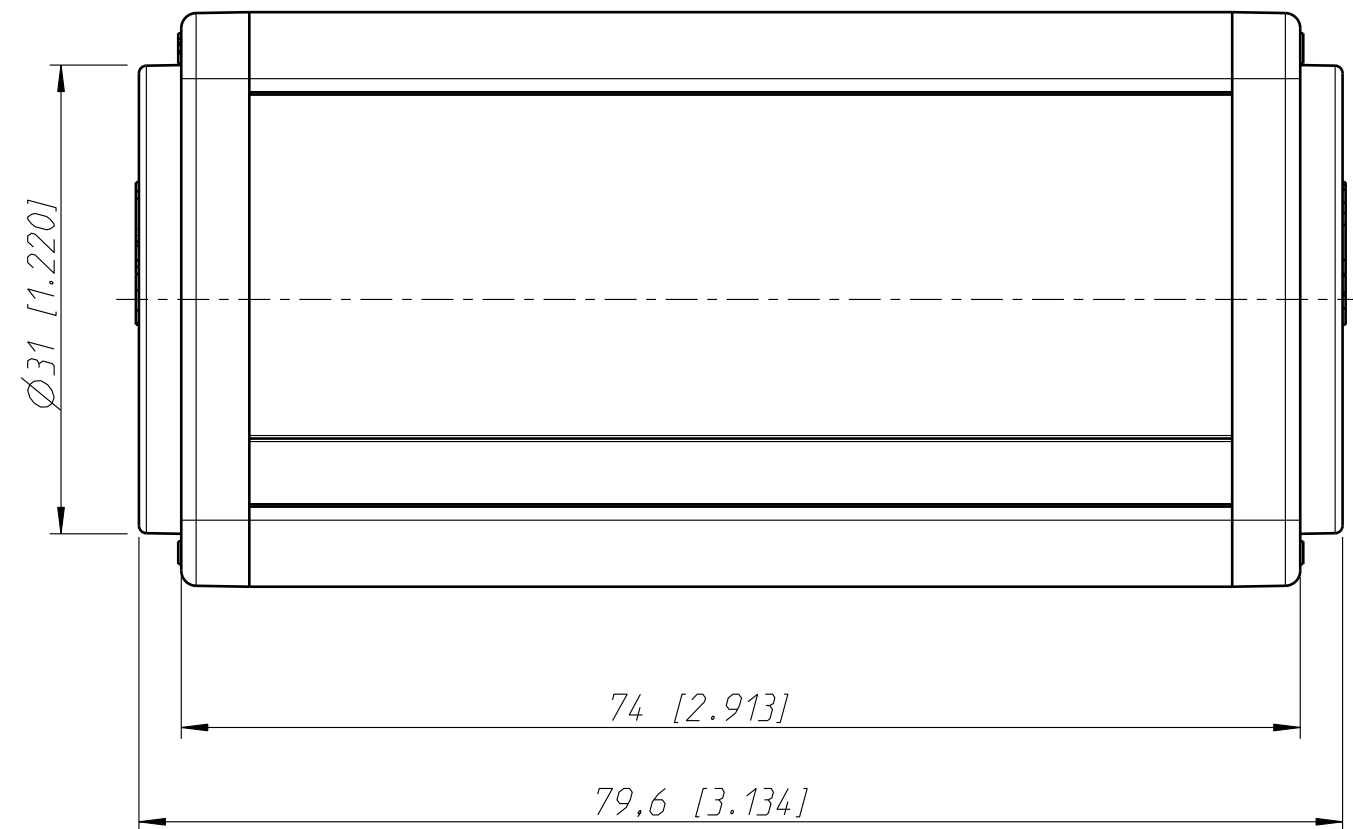

All dimensions in mm


Allgemeintoleranzen ISO 2768-m	Werkstoff -	Massstab: 2:1 (A3)		Datum	Name
Zeichnung urheberrechtlich geschuetzt (DIN 34) (C)			Gezeichnet	08.06.04	Mijatovic
			Freigegeben	-	-
Benennung			Geaendert	-	-
NL8MM			Aend.-Nr.		Aend.-Index
NL8MM			-		-
			Ersatz fuer:		Blatt 1 von 1 Bl.
NEUTRIK AG FL-9494 SCHAAN			Zeichn. Nr.		
				ST-NL8MM	



Audio

Adapter

NL8MM

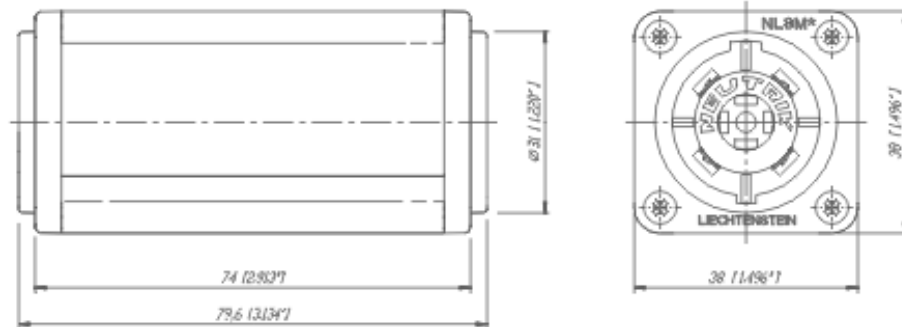

There are no technical infos for this product.

Product

Connector Type	Speakon
Gender	male

Electrical

Contact resistance	$\leq 3 \text{ m}\Omega$ (after lifetime)
Dielectric strength	4 kVdc (peak)
Insulation resistance	$> 1 \text{ G}\Omega$ (after dampheat)
Rated current per contact	20 A
Rated voltage	250 V (Insulation)

Mechanical

Lifetime	> 5000 mating cycles
Locking device	Quick Lock

Material

Contact plating	4 μm Ag
Contacts	Bronze (CuSn6)
Insert	Polyamide (PA 6 30 % GR)
Shell	Polyamide (PA 6 30 % GR)

Environmental

Flammability	UL 94 HB
Solderability	Complies with IEC 68-2-20
Temperature range	-30 °C to +80 °C

Optical

Mobile Cables