


Surface Mount Specialty Polymer Solid Aluminum Electrolytic Capacitors

NSPL Series

FEATURES

- LOW ESL WITH THREE TERMINAL CONSTRUCTION
- ULTRA LOW ESR & HIGH RIPPLE CURRENT
- LONG LIFE AT +105°C (2,000 HOURS)
- Pb-FREE AND COMPATIBLE WITH REFLOW SOLDERING

**LOW ESL &
ULTRA LOW ESR**



CHARACTERISTICS

Rated Working Range	2.0 ~ 6.3VDC		
Rated Capacitance Range	68 ~ 560μF		
Operating Temperature Range	-55 ~ +105°C		
Capacitance Tolerance	± 20% (M)		
Max. Leakage Current (μA) After 2 Minutes (+20°C)	All Case Sizes		≤0.1CV
Max. Tan δ, 120Hz, +20°C			0.06 max.
High Temperature Load Life 2,000 Hours @ 105°C at Rated Working Voltage	Capacitance Change		Within ±20% of initial measured value
	Tan δ		Less than 120% specified max. value
	Leakage Current		Less than 300% specified max. value
Damp Heat Test 500 Hours @ +60°C at 90% RH and Rated Working Voltage	Capacitance Change	6.3V	Within -20%/+50% of initial measured value
		4V	Within -20%/+60% of initial measured value
		2V, 2.5V	Within -20%/+70% of initial measured value
	Tan δ		Less than 200% of specified max. value
	Leakage Current		Less than specified max. value

STANDARD PRODUCTS AND SPECIFICATIONS

NIC Part Number	WV (Vdc)	Cap. (μ F)	Max. LC (μ A)	Tan δ	Max. Ripple Current +45°C & 100KHz (mArms)	Max. ESR +20°C & 100KHz (Ω)	Height (H)
NSPL221M2D5YATRF	2.0	220	44	0.06	7,500	0.006	1.1 $\pm$ 0.1
NSPL221M2DYATRF		220	44	0.06	7,500	0.006	1.0 max.
NSPL221M2DUATRF		220	44	0.06	8,500	0.0045	1.0 max.
NSPL331M2D1YATRF		330	66	0.06	7,500	0.006	1.4 $\pm$ 0.1
NSPL331M2D6YATRF		330	66	0.06	7,500	0.006	1.9 $\pm$ 0.1
NSPL331M2D6UATRF		330	66	0.06	8,500	0.0045	1.9 $\pm$ 0.1
NSPL471M2D6YATRF		470	94	0.06	7,500	0.006	1.9 $\pm$ 0.1
NSPL471M2D6UATRF		470	94	0.06	8,500	0.0045	1.9 $\pm$ 0.1
NSPL471M2D6VATRF		470	94	0.06	10,200	0.003	1.9 $\pm$ 0.1
NSPL561M2D6YATRF		560	112	0.06	7,500	0.006	1.9 $\pm$ 0.1
NSPL561M2D6UATRF		560	112	0.06	8,500	0.0045	1.9 $\pm$ 0.1
NSPL561M2D6VATRF		560	112	0.06	10,200	0.003	1.9 $\pm$ 0.1
NSPL181M2.5D5YATRF	2.5	180	45	0.06	7,500	0.006	1.1 $\pm$ 0.1
NSPL181M2.5DYATRF		180	45	0.06	7,500	0.006	1.0 max.
NSPL181M2.5DUATRF		180	45	0.06	8,500	0.004	1.0 max.
NSPL271M2.5D1YATRF		270	67.5	0.06	7,500	0.006	1.4 $\pm$ 0.1
NSPL331M2.5D6YATRF		330	82.5	0.06	7,500	0.006	1.9 $\pm$ 0.1
NSPL331M2.5D6UATRF		330	82.5	0.06	8,500	0.0045	1.9 $\pm$ 0.1
NSPL471M2.5D6YATRF		470	117.5	0.06	7,500	0.006	1.9 $\pm$ 0.1
NSPL471M2.5D6UATRF		470	117.5	0.06	8,500	0.0045	1.9 $\pm$ 0.1
NSPL471M2.5D6VATRF		470	117.5	0.06	10,200	0.003	1.9 $\pm$ 0.1
NSPL121M4DZATRF	4.0	120	48	0.06	6,300	0.009	1.0 max.
NSPL680M6.3DZATRF	6.3	68	42.8	0.06	6,300	0.009	1.0 max.

RIPPLE CURRENT TEMPERATURE CORRECTION FACTORS

Case Code	$\leq +45^\circ\text{C}$	$>+45^\circ\text{C} \sim \leq +85^\circ\text{C}$	$>+85^\circ\text{C} \sim +105^\circ\text{C}$
All	1.0	0.7	0.25

PART NUMBERING SYSTEM

NSPL 471 M 4 D6 Z A TR F
 Series Capacitance Code in μ F, first 2 digits are significant, third digits no. of zeros Tolerance Code M=20% Working Voltage Case Size Performance Code Peak Reflow Temperature Code (A = +260°C) Tape and Reel RoHS Compliant



NIC COMPONENTS CORP.

www.niccomp.com


SPECIFICATIONS ARE SUBJECT TO CHANGE

Surface Mount Specialty Polymer Solid Aluminum Electrolytic Capacitors

NSPL Series



DIMENSIONS (mm)

Case Code	L ±0.2	W1 ±0.2	H	W2 ±0.1	P1 ±0.3	P2 ±0.1	P3 ±0.2	P4 ±0.2
D, D1, D5, D6	7.3	4.3	see values table	2.4	1.3	1.1	0.7	1.4

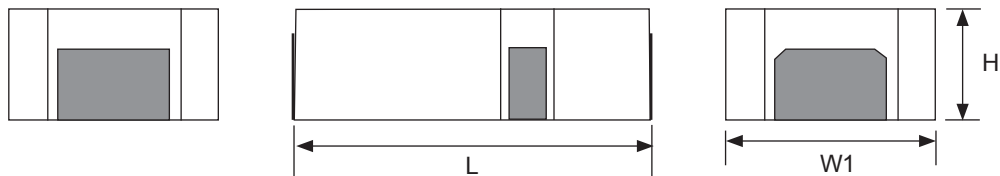


VOLTAGE CODES


Voltage	Code
2.0Vdc	d
2.5Vdc	e
4.0Vdc	g
6.3Vdc	j

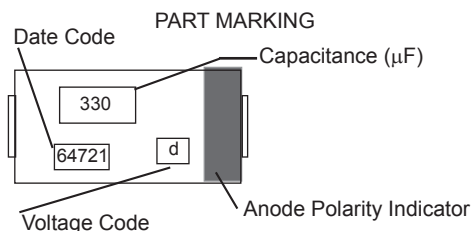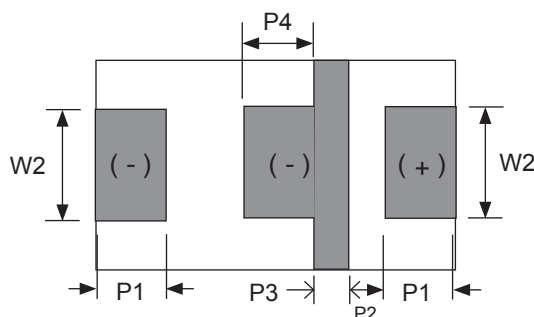

RECOMMENDED LAND PATTERN DIMENSIONS (mm)

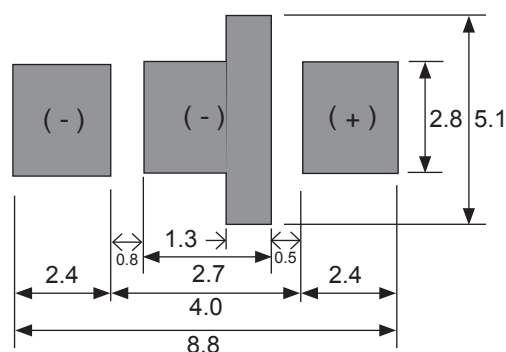

RECOMMENDED 260°C REFLOW SOLDERING PROFILE

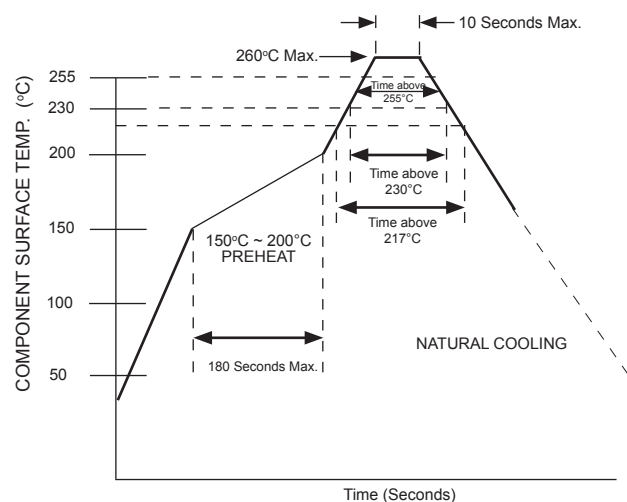

Item	Maximum Duration
Peak Temperature +260°C	10 seconds max.
Time above +255°C	30 seconds max.
Time above +230°C	130 seconds max.
Time above +217°C	150 seconds max.

Notes: Compliant to IPC/J-STD-020D standard

1. SAC alloy (+217°C) reflow soldering compatible
2. Soldering heat limits apply to the top surface of component
3. If you have concerns about your reflow soldering profile review them with NIC to insure compatible [tpmg@niccomp.com]
4. Three reflow passes are allowed (cooling down period to room temperature between each pass).

Storage Conditions:

Temperature: +5°C ~ +30°C

Humidity: <60% RH

Packaging: Moisture barrier bag

Storage Time: Parts should be soldered within 2 years of the production date and/or within 7 days of opening the moisture barrier bag.



NIC COMPONENTS CORP.

www.niccomp.com


SPECIFICATIONS ARE SUBJECT TO CHANGE

Surface Mount Specialty Polymer Solid Aluminum Electrolytic Capacitors

NSPL Series


CARRIER TAPE DIMENSIONS (mm)

Case Code	A $\pm$ 0.2	B $\pm$ 0.2	D ϕ	E $\pm$ 0.1	F $\pm$ 0.1	P ₀ $\pm$ 0.1	P ₁ $\pm$ 0.1	t $\pm$ 0.2	W $\pm$ 0.3
D, D5 D1, D6	7.6	4.5	1.5 ^{+0.1}	5.50	1.75	4.0	8.0	$\frac{1.5}{2.4}$	12.0

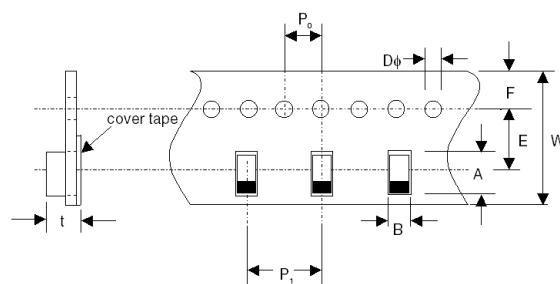

REEL DIMENSIONS (mm)

A $\pm$ 2.0	B min.	C $\pm$ 0.5	D $\pm$ 0.8	E $\pm$ 0.5	T $\pm$ 1.0	t	W $\pm$ 1.0
ϕ 330	ϕ 80	ϕ 13.0	ϕ 21.0	2.0	20.0	3.0	14

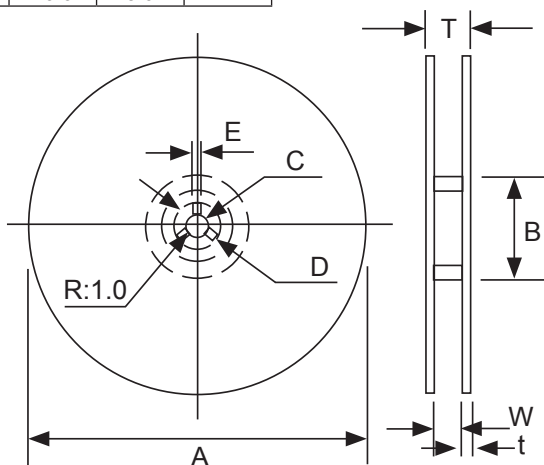

Case Code	Reel Quantity
All	3,500