
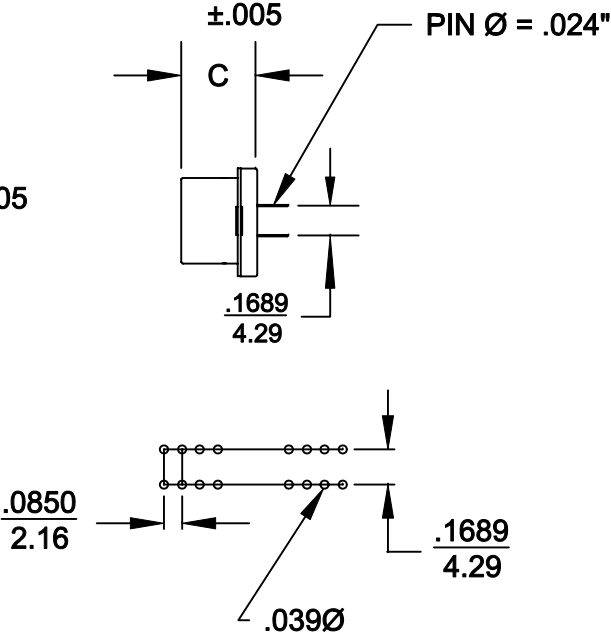
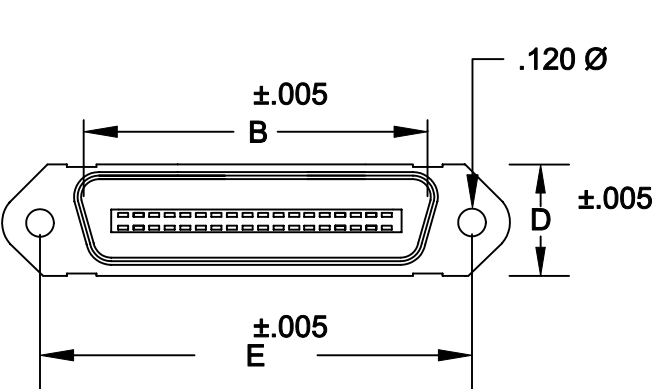


DESCRIPTION: .085" RIBBON DIP SOLDER

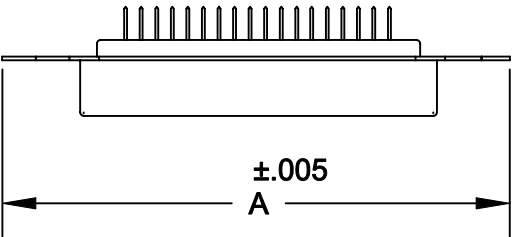

	A	B	C	D	E
14	1.729	.992	.502	.602	1.417
	43.92	25.20	12.75	15.30	35.99
24	2.154	1.417	.502	.602	1.843
	54.71	36.00	12.75	15.30	46.79
36	2.665	1.925	.502	.602	2.352
	67.69	48.90	12.75	15.30	59.74
50	3.047	2.538	.502	.602	2.947
	77.40	64.47	12.75	15.30	74.85

111-XXX-113L001

SERIES _____

POSITIONS _____

014

024

036

050

GENDER _____

1 = MALE

TERMINATION _____

1 = DIP SOLDER

SHELL PLATING _____

3 = NICKEL

HARDWARE OPTIONS _____

00 = NO HARDWARE

PLATING OPTIONS _____

01 = GOLD FLASH

MATERIALS:

INSULATOR: GLASS-FILLED THERMOPLASTIC
UL RATED 94V-0 - 230°C PROCESS TEMP.
CONTACTS: COPPER ALLOY
SHELL: STEEL, NICKEL PLATED
RoHS COMPLIANT

ELECTRICALS:
CONTACT CURRENT RATING: 5 AMPS
DIELECTRIC WITHSTANDING VOLTAGE: AC 1200 R.M.S.
INSULATION RESISTANCE: 1000 mohms MINIMUM AT 500V DC
CONTACT RESISTANCE: 30 mOHMS MAXIMUM
OPERATING TEMPERATURE: -55°C TO +125°C

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS		DATE: 9-21-98	
			CHECKED:		DATE:	
	NorComp		SCALE: 1:1	SHEET 1 OF 1	REV 2	
			DWG NO. 111-XXX-113L001			