


Features

- Rated voltage 275Vac (UL, CSA 250V).
- IEC/EN 60384-14 class X2.

Applications


- Designed mainly for suppressing noise occurring in power line of electrical appliances.

• Dimensions

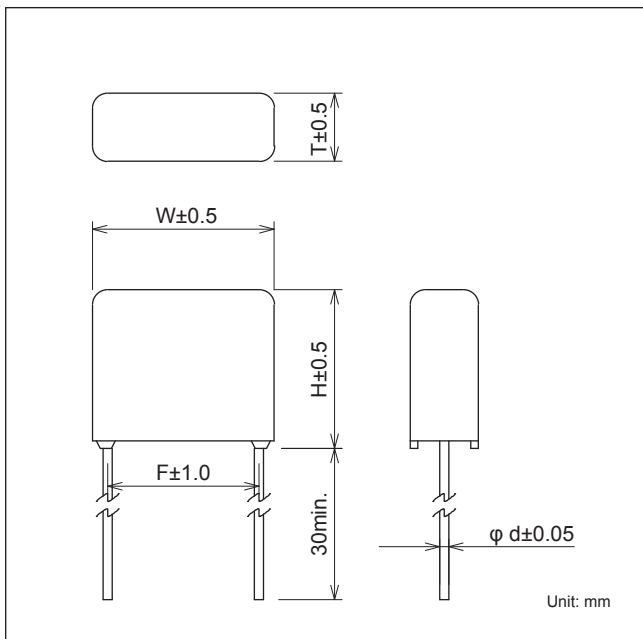



Safety Standard	File No.
UL	:UL-60384-14 E47474
cUL	:CSA E60384-14 E47474
CSA	:CSA E60384-14, C22.2 No.8 LR37404, LR104926
VDE	:IEC/EN 60384-14 094750X
SEMKO	:IEC/EN 60384-14 103400, 916932
NEMKO	:IEC/EN 60384-14 P08208949, P10211810
DEMKO	:IEC/EN 60384-14 144191-01, 315279-01
FIMKO	:IEC/EN 60384-14 FI 24150A2, FI 25644
Electrosuisse	:IEC/EN 60384-14 13.0339, 13.0068
ENEC	:IEC/EN 60384-14 40028657

The "ENEC" mark is a common European product certification mark based on testing to harmonised European safety standard. The mark with #10 stands for VDE.

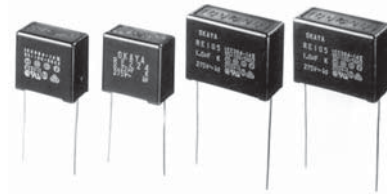


Before change to markings

• Circuit



After change to markings

• Model numbering system

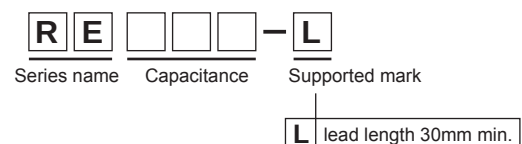

Electrical Specifications

Rated Voltage **275Vac (UL, CSA: 250V)**

Safety Standard	Class	Model Number	Capacitance μF±10%	Dimensions					Dissipation Factor	Test Voltage	Insulation Resistance
				W	H	T	F	d			
	X2	RE103-L	0.01	12.0	10.5	4.5	10.0	0.6	C≤1μF 0.003max. (f=10kHz)	Line to Line 1,250Vac 50/60Hz 60sec	Line to Line 103~334 15,000MΩmin. 474~225 5,000Ω•Fmin.
		RE153-L	0.015			5.5					
		RE223-L	0.022		11.5	5.0	15.0				
		RE333-L	0.033			6.0					
		RE473-L	0.047	17.0	11.0	5.0	15.0				
		RE683-L	0.068			6.0					
		RE104-L	0.1		12.0	8.0	22.5				
		RE154-L	0.15			9.0					
		RE224-L	0.22		17.5	8.0	27.5				
		RE334-L	0.33			9.5					
		RE474-L	0.47	25.5	21.0	10.5	0.8	C>1μF 0.002max. (f=1kHz)	Line to Case 2,000Vac 50/60Hz 60sec	Line to Case 100,000MΩmin. (at 100Vdc)	
		RE684-L	0.68			12.5					
		RE105-L	1.0		23.0	17.0					
		RE155-L	1.5			20.5					
		RE225-L	2.2								

Operating Temperature: -55~+100°C