

MATERIAL & SPECIFICATIONS

PART NO.	A22003-001	REV	ECO	DATE	APP
		E	96201	09-18-09	TLM

INSULATOR: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138.


CONTACT: COPPER ALLOY PER MIL-DTL-83513. GOLD PLATED PER ASTM B488, (HARD GOLD) TYPE II CODE C CLASS 1.27.

TERMINATION: 26 AWG (7-34) TYPE E PER NEMA HP3, COLOR CODED PER TABLE.


CURRENT CAPACITY 3 AMP MAX.

CONTACT RESISTANCE 26 MILLIOHMS (65 mv) MAX @ 2.5 AMPS



PERFORMANCE : PRODUCT FAMILY TESTED TO AND PASSED THE PERFORMANCE SPECIFICATIONS OF TABLE VII OF MIL-DTL-83513



ACTUAL SIZE
EXCLUDING WIRE LENGTH

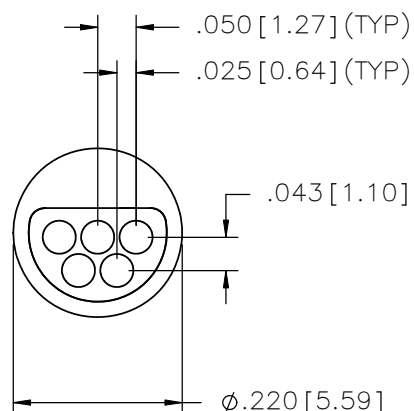

LOADING VIEW
LESS EPOXY

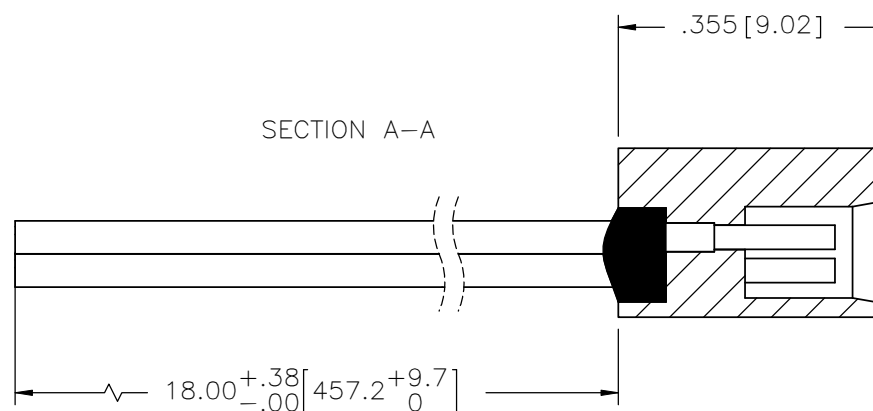

SOCKET #	COLOR
1	BLACK
2	BROWN
3	RED
4	ORANGE
5	YELLOW

REF: OMNETICS

MCS	THIRD ANGLE 		THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.		OMNETICS CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873		
	-TOLERANCES-					DWG NO.		
	UNLESS OTHERWISE NOTED					A22003-001		
	DIMENSIONS IN INCHES					SHEET 1 OF 1		
	2 PL DEC± .01					REV		
SLDW	3 PL DEC± .005		DFTM. PER	DATE	TITLE:	SCALE: 4:1		
	4 PL DEC± .0005		CHK'D.	DATE		(5) SOCKET FEMALE	E	
	ANGLES ± 1°		APP'D.	DATE				CIRCULAR

OMNETICS
CONNECTOR CORPORATION
7260 COMMERCE CIRCLE EAST
MINNEAPOLIS, MN 55432
WWW.OMNETICS.COM