

# MUR3020PTG, SUR83020PTG, MUR3040PTG, MUR3060PTG, SUR83060PTG

## SWITCHMODE Power Rectifiers

These state-of-the-art devices are designed for use in switching power supplies, inverters and as free wheeling diodes.

### Features

- Ultrafast 35 and 60 Nanosecond Recovery Time
- 175°C Operating Junction Temperature
- High Voltage Capability to 600 V
- Low Forward Drop
- Low Leakage Specified @ 150°C Case Temperature
- Current Derating Specified @ Both Case and Ambient Temperatures
- Epoxy Meets UL 94 V-0 @ 0.125 in
- High Temperature Glass Passivated Junction
- ESD Ratings:
  - ◆ Machine Model = C (> 400 V)
  - ◆ Human Body Model = 3B (> 16,000 V)
- AEC-Q101 Qualified and PPAP Capable
- SUR8 Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements
- All Packages are Pb-Free\*

### Mechanical Characteristics:


- Case: Epoxy, Molded
- Weight: 4.3 Grams (Approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max for 10 Seconds
- Shipped 30 Units Per Plastic Tube




**ON Semiconductor®**

<http://onsemi.com>

## ULTRAFAST RECTIFIERS 30 AMPERES, 200–600 VOLTS



SOT-93  
(TO-218)  
CASE 340D  
STYLE 2



### MARKING DIAGRAM



A = Assembly Location  
Y = Year  
WW = Work Week  
G = Pb-Free Package  
MUR30x0PT = Device Code  
x = 2, 4, or 6

### ORDERING INFORMATION

| Device      | Package          | Shipping      |
|-------------|------------------|---------------|
| MUR3020PTG  | SOT-93 (Pb-Free) | 30 Units/Rail |
| SUR83020PTG | SOT-93 (Pb-Free) | 30 Units/Rail |
| MUR3040PTG  | SOT-93 (Pb-Free) | 30 Units/Rail |
| MUR3060PTG  | SOT-93 (Pb-Free) | 30 Units/Rail |
| SUR83060PTG | SOT-93 (Pb-Free) | 30 Units/Rail |

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# MUR3020PTG, SUR83020PTG, MUR3040PTG, MUR3060PTG, SUR83060PTG

## MAXIMUM RATINGS (Per Leg)

| Rating                                                                                                                 | Symbol                          | MUR3020PTG/<br>SUR83020PTG                                       | MUR3040PTG | MUR3060PTG/<br>SUR83060PTG                                       | Unit             |
|------------------------------------------------------------------------------------------------------------------------|---------------------------------|------------------------------------------------------------------|------------|------------------------------------------------------------------|------------------|
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage                                 | $V_{RRM}$<br>$V_{RWM}$<br>$V_R$ | 200                                                              | 400        | 600                                                              | V                |
| Average Rectified Forward Current (Rated $V_R$ )<br>Per Leg<br>Per Device                                              | $I_{F(AV)}$                     | 15 @ $T_C = 150^\circ\text{C}$<br>30 @ $T_C = 150^\circ\text{C}$ |            | 15 @ $T_C = 145^\circ\text{C}$<br>30 @ $T_C = 145^\circ\text{C}$ | A                |
| Peak Rectified Forward Current, Per Leg<br>(Rated $V_R$ , Square Wave, 20 kHz)                                         | $I_{FRM}$                       | 30 @ $T_C = 150^\circ\text{C}$                                   |            | 30 @ $T_C = 145^\circ\text{C}$                                   | A                |
| Nonrepetitive Peak Surge Current (Surge applied at<br>rated load conditions, halfwave, single phase, 60 Hz)<br>Per Leg | $I_{FSM}$                       | 200                                                              |            |                                                                  | A                |
| Operating Junction and Storage Temperature                                                                             | $T_J, T_{stg}$                  | - 65 to +175                                                     |            |                                                                  | $^\circ\text{C}$ |

## THERMAL CHARACTERISTICS (Per Diode Leg)

|                                                                        |                                    |           |                    |
|------------------------------------------------------------------------|------------------------------------|-----------|--------------------|
| Maximum Thermal Resistance,<br>Junction-to-Case<br>Junction-to-Ambient | $R_{\theta JC}$<br>$R_{\theta JA}$ | 1.5<br>40 | $^\circ\text{C/W}$ |
|------------------------------------------------------------------------|------------------------------------|-----------|--------------------|

## ELECTRICAL CHARACTERISTICS (Per Diode Leg)

|                                                                                                                                                                 |          |              |              |            |               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------------|--------------|------------|---------------|
| Maximum Instantaneous Forward Voltage (Note 1)<br>( $I_F = 15\text{ Amp}$ , $T_C = 150^\circ\text{C}$ )<br>( $I_F = 15\text{ Amp}$ , $T_C = 25^\circ\text{C}$ ) | $V_F$    | 0.85<br>1.05 | 1.12<br>1.25 | 1.2<br>1.5 | V             |
| Maximum Instantaneous Reverse Current (Note 1)<br>(Rated DC Voltage, $T_J = 150^\circ\text{C}$ )<br>(Rated DC Voltage, $T_J = 25^\circ\text{C}$ )               | $i_R$    | 500<br>10    |              | 1000<br>10 | $\mu\text{A}$ |
| Maximum Reverse Recovery Time<br>( $i_F = 1.0\text{ A}$ , $di/dt = 50\text{ A}/\mu\text{s}$ )                                                                   | $t_{rr}$ | 35           | 60           |            | ns            |

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

1. Pulse Test: Pulse Width = 300  $\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .

MUR3020PTG, SUR83020PTG

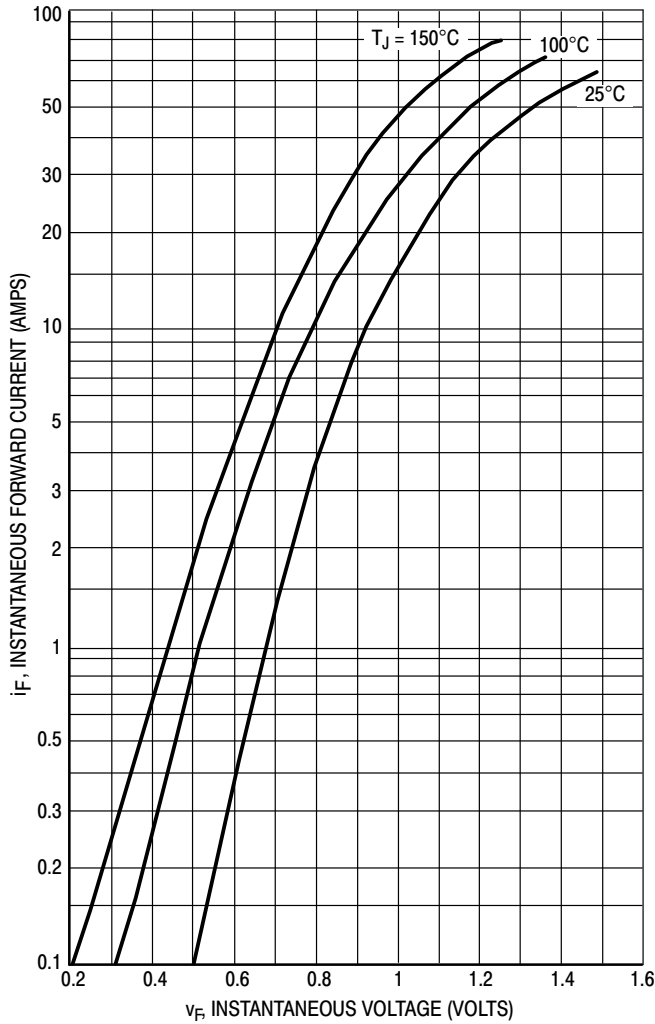


Figure 1. Typical Forward Voltage (Per Leg)

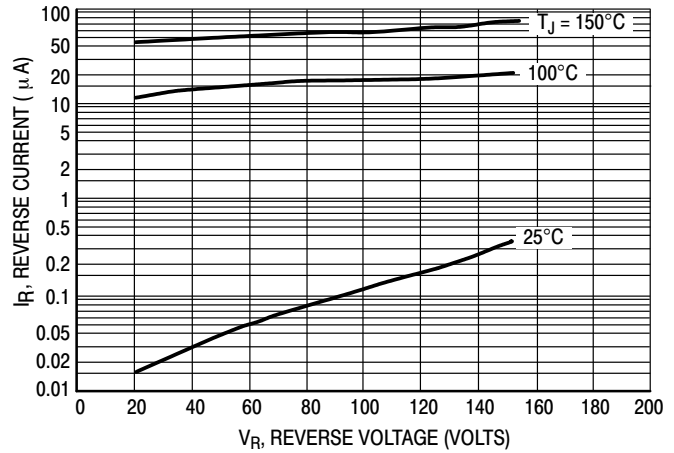


Figure 2. Typical Reverse Current (Per Leg)

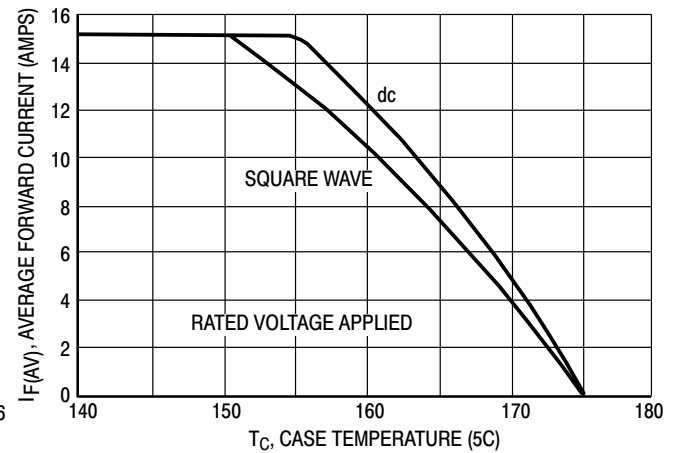


Figure 3. Current Derating, Case (Per Leg)

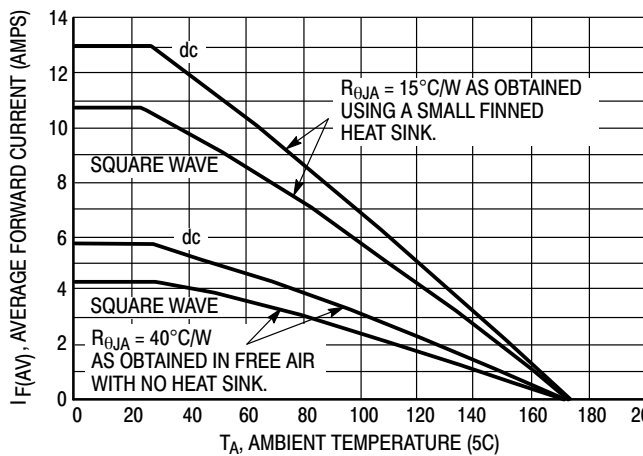


Figure 4. Current Derating, Ambient (Per Leg)






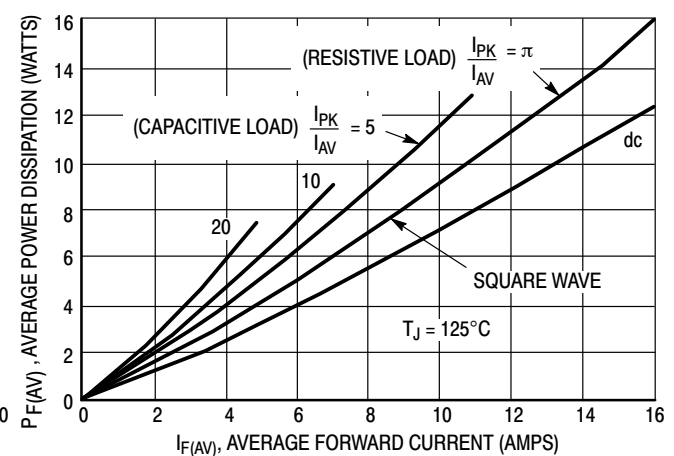


Figure 5. Power Dissipation (Per Leg)

MUR3040PTG

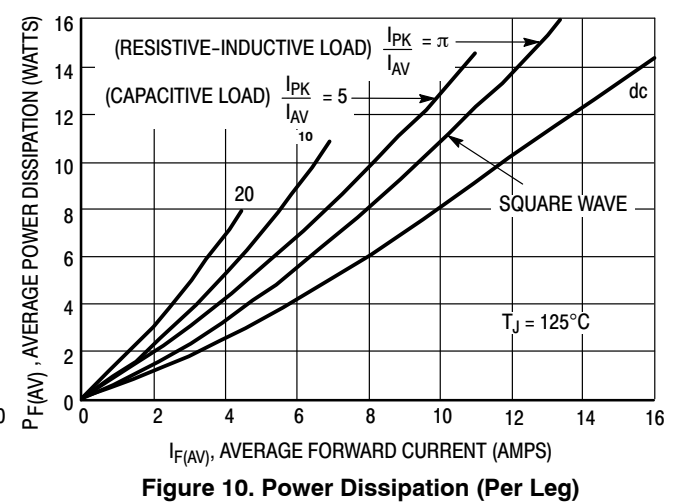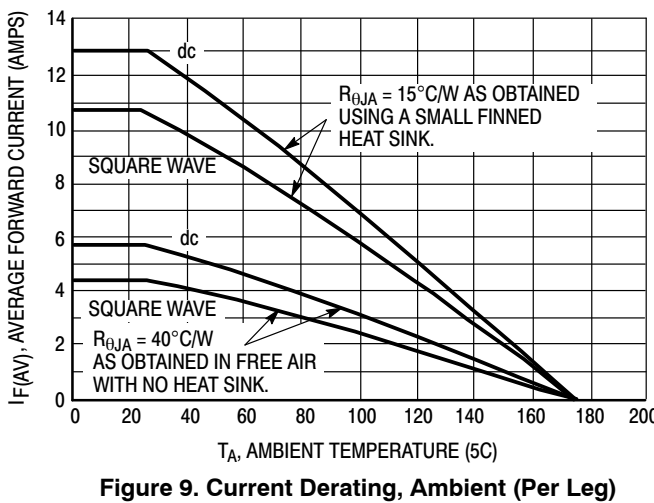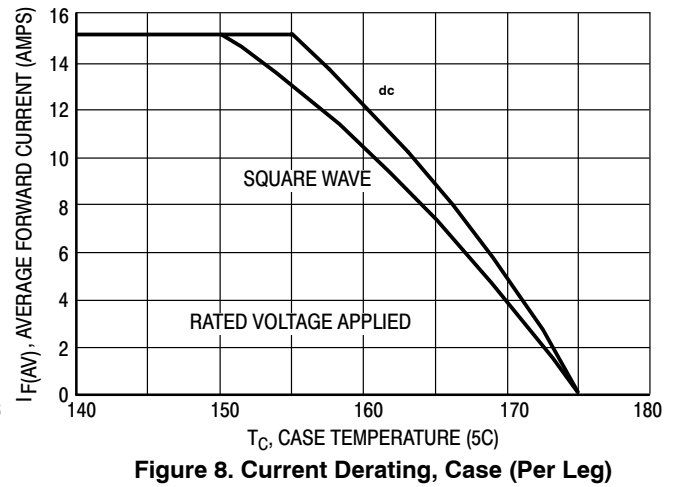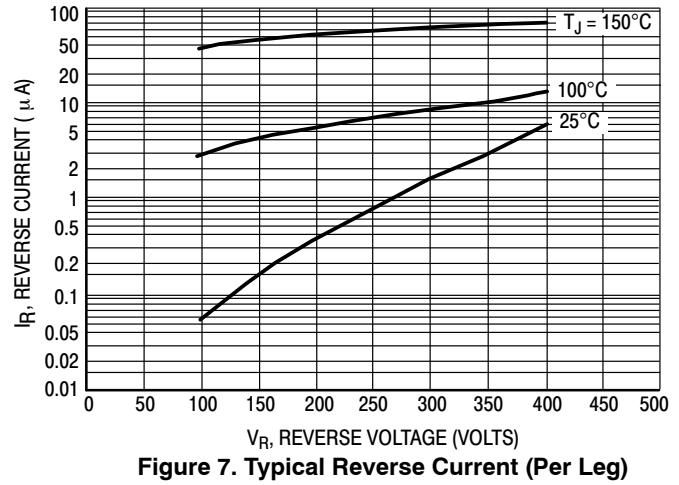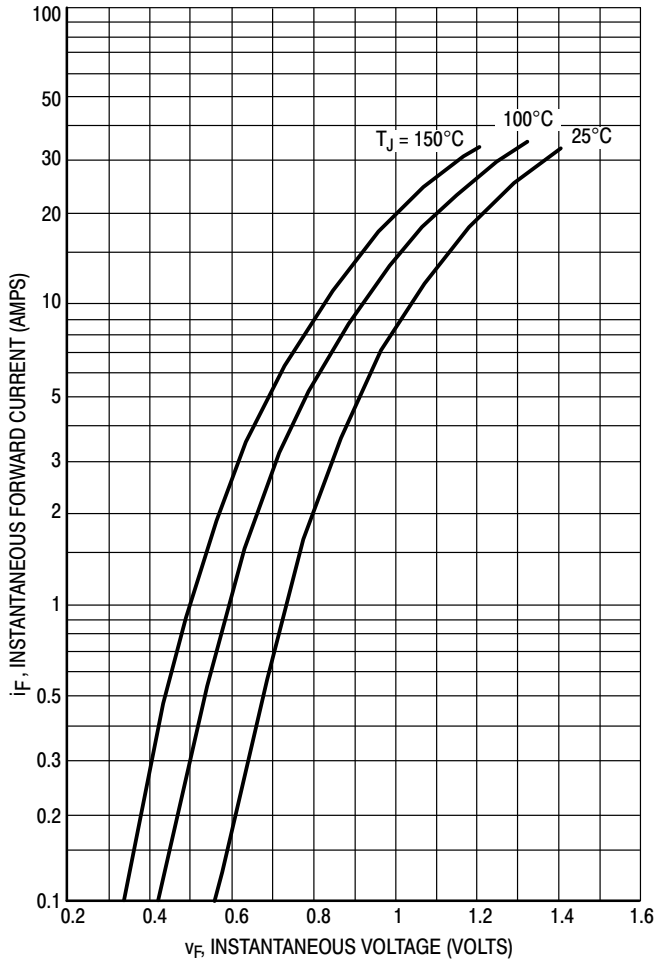

MUR3060PTG, SURS3060PTG

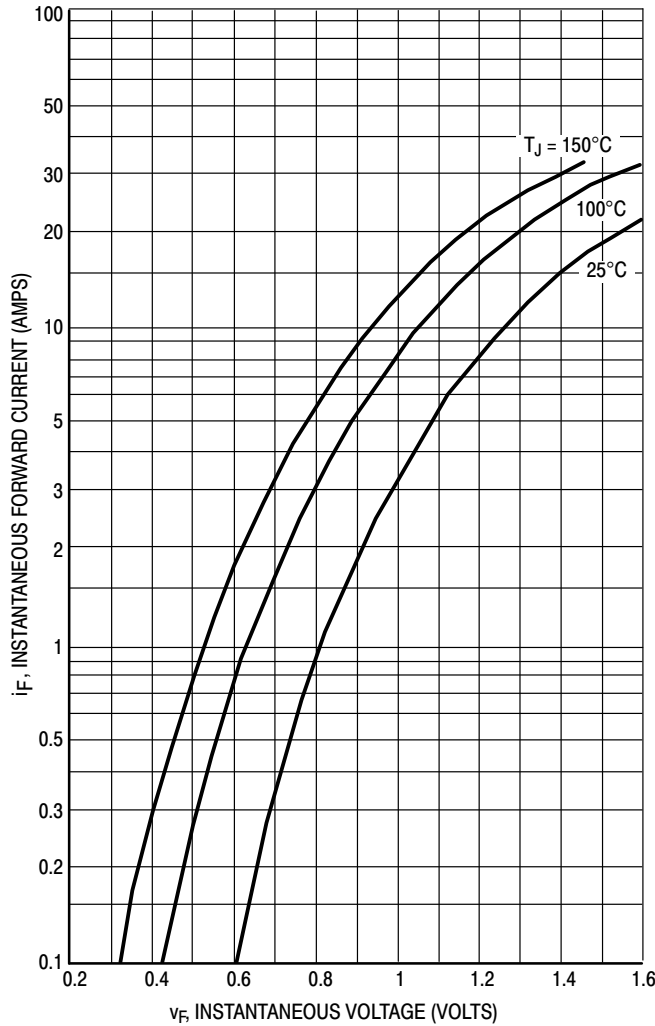


Figure 11. Typical Forward Voltage (Per Leg)

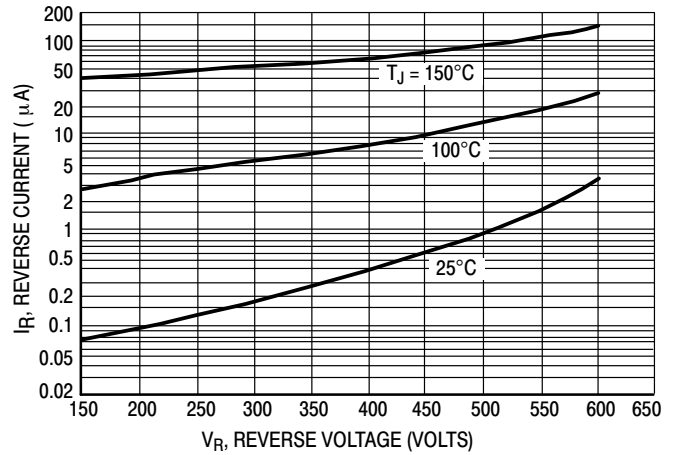


Figure 12. Typical Reverse Current (Per Leg)

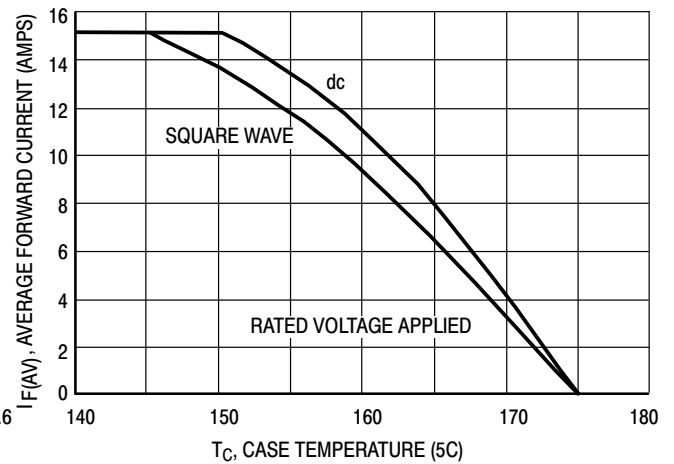


Figure 13. Current Derating, Case (Per Leg)

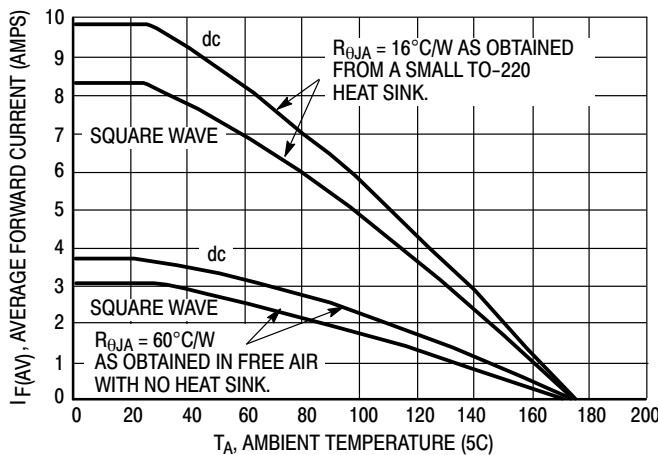


Figure 14. Current Derating, Ambient (Per Leg)

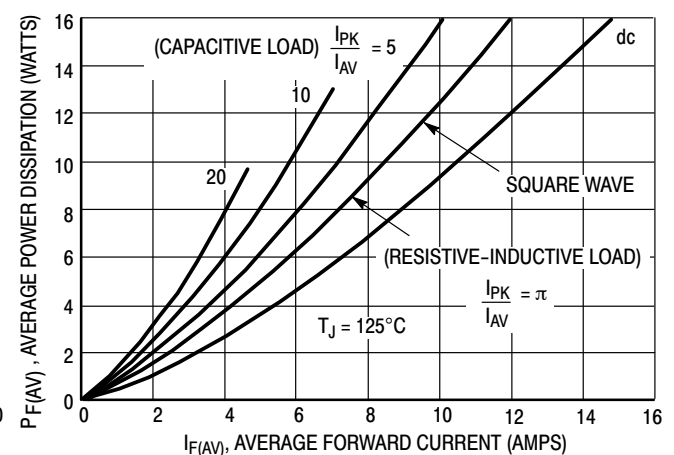


Figure 15. Power Dissipation (Per Leg)

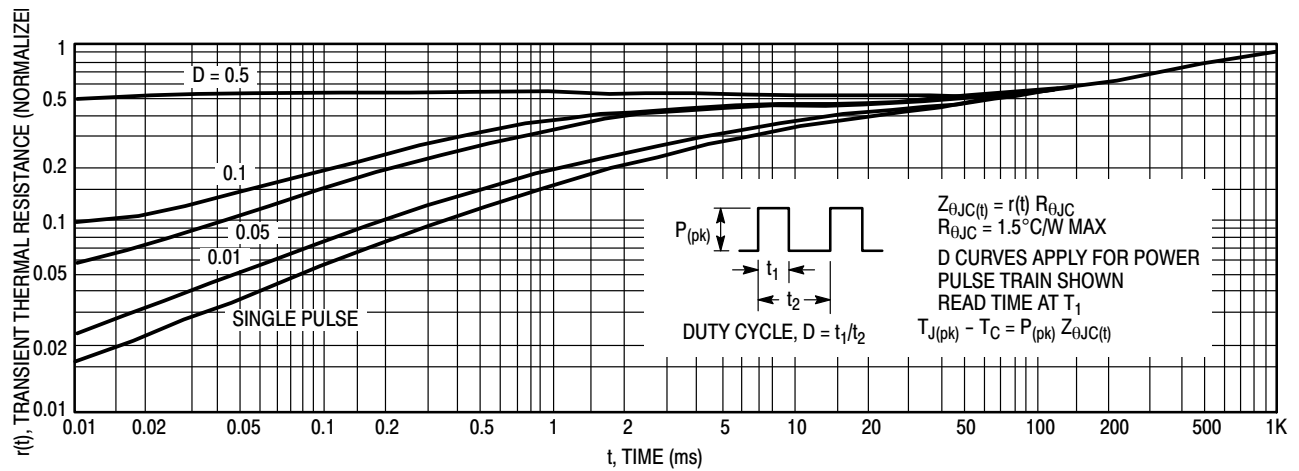


Figure 16. Thermal Response


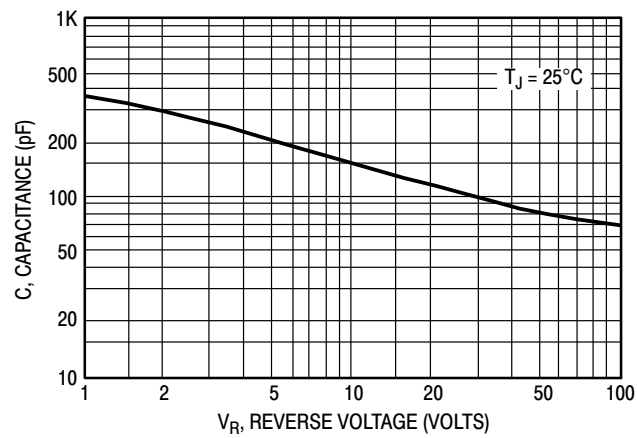


Figure 17. Typical Capacitance (Per Leg)

# MUR3020PTG, SUR83020PTG, MUR3040PTG, MUR3060PTG, SUR83060PTG

## PACKAGE DIMENSIONS

SOT-93 (TO-218)  
CASE 340D-02  
ISSUE E

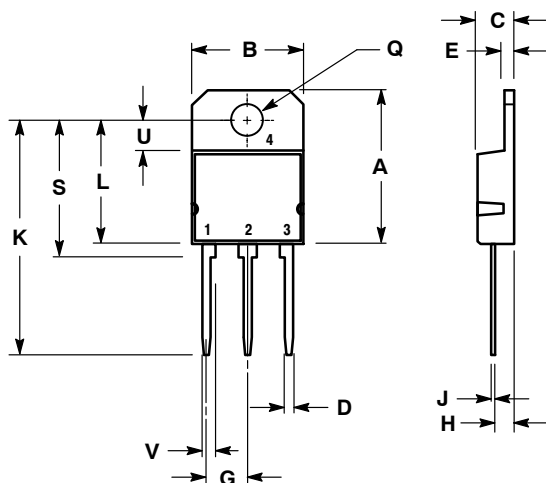

- NOTES:  
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
2. CONTROLLING DIMENSION: MILLIMETER.

| DIM | MILLIMETERS |       | INCHES |       |
|-----|-------------|-------|--------|-------|
|     | MIN         | MAX   | MIN    | MAX   |
| A   | ---         | 20.35 | ---    | 0.801 |
| B   | 14.70       | 15.20 | 0.579  | 0.598 |
| C   | 4.70        | 4.90  | 0.185  | 0.193 |
| D   | 1.10        | 1.30  | 0.043  | 0.051 |
| E   | 1.17        | 1.37  | 0.046  | 0.054 |
| G   | 5.40        | 5.55  | 0.213  | 0.219 |
| H   | 2.00        | 3.00  | 0.079  | 0.118 |
| J   | 0.50        | 0.78  | 0.020  | 0.031 |
| K   | 31.00       | REF   | 1.220  | REF   |
| L   | ---         | 16.20 | ---    | 0.638 |
| Q   | 4.00        | 4.10  | 0.158  | 0.161 |
| S   | 17.80       | 18.20 | 0.701  | 0.717 |
| U   | 4.00        | REF   | 0.157  | REF   |
| V   | 1.75        | REF   | 0.069  | ---   |

- STYLE 2:  
PIN 1. ANODE 1  
2. CATHODE(S)  
3. ANODE 2  
4. CATHODE(S)

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

**MUR3020PT/D**