

MUR3020WT, MUR3060WT

Preferred Devices

SWITCHMODE™ Power Rectifiers

These state-of-the-art devices are designed for use in switching power supplies, inverters and as free wheeling diodes.

Features

- Ultrafast 35 and 60 Nanosecond Recovery Time
- 175°C Operating Junction Temperature
- Popular TO-247 Package
- High Voltage Capability to 600 V
- Low Forward Drop
- Low Leakage Specified @ 150°C Case Temperature
- Current Derating Specified @ Both Case and Ambient Temperatures
- Epoxy Meets UL 94 V-0 @ 0.125 in
- High Temperature Glass Passivated Junction
- Pb-Free Packages are Available*


Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 4.3 Grams (Approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 30 Units Per Plastic Tube





ON Semiconductor®

ULTRAFAST RECTIFIERS 30 AMPERES, 200-600 VOLTS



MARKING DIAGRAM



MUR30x0WT = Device Code
x = 2 or 6
A = Assembly Location
Y = Year
WW = Work Week
G = Pb-Free Package

ORDERING INFORMATION

Device	Package	Shipping
MUR3020WT	TO-247	30 Units/Rail
MUR3020WTG	TO-247 (Pb-Free)	30 Units/Rail
MUR3060WT	TO-247	30 Units/Rail
MUR3060WTG	TO-247 (Pb-Free)	30 Units/Rail

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

Preferred devices are recommended choices for future use and best overall value.

MUR3020WT, MUR3060WT

MAXIMUM RATINGS (Per Leg)

Rating	Symbol	MUR3020WT	MUR3060WT	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	600	V
Average Rectified Forward Current @ 145°C Total Device	$I_{F(AV)}$	15 30		A
Peak Repetitive Surge Current (Rated V_R , Square Wave, 20 kHz, $T_C = 145^\circ\text{C}$)	I_{FM}	30		A
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions, halfwave, single phase, 60 Hz)	I_{FSM}	200	150	A
Operating Junction and Storage Temperature	T_J, T_{stg}	- 65 to +175		°C

THERMAL CHARACTERISTICS (Per Leg)

Maximum Thermal Resistance, – Junction-to-Case – Junction-to-Ambient	$R_{\theta JC}$ $R_{\theta JA}$	1.5 40	°C/W
--	------------------------------------	-----------	------

ELECTRICAL CHARACTERISTICS (Per Leg)


Maximum Instantaneous Forward Voltage (Note 1) ($I_F = 15$ Amp, $T_C = 150^\circ\text{C}$) ($I_F = 15$ Amp, $T_C = 25^\circ\text{C}$)	V_F	0.85 1.05	1.4 1.7	V
Maximum Instantaneous Reverse Current (Note 1) (Rated DC Voltage, $T_J = 150^\circ\text{C}$) (Rated DC Voltage, $T_J = 25^\circ\text{C}$)	i_R	500 10	1000 10	μA
Maximum Reverse Recovery Time ($i_F = 1.0$ A, $di/dt = 50$ Amps/ μs)	t_{rr}	35	60	ns

1. Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$.

MUR3020WT, MUR3060WT

PACKAGE DIMENSIONS

TO-247 PSI
CASE 340L-02
ISSUE D

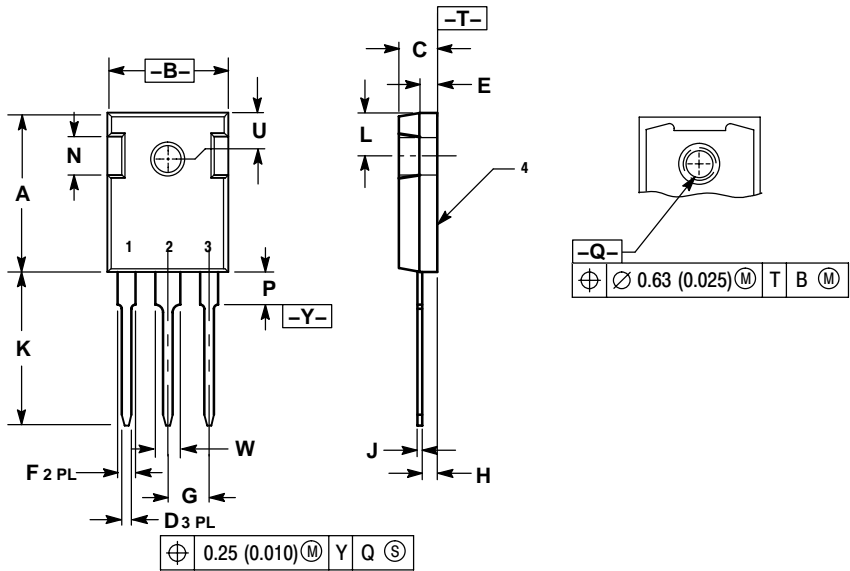

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	20.32	21.08	0.800	0.830
B	15.75	16.26	0.620	0.640
C	4.70	5.30	0.185	0.209
D	1.00	1.40	0.040	0.055
E	2.20	2.60	0.087	0.102
F	1.65	2.13	0.065	0.084
G	5.45 BSC		0.215 BSC	
H	1.50	2.49	0.059	0.098
J	0.40	0.80	0.016	0.031
K	20.06	20.83	0.790	0.820
L	5.40	6.20	0.212	0.244
N	4.32	5.49	0.170	0.216
P	---	4.50	---	0.177
Q	3.55	3.65	0.140	0.144
U	6.15 BSC		0.242 BSC	
W	2.87	3.12	0.113	0.123