




Series: BU-178HT

SMT Machined Dip Socket


- ❖ Insertion diameter, .40 mm min. - .56 mm max.
- ❖ Insertion depth, 2.4 mm min. - 3.8 mm max.
- ❖ Process temperature, 260°C for 10 sec. / 215°C for 2 minutes
- ❖ Four finger clip with funnel design entry
- ❖ Side and end stackable
- ❖ Pin 1 polarized

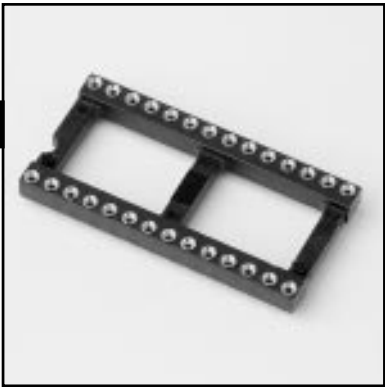

OPTIONAL PICK AND PLACE PAD



RECOMMENDED PCB LAYOUT

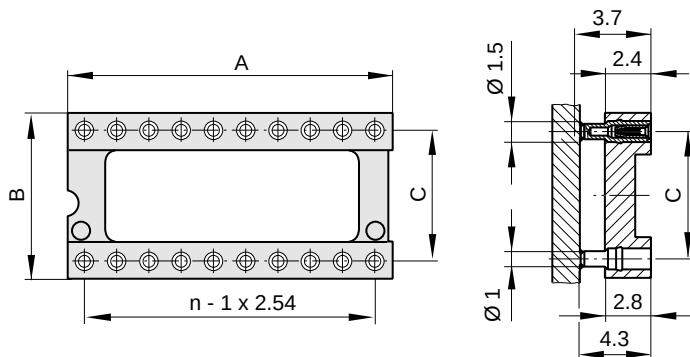

Ordering example: **BU - 14 0 Z - 178HT**

Positions	A	B	C
04	5.08	10.08	7.62
06	7.62	10.08	7.62
08	10.16	10.08	7.62
10	12.70	10.08	7.62
14	17.78	10.08	7.62
16	20.32	10.08	7.62
18	22.86	10.08	7.62
20	25.40	10.08	7.62
22	27.94	10.08	15.24
22*	27.94	10.08	7.62

Positions	A	B	C
24	30.48	17.70	15.24
24*	30.48	10.08	7.62
28	35.56	10.08	15.24
28*	35.56	10.08	7.62
32	40.64	17.70	15.24
36	45.75	17.70	15.24
40	50.80	17.70	15.24
48	60.96	17.70	15.24
50	63.50	25.32	22.86
64	81.28	25.32	22.86

*Add 1 for 7.62 spacing on 22(1), 24(1) and 28(1) positions