


ED 114/DS

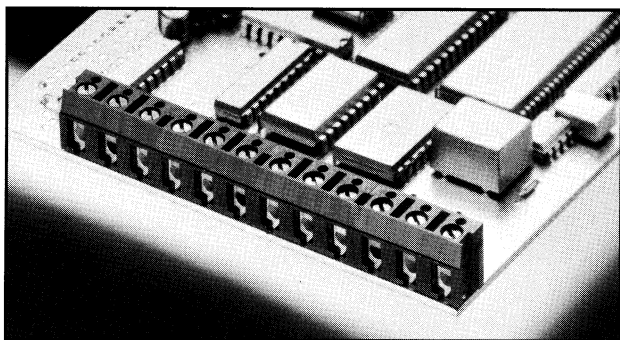

Spacing 7.5 mm
insert required no. of poles ••
How to order see page 6

Ratings:

	 UL1059	 CSA 22.2 No. 158	 EN 60998
Rated Voltage	250 VB	300 VB	500 V
Rated Current	10 A	10 A	32 A (T60)
Wire Size	AWG 22-12	AWG 22-12	4.0 mm ²
Test Voltage			3.0 kV
Rated Torque/Screw Size			0.8 Nm/M3

Rated Cross Section

Single Wire (solid)	4.0 mm ²
Stranded Wire (flexible)	2.5 mm ²
Stranded wire with Ferrules	1.5 mm ²

Dimensions

Spacing	7.5 mm
PCB Hole Diameter	2.0 mmx2.8mm
Stripped Length	7.0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Wire Guard	CuNi
Color	Grey

