


ED 790

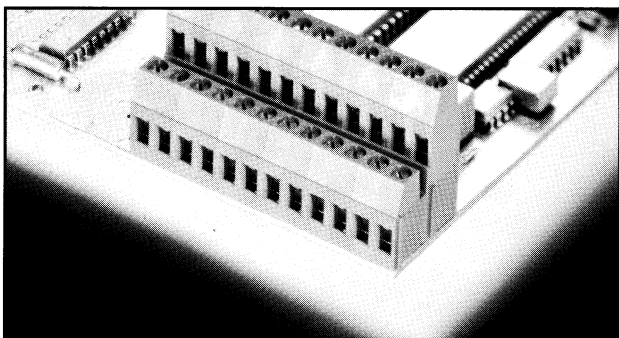

2,4,6,8,10,12 Poles, Spacing 5.0 mm
insert required no. of poles ••
How to order see page 6

Ratings:

*Approvals pending



UL1059



CSA 22.2 No. 158



EN 60998

Rated Voltage	250 VB	300 VB	250 V
Rated Current	15 A	7 A	24 A (T60)
Wire Size	AWG 22-14	AWG 22-14	2.5 mm²
Test Voltage			2.0 kV
Rated Torque/Screw Size			0.5 Nm/M3

Rated Cross Section

Single Wire (solid)	4.0 mm²
Stranded Wire (flexible)	2.5 mm²
Stranded wire with Ferrules	2.5 mm²

Dimensions

Spacing	5.0 mm
PCB Hole Diameter	1.3 mm
Stripped Length	8.0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Wire Guard	Cu
Color	Green

