


ED 793

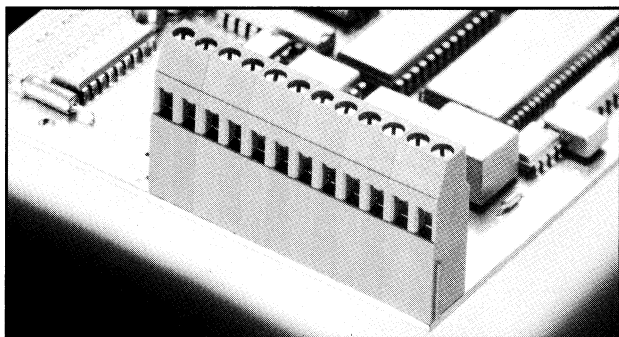

2,4,6,8,10,12 Poles, Spacing 5.0 mm
insert required no. of poles ••
How to order see page 6

Ratings:

*Approvals pending



UL1059



CSA 22.2 No. 158



EN 60998

Rated Voltage

250 VB

300 VB

250 V

Rated Current

15 A

7 A

24 A (T60)

Wire Size

AWG 22-14

AWG 22-14

2.5 mm²

Test Voltage

2.0 kV

Rated Torque/Screw Size

0.5 Nm/M3

Rated Cross Section

Single Wire (solid)

4.0 mm²

Stranded Wire (flexible)

2.5 mm²

Stranded wire with Ferrules

2.5 mm²

Dimensions

Spacing

5.0 mm

PCB Hole Diameter

1.3 mm

Stripped Length

8.0 mm

Materials

Insulating Material

PA

Flammability Class

UL94 V-0

Temperature Range

-30°C/+105°C

Terminal Block

CuZn

Wire Guard

Cu

Color

Green

