


ED 950

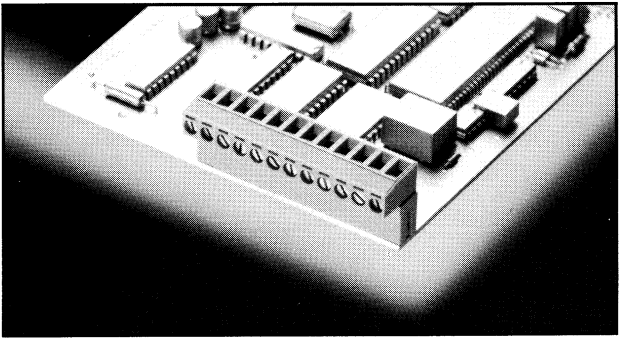

2-24 poles, Spacing 5.0 mm
insert required no. of poles **
How to order see page 6

Ratings:

	 UL1059	 CSA 22.2 No. 158	 DIN VDE 0627
Rated Voltage	250 VB	300 VB	250 V
Rated Current	15 A	16 A	12 A (T60)
Wire Size	AWG 22-12	AWG 22-14	2.5 mm²
Test Voltage			2.21 kV
Rated Torque/Screw Size			0.5 Nm/M3

Rated Cross Section


Single Wire (solid)	2.5 mm ²
Stranded Wire (flexible)	2.5 mm ²
Stranded wire with Ferrules	2.5 mm ²

Dimensions

Spacing	5.0 mm
Stripped Length	6.0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Contact Pin	CuSn
Color	Green

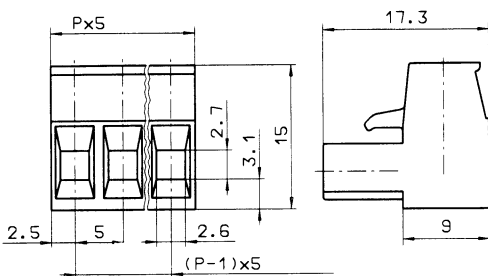

P = No. of Poles