


# EDSTL 955/OE



2-24 poles, Spacing 5.0 mm  
insert required no. of poles \*\*  
How to order see page 6

## Ratings:

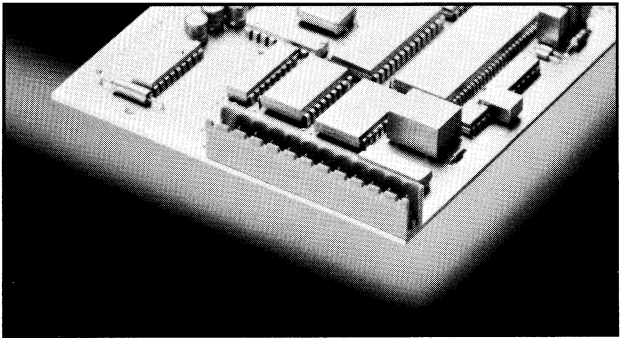

UL1059



CSA 22.2 No. 158



DIN VDE 0627

|               |        |        |            |
|---------------|--------|--------|------------|
| Rated Voltage | 250 VB | 300 VB | 250 V      |
| Rated Current | 15 A   | 16 A   | 12 A (T60) |
| Test Voltage  |        |        | 2.21 kV    |

## Dimensions

|                   |        |
|-------------------|--------|
| Spacing           | 5.0 mm |
| PCB Hole Diameter | 1.4 mm |

## Materials

|                     |              |
|---------------------|--------------|
| Insulating Material | PA           |
| Flammability Class  | UL94 V-0     |
| Temperature Range   | -30°C/+105°C |
| Contact Pin         | Cu           |
| Color               | Green        |

