

OA172 Series 300 cfm




172 x 150 x 51mm
(6.7" x 5.9" x 2.0")



FRAME
Diecast Aluminum
IMPELLER
PBT, UL94V-0 Thermoplastic
POWER CONNECTION
2x lead wires 300mm (12")
or terminals

Finger Guard: G172-10HA,
G172-10H, G172-10LN
Plastic Guard: G172P
Aluminum Filter: WMG172M
Filter Kit: GRM172-45

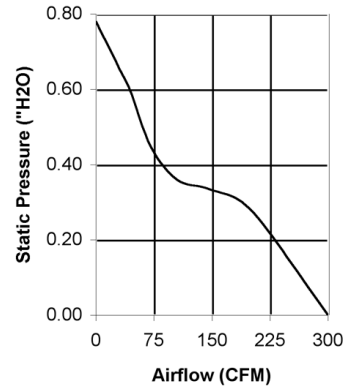

MODEL NUMBER	SPEED (RPM)	AIRFLOW (CFM)	NOISE (DB)	VOLTS AC	VOLTAGE RANGE	WATTS	MAX. STATIC PRESSURE (H ₂ O)
OA172SAP-11-1 * XC	3300	300	61	120	100~125	50	.78
OA172SAP-22-1 * XC	3300	300	61	230	200~240	50	.78

* Indicate "TB" (Terminal Ball Bearing), "WB" (12" Wire Leads, Ball Bearing)

MOTOR



High performance capacitor drive, Impedance and polarity protected

DIELECTRIC STRENGTH

1 minute @ 1500VAC, 50/60Hz

LIFE EXPECTANCY

Ball Bearing
60,000 hours (L10 at 40C)

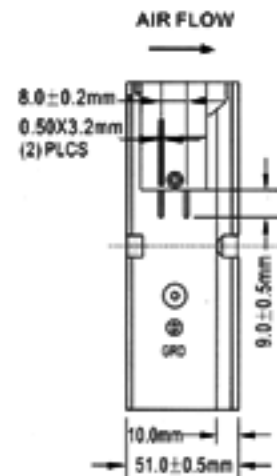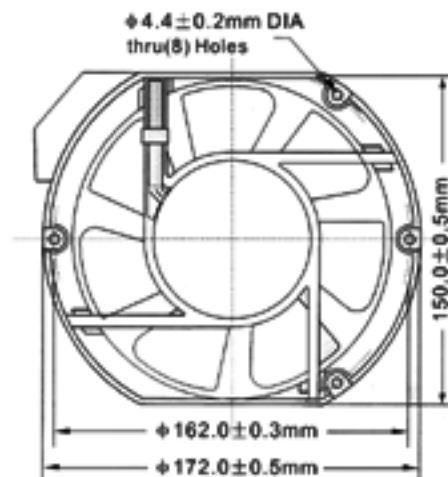

OPERATING TEMPERATURE

Ball Bearing
-20C ~ +80C

Drawing for dimensional reference only. Terminal type shown.